

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing



1412632

<https://www.phoenixcontact.com/us/products/1412632>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B10, for single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x Pg21, height: 57 mm, cable gland: none, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

Item number	1412632
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 606 (C-2-2019)
GTIN	4055626059587
Weight per piece (including packing)	150.9 g
Weight per piece (excluding packing)	150.9 g
Customs tariff number	85389099
Country of origin	PL

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing



1412632

<https://www.phoenixcontact.com/us/products/1412632>

## Technical data


### Notes

General	for contact inserts HC-B10, BB18, DD42, M, K8/24, HV03
General	also available as a powder-coated or color version: 1372756 HC-STA-B10-HLFS-1TTP21-EL/...

### Product properties

Product type	Housing with locking latch
Application	Standard
Type	B10
No. of cable outlets	1
Type of the screw connection	1x Pg21
Housing type	Sleeve housing
Cable outlet	straight
Pg screw connection	none

### Dimensions

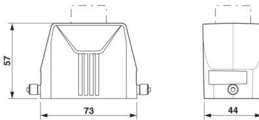Dimensional drawing	
Width	44 mm
Height	57 mm
Length	73 mm

### Material specifications

Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Impact strength	IK08

### Mechanical properties

#### Mechanical data

Type of the screw connection	1x Pg21
Locking type	Pin

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP66
	IP67
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing



1412632

<https://www.phoenixcontact.com/us/products/1412632>

	12 (UL 50e)
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing


1412632

<https://www.phoenixcontact.com/us/products/1412632>



## Drawings

Dimensional drawing

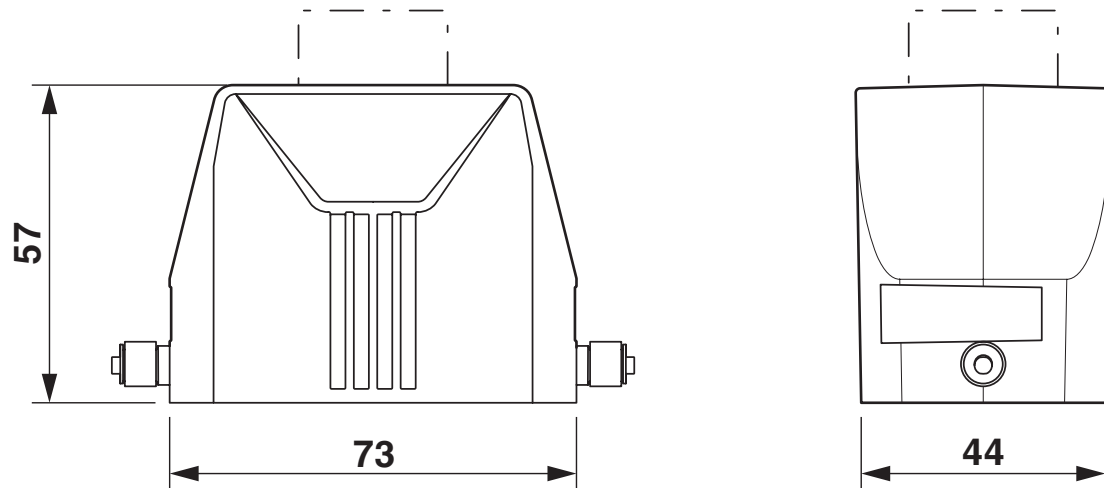

Dimensional drawing

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412632>



**DNV**  
Approval ID: TAE000037S



**cUL Recognized**  
Approval ID: E255026



**UL Recognized**  
Approval ID: E255026



**EAC**  
Approval ID: RU C-DE.AI30.B.01102



**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing



1412632

<https://www.phoenixcontact.com/us/products/1412632>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing



1412632

<https://www.phoenixcontact.com/us/products/1412632>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing



1412632

<https://www.phoenixcontact.com/us/products/1412632>

## Accessories

### G-INS-PG21-M68N-NNES-S - Cable gland

1411175

<https://www.phoenixcontact.com/us/products/1411175>



Cable gland, material for screw connection: Brass, nickel-plated, external cable diameter 13 mm ... 18 mm, shielding: no, connecting thread: Pg21, color: silver, with O-ring

---

### G-INSEC-PG21-M68N-NNES-S - Cable gland

1411200

<https://www.phoenixcontact.com/us/products/1411200>



Cable gland, material for screw connection: Brass, nickel-plated, external cable diameter 13 mm ... 18 mm, shielding: yes, connecting thread: Pg21, color: silver, with O-ring



# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## US-EMLP (20X9) CUS - Plastic label

0830085

<https://www.phoenixcontact.com/us/products/0830085>

Plastic label, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 75



---

## HC-B10-HCWS-PLR-BK - Protective cover

1346528

<https://www.phoenixcontact.com/us/products/1346528>

Protective cover B10, with single locking latch, protective cover material: PC, height: 26.3 mm, seal: yes



# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

---

## WP-G HF IP66 PG21 BK - Screw connection

3240892

<https://www.phoenixcontact.com/us/products/3240892>



Cable gland, Pg thread, IP66 protection, straight

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## WP-G HF IP69K PG21 BK - Screw connection

3240878

<https://www.phoenixcontact.com/us/products/3240878>

Cable gland, Pg thread, IP68/69k protection, straight



---

## WP-GA HF IP66 PG21 BK - Screw connection

3240920

<https://www.phoenixcontact.com/us/products/3240920>

Cable gland, Pg thread, IP66 protection, angled



# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## WP-GA HF IP69K PG21 BK - Screw connection

3240906

<https://www.phoenixcontact.com/us/products/3240906>

Cable gland, Pg thread, IP68/69k protection, angled



---

## WP-GR HF IP66 PG21 BK - Screw connection

3240948

<https://www.phoenixcontact.com/us/products/3240948>

Cable gland, Pg thread, IP66 protection, with strain relief



# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## WP-GR HF IP69K PG21 BK - Screw connection

3240934

<https://www.phoenixcontact.com/us/products/3240934>



Cable gland, Pg thread, IP68/69k protection, with strain relief

---

## WP-G PP HF PG21 - Screw connection

3240992

<https://www.phoenixcontact.com/us/products/3240992>



Cable gland made from PP with Pg thread, IP65 protection

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## WP-GT PP HF PG21 - Screw connection

3241006

<https://www.phoenixcontact.com/us/products/3241006>



Cable gland made from PP with Pg thread, rotatable, IP54 protection

---

## WP-G BRASS IP40 PG21 - Screw connection

3241041

<https://www.phoenixcontact.com/us/products/3241041>



Cable gland made from brass with Pg thread, IP40 protection

# HC-STA-B10-HLFS-1TTP21-EL-AL - Housing

1412632

<https://www.phoenixcontact.com/us/products/1412632>



## WP-GT BRASS PG21 - Screw connection

3241027

<https://www.phoenixcontact.com/us/products/3241027>

Cable gland made from brass with Pg thread, rotatable, IP40 protection



---

## WP-G BRASS IP65 PG21 - Screw connection

3241055

<https://www.phoenixcontact.com/us/products/3241055>

Cable gland made from brass with Pg thread, IP65 protection



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)