

# HC-STA-B16-HHFD-1TTM40-EL-AL - Housing



1412654

<https://www.phoenixcontact.com/pc/products/1412654>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B16, for double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x M40, height: 76 mm, cable gland: none, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1412654             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product key                          | BF7APB              |
| Catalog page                         | Page 624 (C-2-2019) |
| GTIN                                 | 4055626059723       |
| Weight per piece (including packing) | 212 g               |
| Weight per piece (excluding packing) | 212 g               |
| Customs tariff number                | 85389099            |
| Country of origin                    | PL                  |

# HC-STA-B16-HHFD-1TTM40-EL-AL - Housing



1412654

<https://www.phoenixcontact.com/pc/products/1412654>

## Technical data


### Notes

|         |                                                                                           |
|---------|-------------------------------------------------------------------------------------------|
| General | For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K                               |
| General | also available as a powder-coated or color version: 1372782 HC-STA-B16-HHFD-1TTM40-EL/... |

### Product properties

|                              |                            |
|------------------------------|----------------------------|
| Product type                 | Housing with locking latch |
| Application                  | Standard                   |
| Type                         | B16                        |
| No. of cable outlets         | 1                          |
| Type of the screw connection | 1x M40                     |
| Housing type                 | Sleeve housing             |
| Cable outlet                 | straight                   |
| Pg screw connection          | none                       |

### Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 44 mm                                                                                |
| Height              | 76 mm                                                                                |
| Length              | 93.5 mm                                                                              |

### Internal dimensions

|                           |       |
|---------------------------|-------|
| Length of internal thread | 14 mm |
|---------------------------|-------|

### Material specifications

|                          |                                         |
|--------------------------|-----------------------------------------|
| Housing material         | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated                                |
| Impact strength          | IK09                                    |

### Mechanical properties

#### Mechanical data

|                              |        |
|------------------------------|--------|
| Type of the screw connection | 1x M40 |
| Locking type                 | Pin    |

### Environmental and real-life conditions

#### Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP66 |
|----------------------|------|

# HC-STA-B16-HHFD-1TTM40-EL-AL - Housing



1412654

<https://www.phoenixcontact.com/pc/products/1412654>

|                                 |                   |
|---------------------------------|-------------------|
|                                 | IP67              |
| Enclosure rating (NEMA)         | 4 (UL 50e)        |
|                                 | 4X (UL 50e)       |
|                                 | 12 (UL 50e)       |
| Impact strength                 | IK09              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

# HC-STA-B16-HHFD-1TTM40-EL-AL - Housing


1412654

<https://www.phoenixcontact.com/pc/products/1412654>



## Drawings

Dimensional drawing

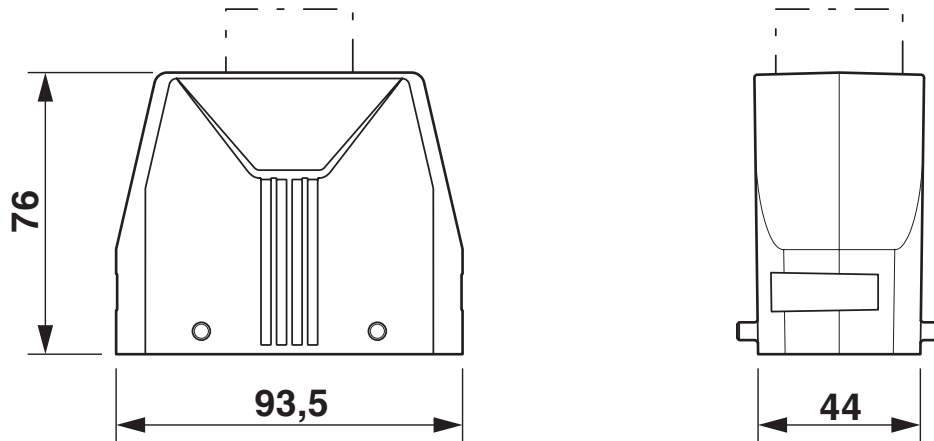

Dimensional drawing

1412654

<https://www.phoenixcontact.com/pc/products/1412654>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1412654>

**DNV**  
Approval ID: TAE000037S

**cUL Recognized**  
Approval ID: E255026

**UL Recognized**  
Approval ID: E255026

**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

# HC-STA-B16-HHFD-1TTM40-EL-AL - Housing



1412654

<https://www.phoenixcontact.com/pc/products/1412654>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)