

1412702

<https://www.phoenixcontact.com/us/products/1412702>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B16, for single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x Pg29, height: 76 mm, cable gland: none, Standard

Your advantages

- Good shielding in the event of electromagnetic interference

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1412702             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF56                |
| Product key                          | BF7APB              |
| Catalog page                         | Page 620 (C-2-2019) |
| GTIN                                 | 4055626059822       |
| Weight per piece (including packing) | 234.7 g             |
| Weight per piece (excluding packing) | 226.09 g            |
| Customs tariff number                | 85389099            |
| Country of origin                    | PL                  |

# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing



1412702

<https://www.phoenixcontact.com/us/products/1412702>

## Technical data


### Notes

|         |                                                                                           |
|---------|-------------------------------------------------------------------------------------------|
| General | For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K                               |
| General | also available as a powder-coated or color version: 1373013 HC-STA-B16-HHFS-1TTP29-EL/... |

### Product properties

|                              |                            |
|------------------------------|----------------------------|
| Product type                 | Housing with locking latch |
| Housing type                 | Sleeve housing             |
| Application                  | Standard                   |
| Type                         | B16                        |
| No. of cable outlets         | 1                          |
| Type of the screw connection | 1x Pg29                    |
| Cable outlet                 | straight                   |
| Pg screw connection          | none                       |

### Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 44 mm                                                                                |
| Height              | 76 mm                                                                                |
| Length              | 93.5 mm                                                                              |

#### Internal dimensions

|                           |       |
|---------------------------|-------|
| Length of internal thread | 14 mm |
|---------------------------|-------|

### Material specifications

|                          |                                         |
|--------------------------|-----------------------------------------|
| Housing material         | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated                                |

### Mechanical properties

#### Mechanical data

|                              |         |
|------------------------------|---------|
| Type of the screw connection | 1x Pg29 |
| Locking type                 | Pin     |

### Environmental and real-life conditions

#### Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP66 |
|                      | IP67 |

# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing



1412702

<https://www.phoenixcontact.com/us/products/1412702>

|                                 |                   |
|---------------------------------|-------------------|
| Enclosure rating (NEMA)         | 4 (UL 50e)        |
|                                 | 4X (UL 50e)       |
|                                 | 12 (UL 50e)       |
| Impact strength                 | IK08              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing


1412702

<https://www.phoenixcontact.com/us/products/1412702>



## Drawings

Dimensional drawing

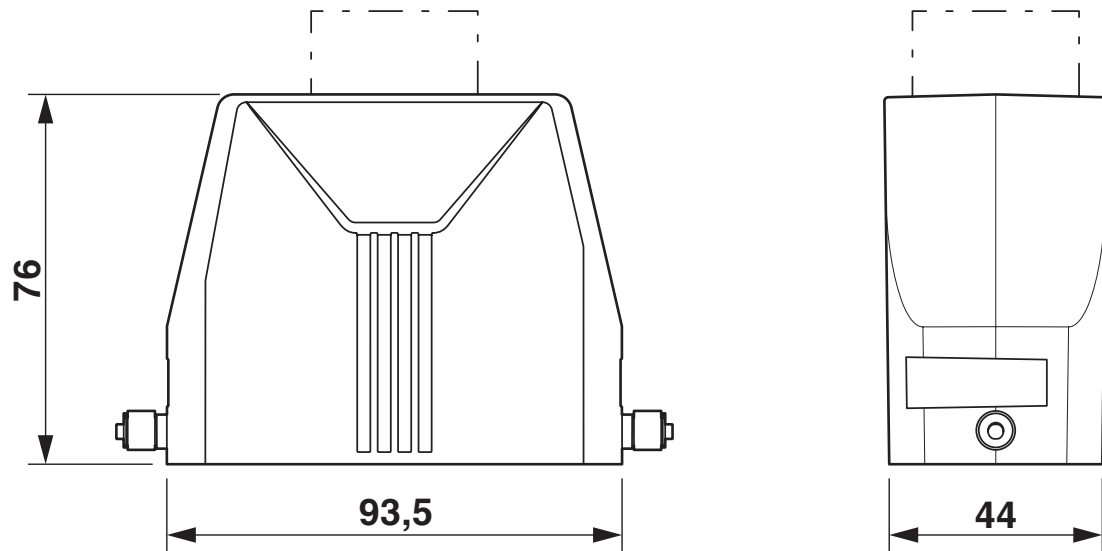

Dimensional drawing

1412702

<https://www.phoenixcontact.com/us/products/1412702>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412702>



**DNV**  
Approval ID: TAE000037S



**cUL Recognized**  
Approval ID: E255026



**UL Recognized**  
Approval ID: E255026



**EAC**  
Approval ID: RU C-DE.AI30.B.01102



**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing



1412702

<https://www.phoenixcontact.com/us/products/1412702>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

1412702

<https://www.phoenixcontact.com/us/products/1412702>

## Accessories

### G-INS-PG29-M68N-NNES-S - Cable gland

1411176

<https://www.phoenixcontact.com/us/products/1411176>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 18 mm ... 25 mm, shielding: no, connecting thread: Pg29, color: silver, with O-ring

---

### G-INSEC-PG29-M68N-NNES-S - Cable gland

1411201

<https://www.phoenixcontact.com/us/products/1411201>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 18 mm ... 25 mm, shielding: yes, connecting thread: Pg29, color: silver, with O-ring



# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing

1412702

<https://www.phoenixcontact.com/us/products/1412702>



## US-EMLP (20X9) CUS - Plastic label

0830085

<https://www.phoenixcontact.com/us/products/0830085>

Plastic label, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 75



---

## HC-B16-HCWS-PLR-BK - Protective cover

1346541

<https://www.phoenixcontact.com/us/products/1346541>

Protective cover B16, with single locking latch, protective cover material: PC, height: 26.3 mm, seal: yes



# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing

1412702

<https://www.phoenixcontact.com/us/products/1412702>



## US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

---

## WP-G HF IP66 PG29 BK - Screw connection

3240893

<https://www.phoenixcontact.com/us/products/3240893>



Cable gland, Pg thread, IP66 protection, straight

# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing

1412702

<https://www.phoenixcontact.com/us/products/1412702>



## WP-G HF IP69K PG29 BK - Screw connection

3240879

<https://www.phoenixcontact.com/us/products/3240879>

Cable gland, Pg thread, IP68/69k protection, straight



---

## WP-GA HF IP66 PG29 BK - Screw connection

3240921

<https://www.phoenixcontact.com/us/products/3240921>

Cable gland, Pg thread, IP66 protection, angled



# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing

1412702

<https://www.phoenixcontact.com/us/products/1412702>



## WP-GR HF IP66 PG29 BK - Screw connection

3240949

<https://www.phoenixcontact.com/us/products/3240949>



Cable gland, Pg thread, IP66 protection, with strain relief

---

## WP-GR HF IP69K PG29 BK - Screw connection

3240935

<https://www.phoenixcontact.com/us/products/3240935>



Cable gland, Pg thread, IP68/69k protection, with strain relief

# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing



1412702

<https://www.phoenixcontact.com/us/products/1412702>

## WP-G PP HF PG29 - Screw connection

3240993

<https://www.phoenixcontact.com/us/products/3240993>

Cable gland made from PP with Pg thread, IP65 protection



---

## WP-GT PP HF PG29 - Screw connection

3241007

<https://www.phoenixcontact.com/us/products/3241007>

Cable gland made from PP with Pg thread, rotatable, IP54 protection



# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing



1412702

<https://www.phoenixcontact.com/us/products/1412702>

## WP-G BRASS IP40 PG29 - Screw connection

3241042

<https://www.phoenixcontact.com/us/products/3241042>

Cable gland made from brass with Pg thread, IP40 protection



---

## WP-GT BRASS PG29 - Screw connection

3241028

<https://www.phoenixcontact.com/us/products/3241028>

Cable gland made from brass with Pg thread, rotatable, IP40 protection



# HC-STA-B16-HHFS-1TTP29-EL-AL - Housing

1412702

<https://www.phoenixcontact.com/us/products/1412702>



## WP-G BRASS IP65 PG29 - Screw connection

3241056

<https://www.phoenixcontact.com/us/products/3241056>

Cable gland made from brass with Pg thread, IP65 protection



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)