

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing



1412835

<https://www.phoenixcontact.com/us/products/1412835>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases B10, with double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 2, lateral, 2x M20, height: 54 mm, cable gland: none, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

Item number	1412835
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 609 (C-2-2019)
GTIN	4055626060934
Weight per piece (including packing)	211.4 g
Weight per piece (excluding packing)	211.4 g
Customs tariff number	85389099
Country of origin	PL

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing



1412835

<https://www.phoenixcontact.com/us/products/1412835>

## Technical data


### Notes

General	For contact inserts HC-B10, BB18, DD42, M, K8/24
General	also available as a powder-coated or color version: 1372791 HC-STA-B10-SLWD-2SSM20-EL/.../...

### Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Application	Standard
Type	B10
No. of cable outlets	2
Type of the screw connection	2x M20
Type	Low design
Cable outlet	lateral
Pg screw connection	none

### Dimensions

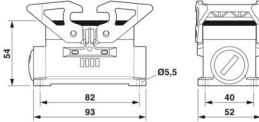Dimensional drawing	
Width	52 mm
Height	54 mm
Length	92 mm
Hole diameter	5.5 mm

### Material specifications

Flammability rating according to UL 94	V0 (Interlock)
Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Locking latch material	PA

### Mechanical properties

#### Mechanical data

Type of the screw connection	2x M20
Locking type	Latch

### Connection data

Tightening torque	2 Nm ... 3 Nm (for M5 mounting screws on the surface-mount housing)
-------------------	---

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing



1412835

<https://www.phoenixcontact.com/us/products/1412835>

## Mounting

Assembly note	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.
---------------	---

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66
	IP67
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing


1412835

<https://www.phoenixcontact.com/us/products/1412835>



## Drawings

Dimensional drawing

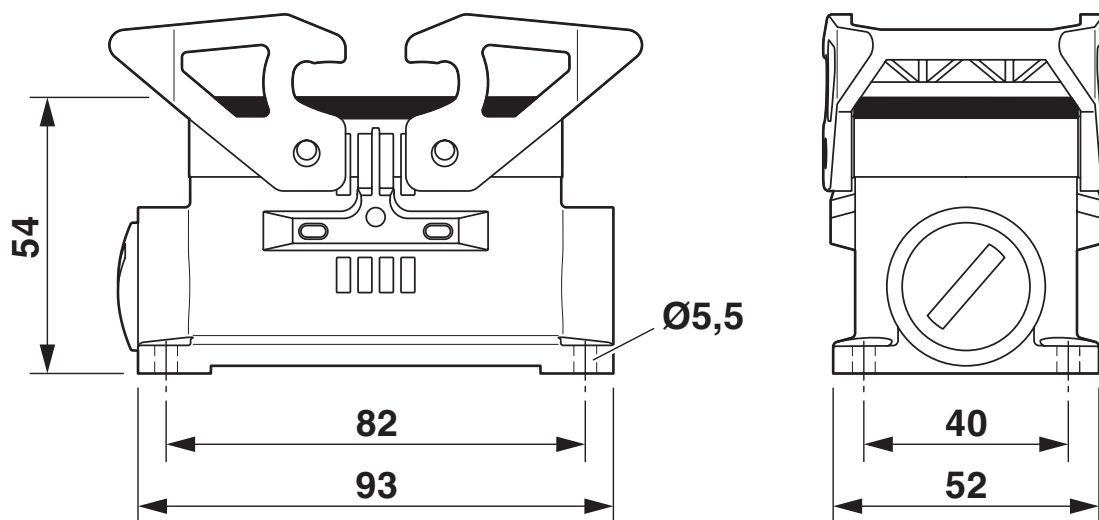

Dimensional drawing

1412835

<https://www.phoenixcontact.com/us/products/1412835>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412835>

**DNV**  
Approval ID: TAE000037S

**cUL Recognized**  
Approval ID: E255026

**UL Recognized**  
Approval ID: E255026

**EAC**  
Approval ID: RU C-DE.AI30.B.01102

**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing



1412835

<https://www.phoenixcontact.com/us/products/1412835>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing



1412835

<https://www.phoenixcontact.com/us/products/1412835>

## Accessories

### G-INS-M20-S68N-NNES-S - Cable gland

1411163

<https://www.phoenixcontact.com/us/products/1411163>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

---

### HC-M-KV-M20(1ASI) - Cable gland

1584017

<https://www.phoenixcontact.com/us/products/1584017>



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M20



# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## HC-B10-SP-CBK - Profile gasket

1411479

<https://www.phoenixcontact.com/us/products/1411479>

Profile gasket for HEAVYCON EVO supporting base element type B10, conductive



---

## HC-STA-B10-24-DL-PLBK - Housing brackets

1412886

<https://www.phoenixcontact.com/us/products/1412886>

Double locking latch for B10 / B16 / B24 housing, HC-EVO....AL and HC-STA....AL



# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## HC-B10-BC-HI-PLBK - Protective cover

1407693

<https://www.phoenixcontact.com/us/products/1407693>

Protective cover B10, for single locking latch, protective cover material: PC, height: 19.1 mm, seal: no



---

## HC-B10-BCFD-P-BK - Protective cover

1346527

<https://www.phoenixcontact.com/us/products/1346527>

Protective cover B10, for double locking latch, protective cover material: PC, height: 26.3 mm, seal: no



## HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## HC-STA-B10-DC-PL - Protective cover

1421101

<https://www.phoenixcontact.com/us/products/1421101>



Protective cover, design: B10

---

## WP-G HF IP66 M20 BK - Screw connection

3240898

<https://www.phoenixcontact.com/us/products/3240898>



Cable gland, metric thread, IP66 protection, straight

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## WP-G HF IP69K M20 BK - Screw connection

3240884

<https://www.phoenixcontact.com/us/products/3240884>



Cable gland, metric thread, IP68/69k protection, straight

---

## WP-GA HF IP66 M20 BK - Screw connection

3240926

<https://www.phoenixcontact.com/us/products/3240926>



Cable gland, metric thread, IP66 protection, angled

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## WP-GA HF IP69K M20 BK - Screw connection

3240912

<https://www.phoenixcontact.com/us/products/3240912>

Cable gland, metric thread, IP68/69k protection, angled



---

## WP-GR HF IP66 M20 BK - Screw connection

3240954

<https://www.phoenixcontact.com/us/products/3240954>

Cable gland, metric thread, IP66 protection, with strain relief



# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## WP-GR HF IP69K M20 BK - Screw connection

3240940

<https://www.phoenixcontact.com/us/products/3240940>



Cable gland, metric thread, IP68/69k protection, with strain relief

---

## WP-G PP HF M20 - Screw connection

3240998

<https://www.phoenixcontact.com/us/products/3240998>



Cable gland made from PP with metric thread, IP65 protection

# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing



1412835

<https://www.phoenixcontact.com/us/products/1412835>

## WP-GT PP HF M20 - Screw connection

3241012

<https://www.phoenixcontact.com/us/products/3241012>

Cable gland made from PP with metric thread, rotatable, IP54 protection



---

## WP-G BRASS IP40 M20 - Screw connection

3241047

<https://www.phoenixcontact.com/us/products/3241047>

Cable gland made from brass with metric thread, IP40 protection



# HC-STA-B10-SLWD-2SSM20-ELC-AL - Housing

1412835

<https://www.phoenixcontact.com/us/products/1412835>



## WP-GT BRASS M20 - Screw connection

3241033

<https://www.phoenixcontact.com/us/products/3241033>

Cable gland made from brass with metric thread, rotatable, IP40 protection



---

## WP-G BRASS IP65 M20 - Screw connection

3241061

<https://www.phoenixcontact.com/us/products/3241061>

Cable gland made from brass with metric thread, IP65 protection



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)