

HC-STA-B16-SLFDC-2SSP16-ELC-AL - Housing



1412852

<https://www.phoenixcontact.com/pc/products/1412852>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases B16, for double locking latch, material: Die-cast aluminum, salt water resistant, protective cover material: PC, cable outlets: 2, lateral, 2x Pg16, height: 68 mm, cable gland: none, protective cover: yes, Standard

Your advantages

- Good shielding in the event of electromagnetic interference

Commercial data

Item number	1412852
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF7APB
Catalog page	Page 627 (C-2-2019)
GTIN	4055626060736
Weight per piece (including packing)	339.3 g
Weight per piece (excluding packing)	334.7 g
Customs tariff number	85389099
Country of origin	PL

HC-STA-B16-SLFDC-2SSP16-ELC-AL - Housing



1412852

<https://www.phoenixcontact.com/pc/products/1412852>

Technical data

Notes

General	For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K
General	also available as a powder-coated or color version: 1372786 HC-STA-B16-SLFDC-2SSP16-EL/.../...


Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Application	Standard
Type	B16
No. of cable outlets	2
Type of the screw connection	2x Pg16
Type	Low design
Protective cover	yes
Cable outlet	lateral
Pg screw connection	none

Data management status

Article revision	05
------------------	----

Dimensions

Dimensional drawing	
Width	57 mm
Height	68 mm
Length	117.5 mm
Hole diameter	5.5 mm

Material specifications

Flammability rating according to UL 94	V0 (Protective cover)
Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Material, protective cover	PC

Mechanical properties

Mechanical data

Type of the screw connection	2x Pg16
Locking type	Pin

Connection data

Tightening torque	2 Nm ... 3 Nm (for M5 mounting screws on the surface-mount housing)
-------------------	---

Mounting

Assembly note	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.
---------------	---

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66 (when plugged in)
	IP67 (when plugged in)
	IP54 (with closed protective cover)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

HC-STA-B16-SLFDC-2SSP16-ELC-AL - Housing


1412852

<https://www.phoenixcontact.com/pc/products/1412852>



Drawings

Dimensional drawing

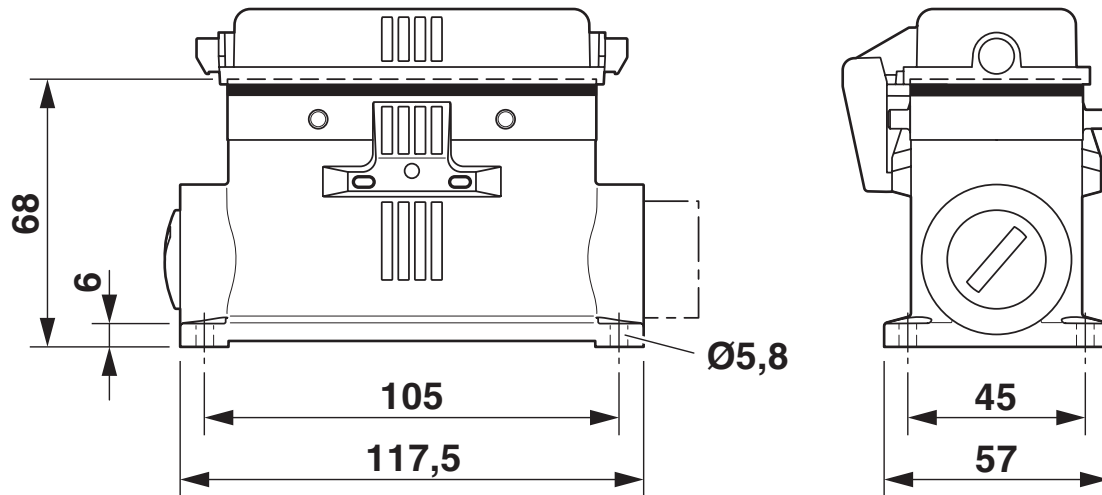

Dimensional drawing

HC-STA-B16-SLFDC-2SSP16-ELC-AL - Housing



1412852

<https://www.phoenixcontact.com/pc/products/1412852>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1412852>

DNV

Approval ID: TAE000037S



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511



cUL Recognized

Approval ID: E255026



UL Recognized

Approval ID: E255026

cULus Recognized

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com