

# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing



1412866

<https://www.phoenixcontact.com/us/products/1412866>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases B16, with single locking latch, material: Die-cast aluminum, salt water resistant, protective cover material: PC, cable outlets: 2, lateral, 2x M32, height: 68 mm, cable gland: none, protective cover: yes, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

Item number	1412866
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 619 (C-2-2019)
GTIN	4055626061153
Weight per piece (including packing)	329.3 g
Weight per piece (excluding packing)	327 g
Customs tariff number	85389099
Country of origin	PL

# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing



1412866

<https://www.phoenixcontact.com/us/products/1412866>

## Technical data


### Notes

General	For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K
General	also available as a powder-coated or color version: 1372617 HC-STA-B16-SLWSC-2SSM32-EL/.../...

### Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Application	Standard
Type	B16
No. of cable outlets	2
Type of the screw connection	2x M32
Type	Low design
Protective cover	yes
Cable outlet	lateral
Pg screw connection	none

### Dimensions

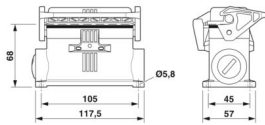Dimensional drawing	
Width	57 mm
Height	68 mm
Length	117.5 mm
Hole diameter	5.5 mm

### Material specifications

Flammability rating according to UL 94	V0 (Interlock)
	V0 (Protective cover)
Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Material, protective cover	PC
Locking latch material	PA

### Mechanical properties

#### Mechanical data

Type of the screw connection	2x M32
Locking type	Latch

Connection data

Tightening torque	2 Nm ... 3 Nm (for M5 mounting screws on the surface-mount housing)
-------------------	---

Mounting


Assembly note	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.
---------------	---

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66 (with locked protective cover)
	IP67 (when plugged in)
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C

## Drawings

Dimensional drawing

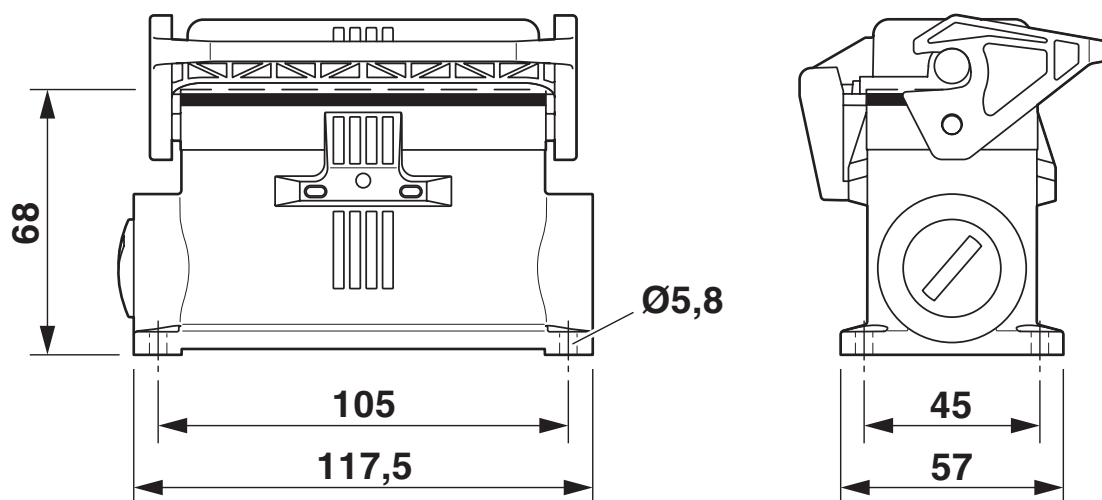

Dimensional drawing


1412866

<https://www.phoenixcontact.com/us/products/1412866>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412866>

**DNV**  
Approval ID: TAE000037S

**EAC**  
Approval ID: RU C-DE.AI30.B.01102

**cUL Recognized**  
Approval ID: E255026

**UL Recognized**  
Approval ID: E255026

**cULus Recognized**

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

1412866

<https://www.phoenixcontact.com/us/products/1412866>

## Accessories

### G-INS-M32-M68N-NNES-S - Cable gland

1411166

<https://www.phoenixcontact.com/us/products/1411166>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 15 mm ... 21 mm, shielding: no, connecting thread: M32 x 1.5, color: silver, with O-ring

---

### G-INSEC-M32-M68N-NCRS-S - Cable gland

1411191

<https://www.phoenixcontact.com/us/products/1411191>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 14 mm ... 21 mm, shielding: yes, connecting thread: M32 x 1.5, color: silver, with O-ring



# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing

1412866

<https://www.phoenixcontact.com/us/products/1412866>



## HC-B16-BC-HI-PLBK - Protective cover

1407694

<https://www.phoenixcontact.com/us/products/1407694>

Protective cover B16, for single locking latch, protective cover material: PC, height: 19 mm, seal: no



---

## HC-B16-SP-CBK - Profile gasket

1411480

<https://www.phoenixcontact.com/us/products/1411480>

Profile gasket for HEAVYCON EVO supporting base element type B16, conductive



# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing

1412866

<https://www.phoenixcontact.com/us/products/1412866>



## HC-STA-B16-SL-PLBK - Housing brackets

1412284

<https://www.phoenixcontact.com/us/products/1412284>



Single locking latch for B16 housing, HC-EVO....AL and HC-STA....AL

---

## HC-STA-B16-DC-PL - Protective cover

1421102

<https://www.phoenixcontact.com/us/products/1421102>



Protective cover, design: B16

# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing

1412866

<https://www.phoenixcontact.com/us/products/1412866>



## WP-G HF IP66 M32 BK - Screw connection

3240900

<https://www.phoenixcontact.com/us/products/3240900>



Cable gland, metric thread, IP66 protection, straight

---

## WP-G HF IP69K M32 BK - Screw connection

3240886

<https://www.phoenixcontact.com/us/products/3240886>



Cable gland, metric thread, IP68/69k protection, straight

# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing

1412866

<https://www.phoenixcontact.com/us/products/1412866>



## WP-GA HF IP66 M32 BK - Screw connection

3240928

<https://www.phoenixcontact.com/us/products/3240928>

Cable gland, metric thread, IP66 protection, angled



---

## WP-GA HF IP69K M32 BK - Screw connection

3240914

<https://www.phoenixcontact.com/us/products/3240914>

Cable gland, metric thread, IP68/69k protection, angled



# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing

1412866

<https://www.phoenixcontact.com/us/products/1412866>



## WP-GR HF IP66 M32 BK - Screw connection

3240956

<https://www.phoenixcontact.com/us/products/3240956>



Cable gland, metric thread, IP66 protection, with strain relief

---

## WP-GR HF IP69K M32 BK - Screw connection

3240942

<https://www.phoenixcontact.com/us/products/3240942>



Cable gland, metric thread, IP68/69k protection, with strain relief

# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing



1412866

<https://www.phoenixcontact.com/us/products/1412866>

## WP-G PP HF M32 - Screw connection

3241000

<https://www.phoenixcontact.com/us/products/3241000>

Cable gland made from PP with metric thread, IP65 protection



---

## WP-GT PP HF M32 - Screw connection

3241014

<https://www.phoenixcontact.com/us/products/3241014>

Cable gland made from PP with metric thread, rotatable, IP54 protection



# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing



1412866

<https://www.phoenixcontact.com/us/products/1412866>

## WP-G BRASS IP40 M32 - Screw connection

3241049

<https://www.phoenixcontact.com/us/products/3241049>

Cable gland made from brass with metric thread, IP40 protection



---

## WP-GT BRASS M32 - Screw connection

3241035

<https://www.phoenixcontact.com/us/products/3241035>

Cable gland made from brass with metric thread, rotatable, IP40 protection



# HC-STA-B16-SLWSC-2SSM32-ELC-AL - Housing

1412866

<https://www.phoenixcontact.com/us/products/1412866>



## WP-G BRASS IP65 M32 - Screw connection

3241063

<https://www.phoenixcontact.com/us/products/3241063>

Cable gland made from brass with metric thread, IP65 protection



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)