

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing



1412870

<https://www.phoenixcontact.com/us/products/1412870>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases B24, for double locking latch, material: Die-cast aluminum, salt water resistant, protective cover material: PC, cable outlets: 2, lateral, 2x M32, height: 68 mm, cable gland: none, protective cover: yes, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

Item number	1412870
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 641 (C-2-2019)
GTIN	4055626061191
Weight per piece (including packing)	349.8 g
Weight per piece (excluding packing)	349 g
Customs tariff number	85389099
Country of origin	CN

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing



1412870

<https://www.phoenixcontact.com/us/products/1412870>

## Technical data


### Notes

General	for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
General	also available as a powder-coated or color version: 1372718 HC-STA-B24-SLFDC-2SSM32-EL/.../...

### Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Application	Standard
Type	B24
No. of cable outlets	2
Type of the screw connection	2x M32
Type	Low design
Protective cover	yes
Cable outlet	lateral
Pg screw connection	none

### Dimensions

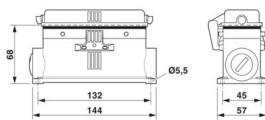Dimensional drawing	
Width	57 mm
Height	68 mm
Length	144 mm
Hole diameter	5.5 mm

### Material specifications

Flammability rating according to UL 94	V0 (Protective cover)
Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Material, protective cover	PC

### Mechanical properties

#### Mechanical data

Type of the screw connection	2x M32
Locking type	Pin

### Connection data

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing



1412870

<https://www.phoenixcontact.com/us/products/1412870>

Tightening torque	2 Nm ... 3 Nm (for M5 mounting screws on the surface-mount housing)
-------------------	---------------------------------------------------------------------

## Mounting

Assembly note	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.
---------------	-----------------------------------------------------------------------------------------

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66 (when plugged in)
	IP67 (when plugged in)
	IP54 (with closed protective cover)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing


1412870

<https://www.phoenixcontact.com/us/products/1412870>



## Drawings

Dimensional drawing

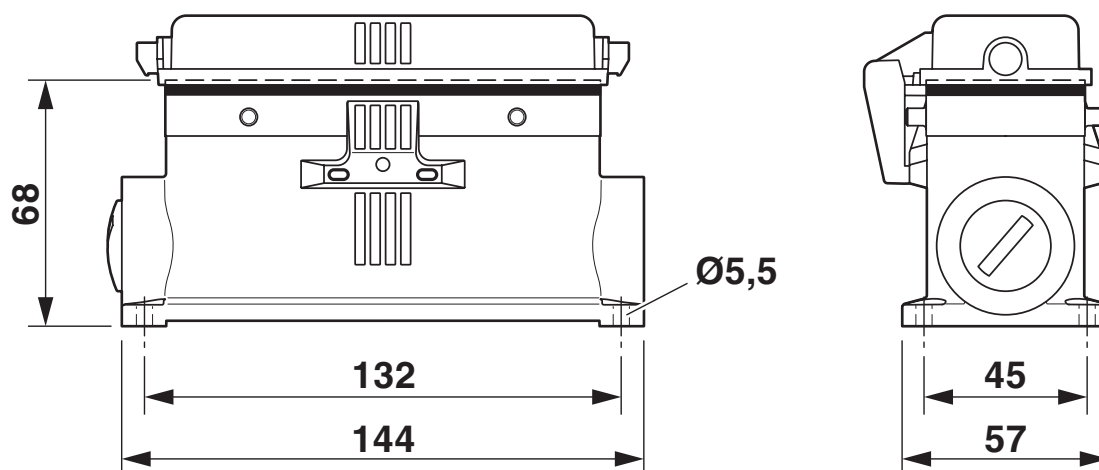

Dimensional drawing

1412870

<https://www.phoenixcontact.com/us/products/1412870>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412870>

### DNV

Approval ID: TAE000037S



### EAC

Approval ID: RU C-DE.AI30.B.01102



### EAC

Approval ID: RU C-DE.BL08.B.00511



### cUL Recognized

Approval ID: E255026



### UL Recognized

Approval ID: E255026

cULus Recognized

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing



1412870

<https://www.phoenixcontact.com/us/products/1412870>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

1412870

<https://www.phoenixcontact.com/us/products/1412870>

## Accessories

### G-INS-M32-M68N-NNES-S - Cable gland

1411166

<https://www.phoenixcontact.com/us/products/1411166>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 15 mm ... 21 mm, shielding: no, connecting thread: M32 x 1.5, color: silver, with O-ring

---

### G-INSEC-M32-M68N-NCRS-S - Cable gland

1411191

<https://www.phoenixcontact.com/us/products/1411191>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 14 mm ... 21 mm, shielding: yes, connecting thread: M32 x 1.5, color: silver, with O-ring



# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing

1412870

<https://www.phoenixcontact.com/us/products/1412870>



## HC-B24-SP-CBK - Profile gasket

1411482

<https://www.phoenixcontact.com/us/products/1411482>



Profile gasket for HEAVYCON EVO supporting base element type B24, conductive

---

## HC-B24-BC-HI-PLBK - Protective cover

1407695

<https://www.phoenixcontact.com/us/products/1407695>



Protective cover B24, for single locking latch, protective cover material: PC, height: 19 mm, seal: no

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing

1412870

<https://www.phoenixcontact.com/us/products/1412870>



## HC-STA-B24-DC-PL - Protective cover

1421103

<https://www.phoenixcontact.com/us/products/1421103>



Protective cover, design: B24

---

## WP-G HF IP66 M32 BK - Screw connection

3240900

<https://www.phoenixcontact.com/us/products/3240900>



Cable gland, metric thread, IP66 protection, straight

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing

1412870

<https://www.phoenixcontact.com/us/products/1412870>



## WP-G HF IP69K M32 BK - Screw connection

3240886

<https://www.phoenixcontact.com/us/products/3240886>

Cable gland, metric thread, IP68/69k protection, straight



---

## WP-GA HF IP66 M32 BK - Screw connection

3240928

<https://www.phoenixcontact.com/us/products/3240928>

Cable gland, metric thread, IP66 protection, angled



# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing

1412870

<https://www.phoenixcontact.com/us/products/1412870>



## WP-GA HF IP69K M32 BK - Screw connection

3240914

<https://www.phoenixcontact.com/us/products/3240914>

Cable gland, metric thread, IP68/69k protection, angled



---

## WP-GR HF IP66 M32 BK - Screw connection

3240956

<https://www.phoenixcontact.com/us/products/3240956>

Cable gland, metric thread, IP66 protection, with strain relief



# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing

1412870

<https://www.phoenixcontact.com/us/products/1412870>



## WP-GR HF IP69K M32 BK - Screw connection

3240942

<https://www.phoenixcontact.com/us/products/3240942>



Cable gland, metric thread, IP68/69k protection, with strain relief

---

## WP-G PP HF M32 - Screw connection

3241000

<https://www.phoenixcontact.com/us/products/3241000>



Cable gland made from PP with metric thread, IP65 protection

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing



1412870

<https://www.phoenixcontact.com/us/products/1412870>

## WP-GT PP HF M32 - Screw connection

3241014

<https://www.phoenixcontact.com/us/products/3241014>



Cable gland made from PP with metric thread, rotatable, IP54 protection

---

## WP-G BRASS IP40 M32 - Screw connection

3241049

<https://www.phoenixcontact.com/us/products/3241049>



Cable gland made from brass with metric thread, IP40 protection

# HC-STA-B24-SLFDC-2SSM32-ELC-AL - Housing



1412870

<https://www.phoenixcontact.com/us/products/1412870>

## WP-GT BRASS M32 - Screw connection

3241035

<https://www.phoenixcontact.com/us/products/3241035>

Cable gland made from brass with metric thread, rotatable, IP40 protection



---

## WP-G BRASS IP65 M32 - Screw connection

3241063

<https://www.phoenixcontact.com/us/products/3241063>

Cable gland made from brass with metric thread, IP65 protection



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)