

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON ADVANCE sleeve housing, B10, with stainless steel screw locking (Allen screw), salt-water-resistant aluminum, height 74 mm, with 1x M25 thread, straight cable outlet, without surface; conductive seal (EMC properties)

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1413390 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF58 |
| Product key | BF7APH |
| Catalog page | Page 603 (C-2-2019) |
| GTIN | 4055626030258 |
| Weight per piece (including packing) | 231.3 g |
| Weight per piece (excluding packing) | 229.32 g |
| Customs tariff number | 85389099 |
| Country of origin | CN |

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

Technical data

Notes

| | |
|---------|--|
| General | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
|---------|--|


Product properties

| | |
|------------------------------|-----------------------------------|
| Product type | Housing with screw locking |
| Housing type | Sleeve housing |
| Product family | HC-ADV |
| Application | Offshore/EMC |
| Type | B10 |
| No. of cable outlets | 1 |
| Type of the screw connection | 1x M25 |
| Type | Low design |
| Fixing screws | M6 (screw head: 5 mm Allen screw) |
| Cable outlet | straight |
| Pg screw connection | none |

Connection data

| | |
|-------------------|--|
| Tightening torque | 3 Nm ... 5 Nm (for M6 mounting screws on the sleeve housing) |
|-------------------|--|

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 57 mm |
| Height | 74 mm |
| Length | 105 mm |

Installation dimensions

| | |
|-------------------------------|-------|
| Width of the assembly cutout | 35 mm |
| Length of the assembly cutout | 65 mm |

Material specifications

| | |
|--------------------------|---|
| Seal material | NBR, conductive |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated |
| Locking latch material | Stainless steel |

Environmental and real-life conditions

Ambient conditions

IP66

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

| | |
|---------------------------------|--------------------------|
| Degree of protection | IP68 (0.2 bar/24 h) |
| | IP69 (ISO 20653:2013-02) |
| Enclosure rating (NEMA) | 4 (UL 50e) |
| | 4X (UL 50e) |
| | 12 (UL 50e) |
| Impact strength | IK09 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

Mechanical properties

Mechanical data


| | |
|------------------------------|--------|
| Type of the screw connection | 1x M25 |
| Locking type | Screw |

Mounting

| | |
|---------------|-----------------------------------|
| Fixing screws | M6 (screw head: 5 mm Allen screw) |
|---------------|-----------------------------------|

Drawings

Dimensional drawing

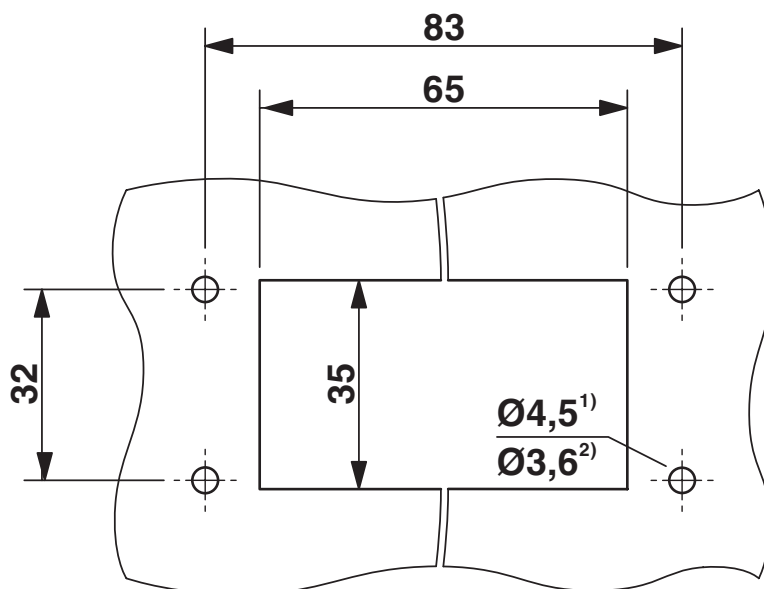


Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)

Dimensional drawing

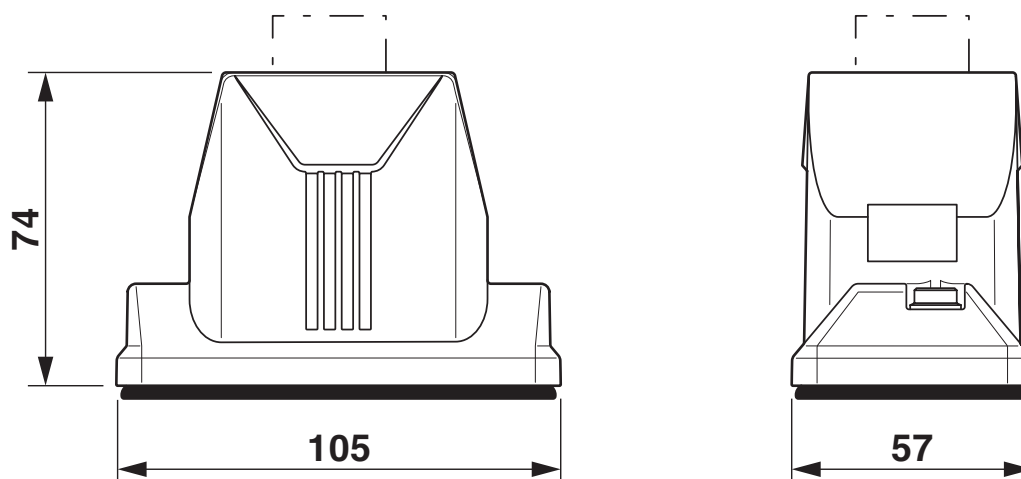

Dimensional drawing

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1413390>

**DNV**
Approval ID: TAE000037S

**cUL Recognized**
Approval ID: E255026

**UL Recognized**
Approval ID: E255026

**EAC**
Approval ID: RU C-DE.AI30.B.01102

**EAC**
Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

1413390

<https://www.phoenixcontact.com/us/products/1413390>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

Accessories

HC-B-AF - Panel-mount flange

1686533

<https://www.phoenixcontact.com/us/products/1686533>

Panel-mount flange for HEAVYCON ADVANCE housing




HC-B-AF-SET - Panel-mount flange

1604638

<https://www.phoenixcontact.com/us/products/1604638>

Panel-mount flange for HEAVYCON ADVANCE housing, set consisting of:
2 panel-mount flanges with 4 self-tapping screws (M4, Torx®) and 4 fan-type washers



HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

HC-B 10-TMS-SD-IP50 - Protective cover

1690749

<https://www.phoenixcontact.com/us/products/1690749>



Protective cover B10, with clip locking, protective cover material: PA, height: 31.2 mm, seal: no, with lanyard

HC-B 10-TMS-SD-IP66 - Protective cover

1411504

<https://www.phoenixcontact.com/us/products/1411504>



HEAVYCON ADVANCE, IP66, B10 protective cover for panel mounting side, with screw locking, with retaining cord, diameter of retaining cord eyelet: 3 mm

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

G-INS-M25-M68N-PNES-GY - Cable gland

1411126

<https://www.phoenixcontact.com/us/products/1411126>



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver-grey RAL 7001

G-INS-M25-M68N-NNES-S - Cable gland

1411165

<https://www.phoenixcontact.com/us/products/1411165>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

HC-M-KV-M25(14-21) - Cable gland

1646007

<https://www.phoenixcontact.com/us/products/1646007>



Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M25

G-INSEC-M25-S68N-NCRS-S - Cable gland

1411190

<https://www.phoenixcontact.com/us/products/1411190>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 11 mm ... 16 mm, shielding: yes, connecting thread: M25 x 1.5, color: silver, with O-ring

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing

1413390

<https://www.phoenixcontact.com/us/products/1413390>



HC-M-KV-M25(1ASI) - Cable gland

1584020

<https://www.phoenixcontact.com/us/products/1584020>



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M25

US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

US-EMLP-HA (20X9) CUS - Plastic label

0830995

<https://www.phoenixcontact.com/us/products/0830995>

Plastic label, Card, white, labeled, can be labeled with: THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70



WP-G HF IP66 M25 BK - Screw connection

3240899

<https://www.phoenixcontact.com/us/products/3240899>

Cable gland, metric thread, IP66 protection, straight



HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing

1413390

<https://www.phoenixcontact.com/us/products/1413390>



WP-G HF IP69K M25 BK - Screw connection

3240885

<https://www.phoenixcontact.com/us/products/3240885>

Cable gland, metric thread, IP68/69k protection, straight



WP-GA HF IP66 M25 BK - Screw connection

3240927

<https://www.phoenixcontact.com/us/products/3240927>

Cable gland, metric thread, IP66 protection, angled



HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing

1413390

<https://www.phoenixcontact.com/us/products/1413390>



WP-GA HF IP69K M25 BK - Screw connection

3240913

<https://www.phoenixcontact.com/us/products/3240913>

Cable gland, metric thread, IP68/69k protection, angled



WP-GR HF IP66 M25 BK - Screw connection

3240955

<https://www.phoenixcontact.com/us/products/3240955>

Cable gland, metric thread, IP66 protection, with strain relief



HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing

1413390

<https://www.phoenixcontact.com/us/products/1413390>



WP-GR HF IP69K M25 BK - Screw connection

3240941

<https://www.phoenixcontact.com/us/products/3240941>



Cable gland, metric thread, IP68/69k protection, with strain relief

WP-G PP HF M25 - Screw connection

3240999

<https://www.phoenixcontact.com/us/products/3240999>



Cable gland made from PP with metric thread, IP65 protection

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

WP-GT PP HF M25 - Screw connection

3241013

<https://www.phoenixcontact.com/us/products/3241013>



Cable gland made from PP with metric thread, rotatable, IP54 protection

WP-G BRASS IP40 M25 - Screw connection

3241048

<https://www.phoenixcontact.com/us/products/3241048>



Cable gland made from brass with metric thread, IP40 protection

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

WP-GT BRASS M25 - Screw connection

3241034

<https://www.phoenixcontact.com/us/products/3241034>



Cable gland made from brass with metric thread, rotatable, IP40 protection

WP-G BRASS IP65 M25 - Screw connection

3241062

<https://www.phoenixcontact.com/us/products/3241062>



Cable gland made from brass with metric thread, IP65 protection

HC-ADV-B10-HLWH-1TTM25-EMC-AL - Housing



1413390

<https://www.phoenixcontact.com/us/products/1413390>

SF-BIT-HEXB 5-89 - Screw insert

1208911

<https://www.phoenixcontact.com/us/products/1208911>



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173

SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/us/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com