

# QPD T 4PE1,5 3X9-14 BK - T distributor



1414754  
<https://www.phoenixcontact.com/in/products/1414754>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



T distributor, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, With three QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

## Your advantages

- Innovative and time saving - QUICKON fast connection for time saving of up to 80 % for on-site connection
- Robust throughout: housing with IP68/IP69K and IK07 protection for a wide range of applications
- Safer connection with mechanical coding to protect against mismatching, and touch-proof protection in accordance with DIN EN 0105
- Flexible and compact - by connecting connections internally, H and T-distributors can be used to branch master cables or they can be used as star distributors

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1414754             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF6                 |
| Product key                          | BF6DCA              |
| Catalog page                         | Page 473 (C-2-2019) |
| GTIN                                 | 4055626033631       |
| Weight per piece (including packing) | 169 g               |
| Weight per piece (excluding packing) | 162.6 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | PL                  |

# QPD T 4PE1,5 3X9-14 BK - T distributor



1414754

<https://www.phoenixcontact.com/in/products/1414754>

## Technical data

### Product properties

|                       |                   |
|-----------------------|-------------------|
| Product type          | Power distributor |
| Product family        | QPD               |
| Type                  | T distributor     |
| Number of positions   | 5                 |
| Connection profile    | 4+PE              |
| Position marking      | 1, 2, 3, N, PE    |
| Number of connections | 3                 |
| No. of cable outlets  | 3                 |
| Coding                | Coding profile    |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Connection data


#### Connection technology

|                                                                       |                |
|-----------------------------------------------------------------------|----------------|
| Connection method                                                     | IDC connection |
| Frequency of connections between conductors of the same cross section | max. 10        |

#### Conductor connection

|                                  |                     |
|----------------------------------|---------------------|
| Conductor cross section flexibel | 0.5 mm² ... 1.5 mm² |
|                                  | 0.5 mm² ... 1.5 mm² |
| Connection cross section AWG     | 20 ... 16           |
| Tightening torque Union nut      | 8 Nm                |
|                                  | 5 Nm                |

### Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 76 mm                                                                                |
| Height              | 31 mm                                                                                |
| Length              | 154.6 mm                                                                             |

### Electrical properties

|                             |      |
|-----------------------------|------|
| Rated surge voltage (II/2)  | 8 kV |
| Rated surge voltage (III/2) | 8 kV |

# QPD T 4PE1,5 3X9-14 BK - T distributor



1414754

<https://www.phoenixcontact.com/in/products/1414754>

|                             |          |
|-----------------------------|----------|
| Rated surge voltage (III/3) | 6 kV     |
| Rated current               | 17.5 A   |
| Contact resistance          | < 3 mΩ   |
| rated voltage (II/2)        | 1000 V   |
| rated voltage (III/2)       | 1000 V   |
| Rated voltage (III/3)       | 690 V    |
| Nominal voltage $U_N$       | 690 V AC |
|                             | 690 V DC |
| Nominal current $I_N$       | 17.5 A   |

## Mechanical properties

### Mechanical data

|                             |         |
|-----------------------------|---------|
| Insertion/withdrawal cycles | max. 50 |
|-----------------------------|---------|

## Material specifications

|                                        |                   |
|----------------------------------------|-------------------|
| Color                                  | black (RAL 9005)  |
| Material Housing                       | PA                |
|                                        | Cu                |
|                                        | Silver-plated     |
| Flammability rating according to UL 94 | V0                |
| Material wire insulation               | PVC/PE/TPE/rubber |

## Cable/line

|                                                                             |                                    |
|-----------------------------------------------------------------------------|------------------------------------|
| Structure of individual litz in acc. with VDE 0295 / smallest wire diameter | VDE 0295 class 1 to 6/min. 0.15 mm |
| External cable diameter                                                     | 10 mm ... 14 mm                    |
| Wire diameter including insulation                                          | 1.6 mm ... 3 mm                    |
| Position marking                                                            | 1, 2, 3, N, PE                     |
| Material wire insulation                                                    | PVC/PE/TPE/rubber                  |


## Environmental and real-life conditions

### Ambient conditions

|                                         |                   |
|-----------------------------------------|-------------------|
| Degree of protection                    | IP66              |
|                                         | IP68              |
|                                         | IP69K             |
| Ambient temperature (operation)         | -40 °C ... 100 °C |
| Temperature when conductor connected    | -5 °C ... 50 °C   |
| Ambient temperature (storage/transport) | -40 °C ... 100 °C |


## Drawings

Dimensional drawing

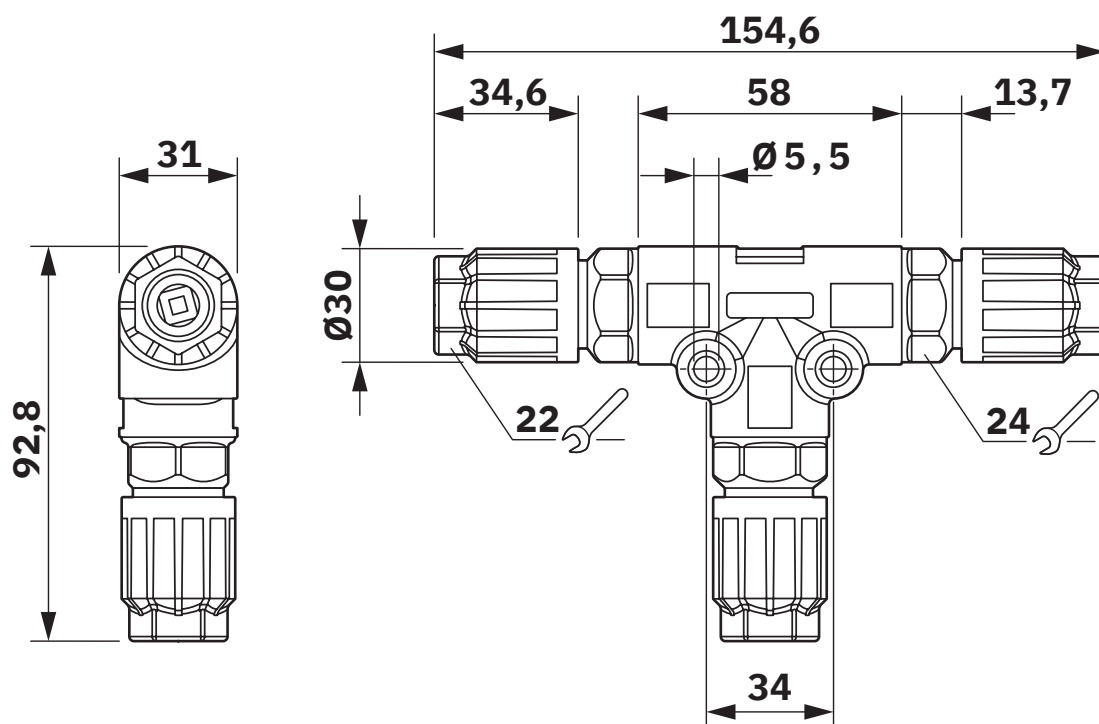

Dimensional drawing

Diagram

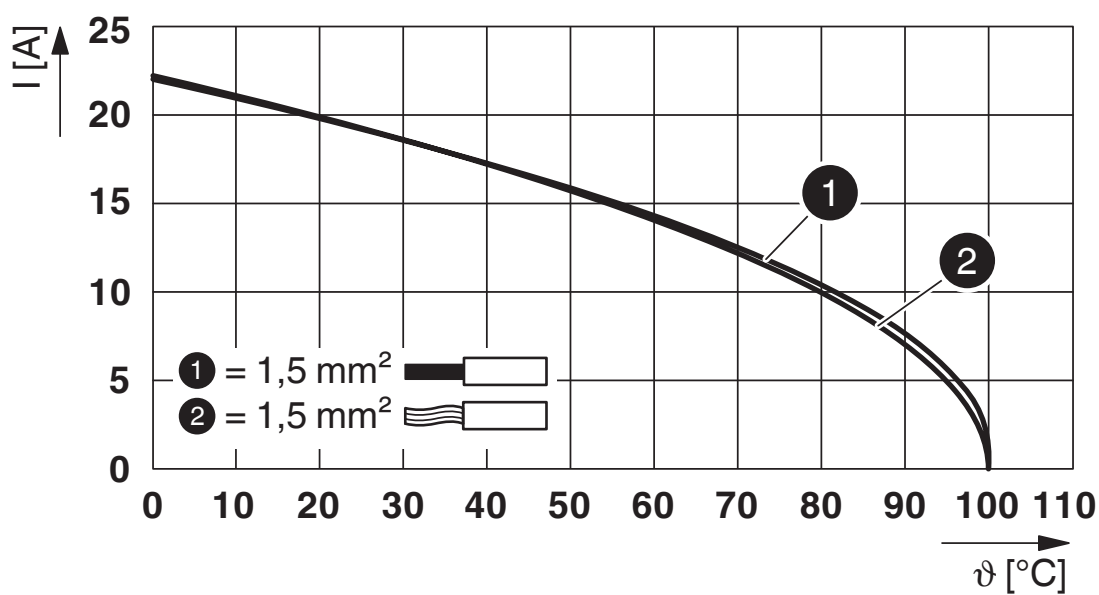

Derating diagram

# QPD T 4PE1,5 3X9-14 BK - T distributor



1414754

<https://www.phoenixcontact.com/in/products/1414754>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1414754>



**IECEE CB Scheme**  
Approval ID: DE1-65875



**EAC**  
Approval ID: RU C-DE.BL08.B.00511



**DNV GL**  
Approval ID: TAE00003J5



**VDE Zeichengenehmigung**  
Approval ID: 40029149

|                                                                                     |                                          |                       |                   |                             |
|-------------------------------------------------------------------------------------|------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>UL Listed</b><br>Approval ID: E468743 |                       |                   |                             |
|                                                                                     | Nominal voltage $U_N$                    | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group keine                                                                     |                                          |                       |                   |                             |
|                                                                                     | 600 V                                    | 8 A                   | -                 | - 16                        |

|                                                                                     |                                           |                       |                   |                             |
|-------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>cUL Listed</b><br>Approval ID: E468743 |                       |                   |                             |
|                                                                                     | Nominal voltage $U_N$                     | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group keine                                                                     |                                           |                       |                   |                             |
|                                                                                     | 600 V                                     | 8 A                   | - 16              | -                           |

**cULus Listed**

# QPD T 4PE1,5 3X9-14 BK - T distributor



1414754

<https://www.phoenixcontact.com/in/products/1414754>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440603 |
| ECLASS-12.0 | 27440603 |
| ECLASS-13.0 | 27440603 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002567 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# QPD T 4PE1,5 3X9-14 BK - T distributor



1414754

<https://www.phoenixcontact.com/in/products/1414754>

## Accessories

### CP-QPD 5X1,5 - Coding profile

1414760

<https://www.phoenixcontact.com/in/products/1414760>




Coding profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.

---

### GPE 13X 9 WH - Engraving material

0806932

<https://www.phoenixcontact.com/in/products/0806932>



Engraving material, Sheet, white, unlabeled, can be labeled with: PLOTMARK, ENGRAVING UNIT, CMS-P1-PLOTTER, P1 ENGRAVING UNIT, mounting type: adhesive, lettering field size: 13 x 9 mm, Number of individual labels: 120

## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



### EMLP (13X9)R - Label

0819453

<https://www.phoenixcontact.com/in/products/0819453>



Label, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: 13 x 9 mm, Number of individual labels: 500

---

### QPD QSK BK 5X1,5 FS - Protective cap

1414728

<https://www.phoenixcontact.com/in/products/1414728>

Protective cap, plastic, for QUICKON connection, black, with retaining cord, IP68



## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



## QPD QSK 5X1,5 - Protective cap

1414758

<https://www.phoenixcontact.com/in/products/1414758>

Protective cap plastic, for QPD-QUICKON connection 5x 1.5 mm<sup>2</sup>, IP50



---

## SEALING PLUG 10X16 RD - Closing cap

1400284

<https://www.phoenixcontact.com/in/products/1400284>

Closing cap, for threads pluggable, color: red



## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



## QPD W 4PE1,5 9-14 M25 0,5 BK - Panel feed-through

1414733

<https://www.phoenixcontact.com/in/products/1414733>



Panel feed-through, product family: QPD, connection method: Single wires/ IDC connection, number of positions: 4+PE, M25, Pin, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm, 1.5 mm<sup>2</sup>, cable length: 0.5 m

---

## QPD W 4PE1,5 9-14 M25 1,0 BK - Panel feed-through

1414734

<https://www.phoenixcontact.com/in/products/1414734>



Panel feed-through, product family: QPD, connection method: Single wires/ IDC connection, number of positions: 4+PE, M25, Pin, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm, 1.5 mm<sup>2</sup>, cable length: 1 m

## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



## QPD W 4PE1,5 9-14 M25 FC BK - Panel feed-through

1414735

<https://www.phoenixcontact.com/in/products/1414735>



Panel feed-through, product family: QPD, connection method: Spade connection (For slip-on sleeves according to DIN 46247-2)/ IDC connection, number of positions: 4+PE, M25, Pin, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm, 1.5 mm<sup>2</sup>

---

## QPD C 4PE1,5 1X9-14 BK - Conductor connector

1414741

<https://www.phoenixcontact.com/in/products/1414741>



Conductor connector, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with one QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



## QPD C 4PE1,5 2X9-14 BK - Conductor connector

1414742

<https://www.phoenixcontact.com/in/products/1414742>



Conductor connector, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, With two QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

---

## QPD T 4PE1,5 2X9-14 BK - T distributor

1414752

<https://www.phoenixcontact.com/in/products/1414752>



T distributor, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, With two QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



## QPD H 4PE1,5 4X9-14 BK - H distributor

1414756

<https://www.phoenixcontact.com/in/products/1414756>



H distributor, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with four QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 14 mm, with a sealing bolt

---

## QPD N 4PE1,5 9-14 BK - Nut

1415104

<https://www.phoenixcontact.com/in/products/1415104>



Nut, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, external cable diameter: 10 mm ... 14 mm

## QPD T 4PE1,5 3X9-14 BK - T distributor

1414754

<https://www.phoenixcontact.com/in/products/1414754>



## QPD P 4PE1,5 9-14 BK - Connector

1414750

<https://www.phoenixcontact.com/in/products/1414750>



Connector, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

---

## QSS 22 - Socket wrench

1670206

<https://www.phoenixcontact.com/in/products/1670206>



Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)