

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Power, 5-position, Socket, straight, M12-Standard, coding: L, on free cable end, Front mounting, M16 x 1.5, Individual wires, cable length: 0.2 m, 2.50 mm<sup>2</sup>, PEX litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239083

## Your advantages

- For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- Mechanical tightening limitation for long-term-stable gasket
- Preassembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

## Commercial data

Item number	1415296
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABQCFG
Catalog page	Page 286 (C-2-2019)
GTIN	4055626056258
Weight per piece (including packing)	48.7 g
Weight per piece (excluding packing)	48.7 g
Customs tariff number	85444290
Country of origin	DE

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Notes on operation	FE not connected to metal parts that can be touched, no protective function
General	Contact connection method: Crimp connection

### Mounting

Mounting type	Front mounting M16 x 1.5 XL version, tightening limitation
Assembly note	XL version, tightening limitation

### Product properties

Product type	Circular connectors (device side)
Sensor type	Power
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	L
Thread type	M12

### Data management status

Article revision	12
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires

### Electrical properties

Rated voltage in acc. with IEC 61076-2-101	63 V
Rated surge voltage	1.5 kV

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

	1.5 kV AC/DC
Nominal voltage $U_N$	63 V DC
Nominal current $I_N$	16 A
Test voltage	1.5 kV
Test voltage Core/Core	6 kV

## Connection data

### Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross section	2.5 mm <sup>2</sup>

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	Standard
Coding	L

### Connection 2

Head design	free cable end
-------------	----------------

## Cable/line

Cable length	0.2 m
Cable type	PEX litz wire
Signal type/category	Power
Single wire, color	brown 1, white 2, blue 3, black 4, pink FE
Cable cross section	2.5 mm <sup>2</sup>
Conductor material	Tin-plated Cu litz wires
AWG signal line	14
Material wire insulation	PE-X
Test voltage Core/Core	6 kV
Halogen-free	according to IEC 60754-1
Flame resistance	in acc. with UL FT-2
Other resistance	Hydrolysis-resistant
Ambient temperature (operation)	-40 °C ... 105 °C (cable, fixed installation) -25 °C ... 105 °C (Cable, flexible installation)

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 105 °C (Cable, flexible installation)
	-40 °C ... 105 °C (cable, fixed installation)

## Standards and regulations

Flame resistance	in acc. with UL FT-2
Other resistance	Hydrolysis-resistant

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111
Note	In line with


# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting

1415296

<https://www.phoenixcontact.com/pc/products/1415296>

## Drawings

Schematic diagram

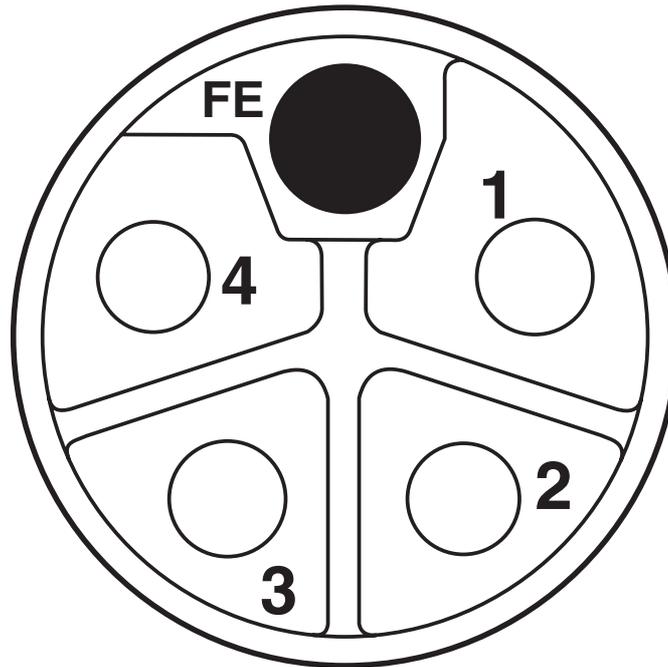

Pin assignment of M12 socket, 5-pos., L-coded, socket side view

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1415296>

 <b>cULus Recognized</b> Approval ID: E468743-20180113	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	16 A	14 - 14	-

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-E-M12FSL-4FE-M16XL/0,2 - Device connector front mounting



1415296

<https://www.phoenixcontact.com/pc/products/1415296>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	6dbb4d30-fc55-4249-be26-fd99dada2dde

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)