

SAC-5P- 5,0-U20/MINFS - Power cable



1416821

<https://www.phoenixcontact.com/us/products/1416821>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 5-position, PVC, yellow, free cable end, on Socket straight 7/8"-16UNF, coding: A, cable length: 5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1416821 |
| Packing unit | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF14 |
| Product key | BF1IMB |
| GTIN | 4055626223889 |
| Weight per piece (including packing) | 1,119 g |
| Weight per piece (excluding packing) | 1,119 g |
| Customs tariff number | 85444290 |
| Country of origin | MX |

SAC-5P- 5,0-U20/MINFS - Power cable



1416821

<https://www.phoenixcontact.com/us/products/1416821>

Technical data

Notes

Trade restriction

| | |
|---------|--|
| CE note | The products are offered exclusively for export outside the EU and the European Economic Area. |
|---------|--|

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Application | Standard |
| Number of positions | 5 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | A |

Material specifications

| | |
|--|-------------------|
| Flammability rating according to UL 94 | V0 |
| Material of grip body | PVC |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PVC |
| Material for screw connection | Anodized aluminum |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 600 V AC |
| | 600 V DC |
| Nominal current I_N | 8 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-----|
| Insertion/withdrawal cycles | 100 |
|-----------------------------|-----|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|-------------------------|
| Tightening torque | 10 lb _f -in. |
| | 1.12 Nm |

Connector

SAC-5P- 5,0-U20/MINFS - Power cable



1416821

<https://www.phoenixcontact.com/us/products/1416821>

Connection 1

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Connection 2

| | |
|---------------------|----------------------------|
| Type | Socket straight 7/8"-16UNF |
| Number of positions | 5 |
| Coding type | A |

Cable/line

| | |
|--------------|-----|
| Cable length | 5 m |
|--------------|-----|

Yellow, ST00W [U20]

| | |
|---|---|
| Number of positions | 5 |
| Shielded | no |
| Cable type | Yellow, ST00W [U20] |
| Conductor cross section | 5 x AWG 16 |
| External cable diameter | 12.70 mm |
| Outer sheath, material | PVC |
| External sheath, color | yellow |
| Conductor material | Bare Cu litz wires |
| Single wire, color | white 1, red 2, green 3, orange 4, black 5 |
| Nominal voltage, cable | 600 V |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 12.5 x D |
| Smallest bending radius, fixed installation | 51 mm |
| Smallest bending radius, movable installation | 159 mm |
| Flame resistance | UL 1581, FT2 |
| Resistance to oil | Premium oil resistance (jacket and conductor) |
| Other resistance | UV resistant (720 h) (UL 2556) |
| Ambient temperature (operation) | -40 °C ... 105 °C (cable, fixed installation) -30 °C ... 105 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP68 |
| Ambient temperature (operation) | -20 °C ... 105 °C (Plug / socket) -40 °C ... 105 °C (cable, fixed installation) -30 °C ... 105 °C (Cable, flexible installation) |

SAC-5P- 5,0-U20/MINFS - Power cable




1416821


<https://www.phoenixcontact.com/us/products/1416821>

Drawings

Circuit diagram

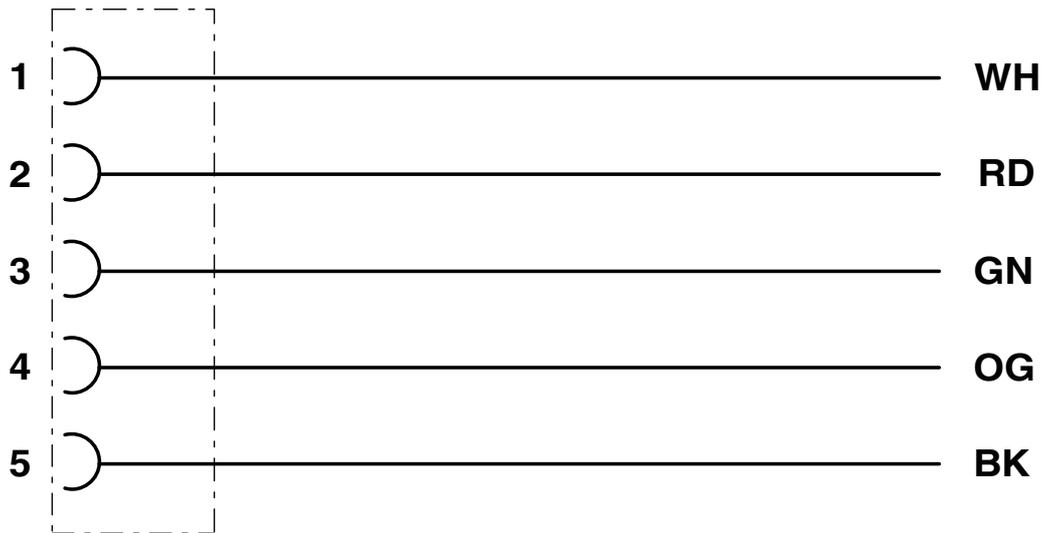


Dimensional drawing

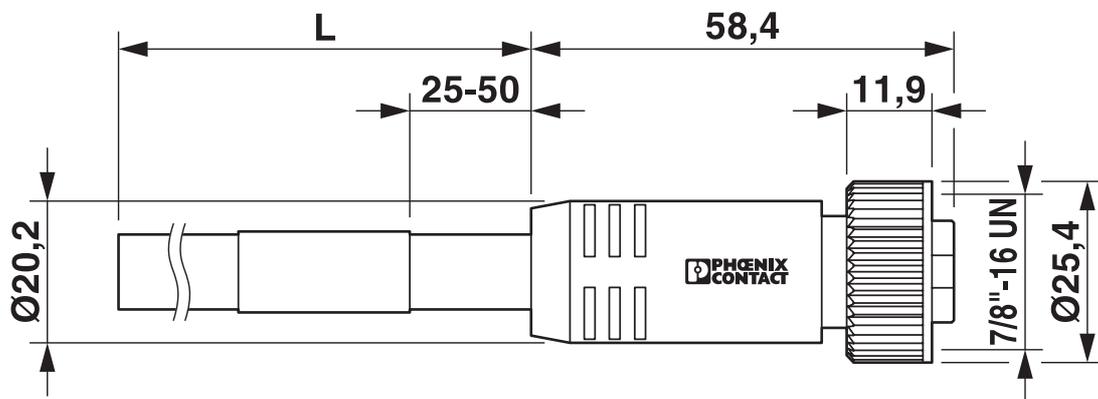

SAC-5P- 5,0-U20/MINFS - Power cable

1416821

<https://www.phoenixcontact.com/us/products/1416821>

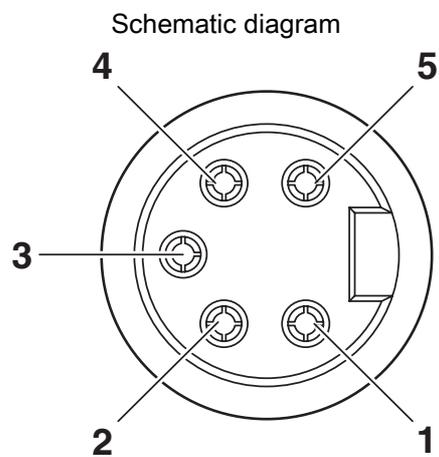

Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side

SAC-5P- 5,0-U20/MINFS - Power cable



1416821

<https://www.phoenixcontact.com/us/products/1416821>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1416821>



UL Listed

Approval ID: FILE E 221474



cUL Listed

Approval ID: FILE E 221474

cULus Listed

SAC-5P- 5,0-U20/MINFS - Power cable



1416821

<https://www.phoenixcontact.com/us/products/1416821>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251501 |
|-------------|----------|

SAC-5P- 5,0-U20/MINFS - Power cable



1416821

<https://www.phoenixcontact.com/us/products/1416821>

Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Not applicable, Not qualified for the European market |
|---|---|

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com