

HC-M-02-EMC-M - Contact insert module



1417374

<https://www.phoenixcontact.com/us/products/1417374>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 2, Pin, Crimp connection, 48 V, 10 A, 0.14 mm² ... 2.5 mm², application: Data/signal, for using two EMC connectors (pin), number of positions: 1, 4, 8

Commercial data

Item number	1417374
Packing unit	2 pc
Minimum order quantity	2 pc
Sales key	BF62
Product key	BF7ACE
Catalog page	Page 583 (C-2-2019)
GTIN	4055626112565
Weight per piece (including packing)	13.8 g
Weight per piece (excluding packing)	13.75 g
Customs tariff number	85389099
Country of origin	PL

HC-M-02-EMC-M - Contact insert module



1417374

<https://www.phoenixcontact.com/us/products/1417374>

Technical data

Notes

General	For HEAVYCON housing type B6 to B48, HC-M-B...MF-... hinged module carrier frame required.
General	Connectors may be operated only when there is no load/voltage.

Product properties

Product type	EMC insert, modular
Series	HC-M-EMV
Application	Data/signal
Number of positions	2
Connection profile	2
Contact numbering	1 - 2
Number of module slots	2
Number of slots	2
Contact material type	turned
	rolled
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated voltage (III/3)	48 V
Rated surge voltage	0.8 kV
Rated current	10 A

Connection data


Connection technology

Connection technology	Crimp connection
-----------------------	------------------

Conductor connection

Conductor cross section	0.14 mm² ... 2.5 mm²
-------------------------	----------------------

Dimensions

Dimensional drawing	
Width	34.2 mm
Height	34 mm

HC-M-02-EMC-M - Contact insert module



1417374

<https://www.phoenixcontact.com/us/products/1417374>

Length	29.4 mm
--------	---------

Mechanical characteristics

Minimum housing height	72 mm
Contact diameter	1.6 mm

Material specifications

Material Line conductor	Zinc alloy
Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (power)/Au (signal)
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
	Plastic module for the HC-M-EMV-ST/3-9.5 EMC connector

HC-M-02-EMC-M - Contact insert module




1417374

<https://www.phoenixcontact.com/us/products/1417374>

Drawings

Dimensional drawing

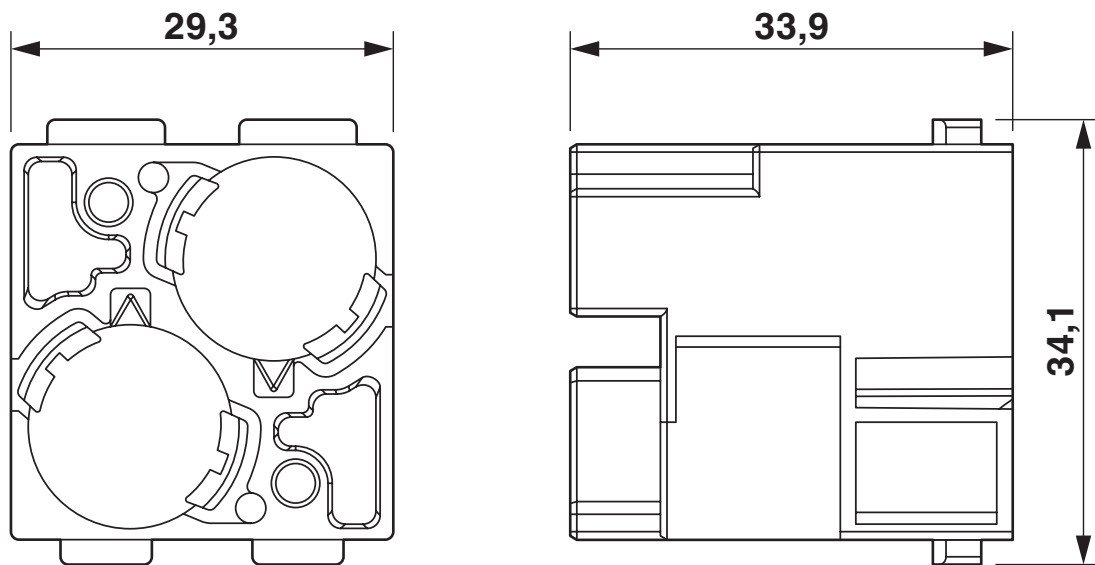

Male insert

HC-M-02-EMC-M - Contact insert module



1417374

<https://www.phoenixcontact.com/us/products/1417374>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1417374>



CSA

Approval ID: 13631



UL Recognized

Approval ID: E118976



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511

HC-M-02-EMC-M - Contact insert module



1417374

<https://www.phoenixcontact.com/us/products/1417374>

Classifications

ECLASS

ECLASS-11.0	27440218
ECLASS-12.0	27440218
ECLASS-13.0	27440218

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

HC-M-02-EMC-M - Contact insert module



1417374
<https://www.phoenixcontact.com/us/products/1417374>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com