

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 8-position, PVC, yellow, shielded (Tinned copper braided shield), free cable end, on Socket straight M12, coding: A, cable length: 15 m

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1418063                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BF13                           |
| Product key                          | BF1IDD                         |
| GTIN                                 | 4055626211718                  |
| Weight per piece (including packing) | 22.22 g                        |
| Weight per piece (excluding packing) | 22.22 g                        |
| Customs tariff number                | 85444290                       |
| Country of origin                    | US                             |

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard, U.S. cables |
| Number of positions  | 8                     |
| No. of cable outlets | 1                     |
| Shielded             | yes                   |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuZn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |
| Outer sheath, material                 | PVC                                         |

### Electrical properties

|                       |                           |
|-----------------------|---------------------------|
| Insulation resistance | $\geq 10 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 30 V AC                   |
|                       | 30 V DC                   |
| Nominal current $I_N$ | 2 A                       |

### Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

### Connector

#### Connection 1

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|

#### Connection 2

|      |                     |
|------|---------------------|
| Type | Socket straight M12 |
|------|---------------------|

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

|                     |   |
|---------------------|---|
| Number of positions | 8 |
| Coding type         | A |

## Cable/line

|              |      |
|--------------|------|
| Cable length | 15 m |
|--------------|------|

PVC yellow 105 °C [542]

|                                               |                                                                                                  |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------|
| Dimensional drawing                           |                |
| Cable weight                                  | 58 kg/km                                                                                         |
| UL AWM Style                                  | 2517 (105 °C / 300 V)                                                                            |
| Number of positions                           | 8                                                                                                |
| Shielded                                      | yes                                                                                              |
| Cable type                                    | PVC yellow 105 °C [542]                                                                          |
| Conductor structure signal line               | 32x 1.10 mm                                                                                      |
| AWG signal line                               | 24                                                                                               |
| Wire diameter incl. insulation                | 1.12 mm ±0.03 mm                                                                                 |
| External cable diameter                       | 6.30 mm ±0.2 mm                                                                                  |
| Outer sheath, material                        | PVC                                                                                              |
| External sheath, color                        | yellow                                                                                           |
| Conductor material                            | Tin-plated Cu litz wires                                                                         |
| Material, filler                              | PP                                                                                               |
| Material wire insulation                      | PVC                                                                                              |
| Single wire, color                            | white, brown, green, yellow, gray, pink, blue, red                                               |
| Overall twist                                 | 8 wires around filler to the core                                                                |
| Optical shield covering                       | 85 %                                                                                             |
| Max. conductor resistance                     | max. 79.7 Ω/km (20 °C)                                                                           |
| Insulation resistance                         | ≥ (550 M Ohms/m @ 500V)                                                                          |
| Nominal voltage, cable                        | 300 V                                                                                            |
| Minimum bending radius, flexible installation | 12 x D                                                                                           |
| Smallest bending radius, movable installation | 76 mm                                                                                            |
| Flame resistance                              | FT1, VW-1                                                                                        |
| Other resistance                              | UV resistant                                                                                     |
| Ambient temperature (operation)               | -30 °C ... 105 °C (cable, fixed installation)<br>-5 °C ... 105 °C (Cable, flexible installation) |

## Environmental and real-life conditions

Ambient conditions

SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063  
<https://www.phoenixcontact.com/us/products/1418063>

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable




1418063

<https://www.phoenixcontact.com/us/products/1418063>


## Drawings

Dimensional drawing

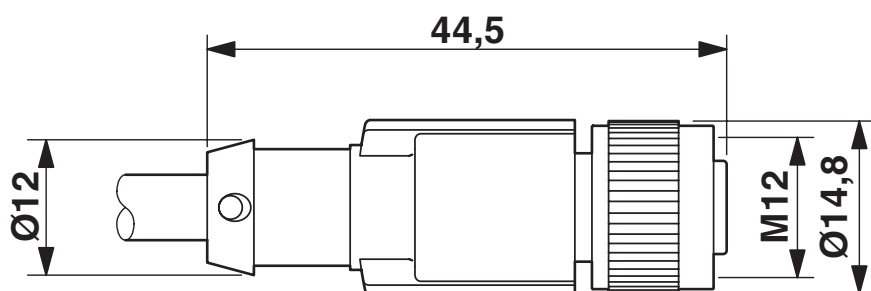

M12 x 1 socket, straight, shielded

Circuit diagram

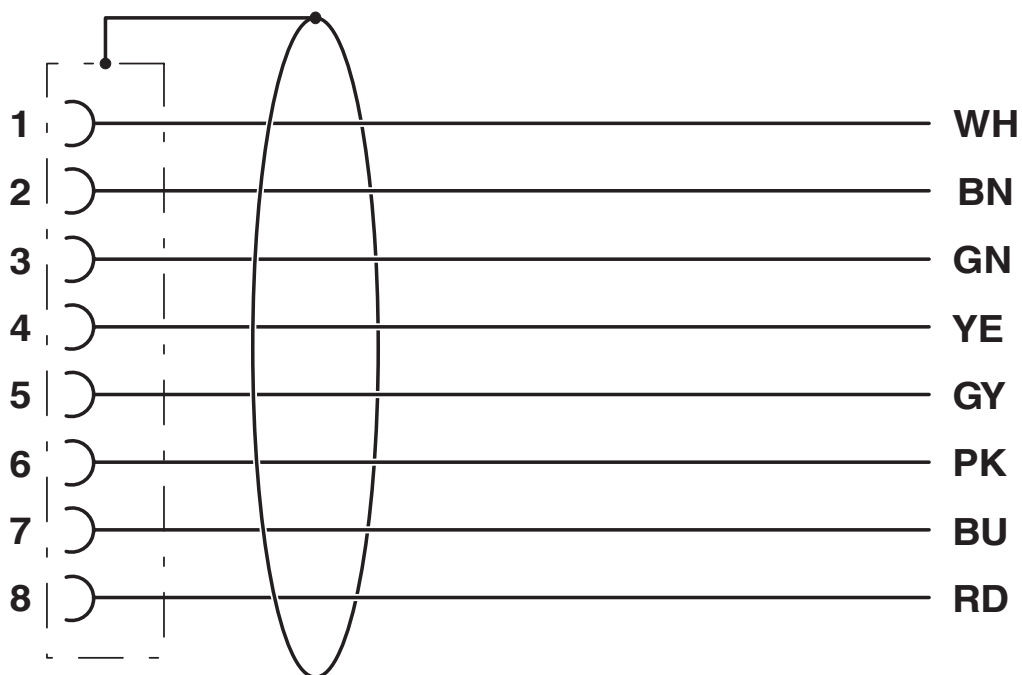


# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable

1418063

<https://www.phoenixcontact.com/us/products/1418063>

Schematic diagram

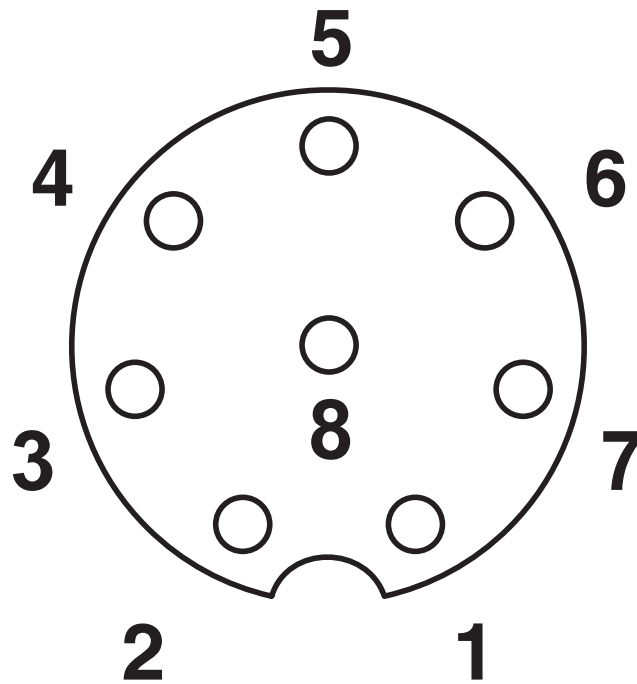

Pin assignment M12 socket, 8-pos., A-coded, view female side

1418063  
<https://www.phoenixcontact.com/us/products/1418063>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1418063>

|                                                                                                                                             |                                |                                |                   |                               |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
| <div><b>UL Listed</b><br/>Approval ID: FILE E 221474</div> |                                |                                |                   |                               |
|                                                                                                                                             | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|                                                                                                                                             | 30 V                           | 2 A                            | -                 | -                             |

|                                                                                                                                              |                                |                                |                   |                               |
|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
| <div><b>cUL Listed</b><br/>Approval ID: FILE E 221474</div> |                                |                                |                   |                               |
|                                                                                                                                              | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|                                                                                                                                              | 30 V                           | 2 A                            | -                 | -                             |

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| <b>cULus Listed</b> |  |  |  |  |
|---------------------|--|--|--|--|

1418063  
<https://www.phoenixcontact.com/us/products/1418063>

Classifications

ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31251501 |
|-------------|----------|

1418063  
<https://www.phoenixcontact.com/us/products/1418063>

Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                                                                                                                                                                                                                |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%                                                                                                                                                                                                        |

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## Accessories

### WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/us/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

---

### WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/us/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

## SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

### WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/us/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

---

### PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/us/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## SAC-M12-EXCLIP-F - Locking clip

1558991

<https://www.phoenixcontact.com/us/products/1558991>



Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

---

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/us/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

---

## WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/us/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/us/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

---

## WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/us/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

## TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

# SAC-8P- 15,0-542/ FS SH SCO BK - Sensor/actuator cable



1418063

<https://www.phoenixcontact.com/us/products/1418063>

## TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

## SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)