

HC-Q12-I-CT-M - Contact insert



1418626

<https://www.phoenixcontact.com/pc/products/1418626>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 12+PE, size: D7, number of connections per position: 1, Pin, Crimp connection, 400 V, 12 A, 0.14 mm² ... 2.5 mm²

Your advantages

- Can be keyed in seconds thanks to plastic profiles
- 16 coding options without loss of contact space
- Contact insert including IP65 sealing screw

Commercial data

Item number	1418626
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF7ABJ
Catalog page	Page 507 (C-2-2019)
GTIN	4055626249391
Weight per piece (including packing)	13.9 g
Weight per piece (excluding packing)	13.4 g
Customs tariff number	85389099
Country of origin	CN

HC-Q12-I-CT-M - Contact insert

1418626

<https://www.phoenixcontact.com/pc/products/1418626>



Technical data

Notes

General	For HC-D7 housing, crimp contacts CK1,6-ED (crimp contacts not included in scope of supply)
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
	Contact insert including IP67 sealing screw.


Product properties

Type	D7
Product type	Contact insert with a fixed no. of positions
Number of positions	12
Connection profile	12+PE
Contact numbering	1 - 12
Number of connections per position	1
Contact material type	turned
	rolled
Series	HC-Q

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	21 mm
Height	40.8 mm
Length	21 mm

Mechanical characteristics

Contact diameter	1.6 mm
------------------	--------

Connection data

Connection technology

Connection technology	Crimp connection
	PE connection

HC-Q12-I-CT-M - Contact insert



1418626

<https://www.phoenixcontact.com/pc/products/1418626>

Number of connections per position	1
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Tightening torque	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
Stripping length of the individual wire	8 mm
	6 mm (2.5 mm ²)

Electrical properties

Rated voltage (III/3)	400 V
Rated surge voltage	6 kV
Rated current	12 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR, conductive
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

HC-Q12-I-CT-M - Contact insert


1418626

<https://www.phoenixcontact.com/pc/products/1418626>




Drawings

Dimensional drawing

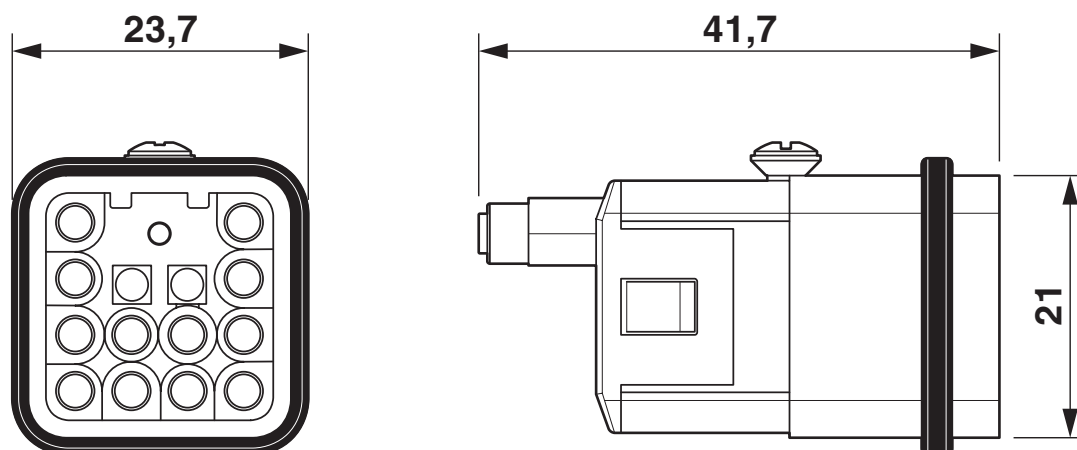

Dimensional drawing: HC-Q 12-I-CT-M

Diagram

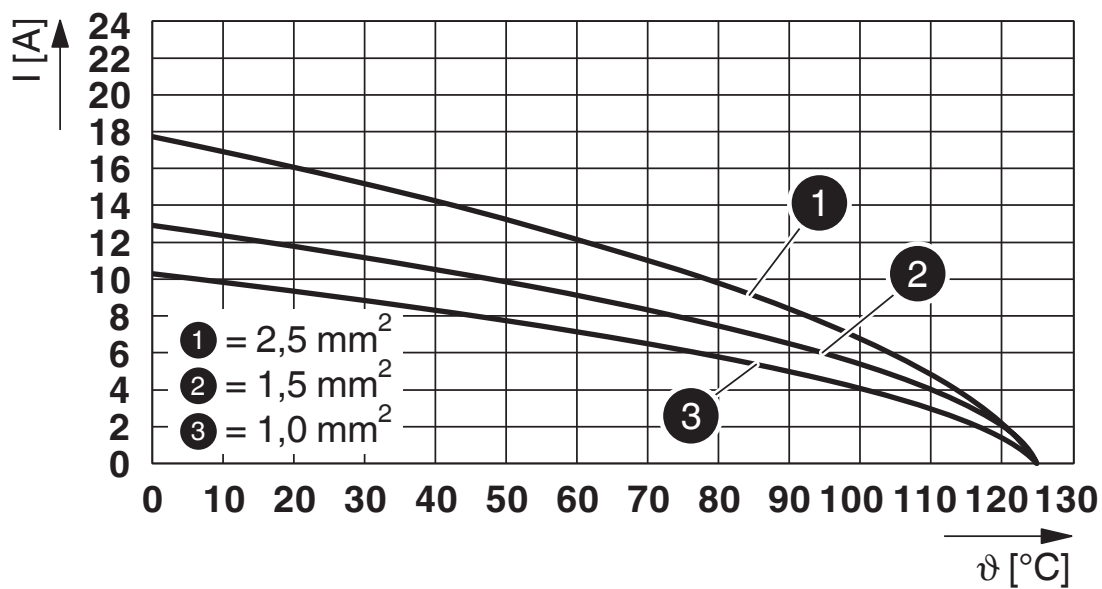

Derating diagram rolled contacts

1418626


<https://www.phoenixcontact.com/pc/products/1418626>

Schematic diagram

HC-Q 12-I-CT-M		HC-Q 12-I-CT-F	
A	B	B	A
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			


Coding scheme

Schematic diagram

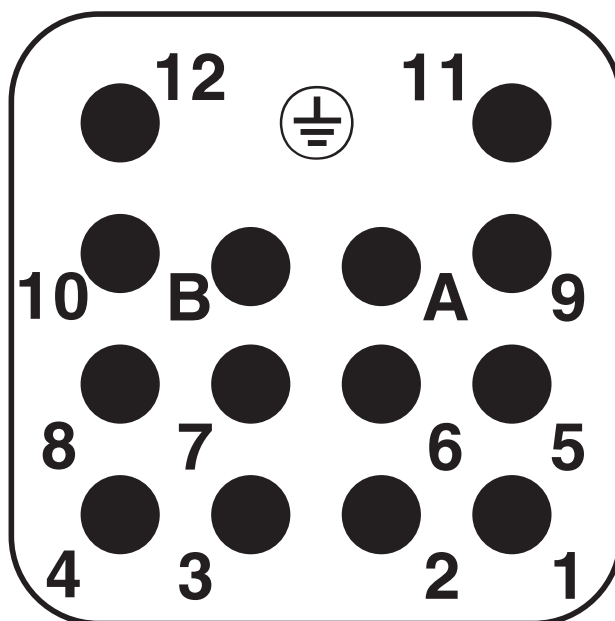

Pin assignment connection side. Position A and B for coding profiles

Diagram

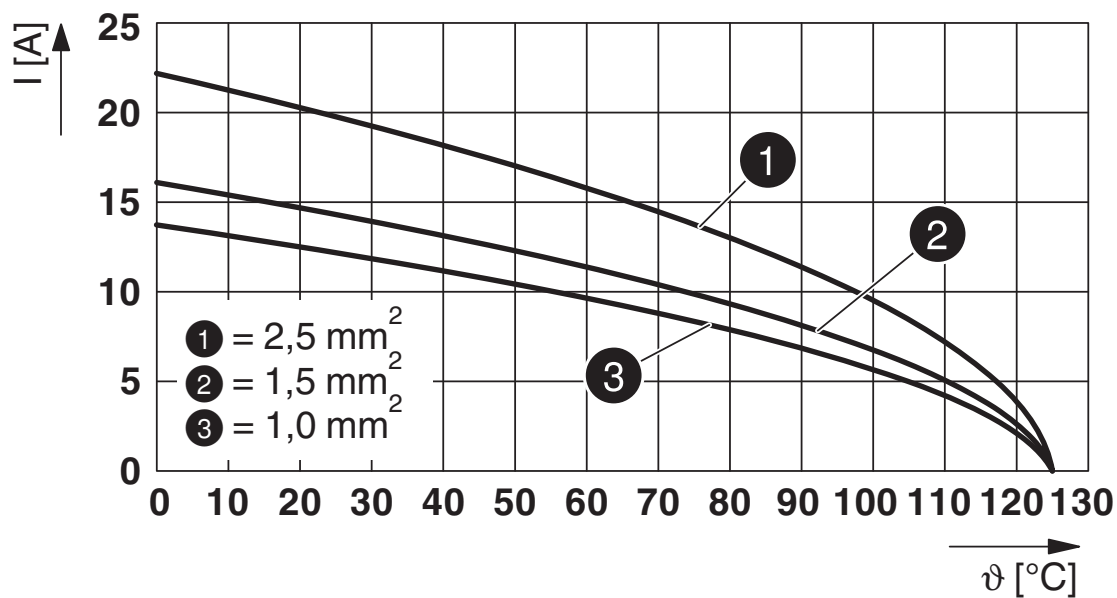

Derating diagram turned contacts

HC-Q12-I-CT-M - Contact insert



1418626

<https://www.phoenixcontact.com/pc/products/1418626>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1418626>

DNV

Approval ID: TAE000037S



CSA

Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	- 14	-



UL Recognized

Approval ID: E118976

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	15 A	- 14	-



EAC

Approval ID: RU C-DE.BL08.B.00511



UL Recognized

Approval ID: E468743

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	15 A	-	-

HC-Q12-I-CT-M - Contact insert



1418626

<https://www.phoenixcontact.com/pc/products/1418626>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-Q12-I-CT-M - Contact insert



1418626

<https://www.phoenixcontact.com/pc/products/1418626>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com