

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, PROFINET CAT5 (100 Mbps) CAT5 (100 Mbps), 4-position, PVC halogen-free, green RAL 6018, shielded, Socket, straight, M12-SPEEDCON, coding: D, on free cable end, Rear mounting, M16 x 1.5, Cable connection, cable length: 1 m, PROFINET, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239226

Your advantages

- Preassembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- Cable designs for all common networks and fieldbuses
- For high transmission safety: shield connection to the housing with optional EMC nut
- Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1%) available

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1419135 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | ABQDGI |
| Catalog page | Page 385 (C-4-2015) |
| GTIN | 4046356540582 |
| Weight per piece (including packing) | 97.5 g |
| Weight per piece (excluding packing) | 97.5 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Technical data

Notes

| | |
|-------------|---|
| General | Contact connection method: Crimp connection |
| Safety note | |
| Safety note | <p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.• The products are suitable for applications in plant, controller, and electrical device engineering.• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.• Assembled products may not be manipulated or improperly opened.• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).• When using the product in direct connection with third-party manufacturers, the user is responsible.• For operating voltages > 50 V AC, conductive connector housings must be grounded• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none">o On the producto On the packing labelo In the supplied documentationo Online at phoenixcontact.com/products under the product• Only use tools recommended by Phoenix Contact• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products• Ensure that the protective or functional ground has been properly connected.• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to |

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

| | |
|----------------------|-------------------------|
| Product type | Data cable preassembled |
| Sensor type | PROFINET |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | D |
| Thread type | M12 |

Data management status

| | |
|------------------|----|
| Article revision | 11 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Interfaces

| | |
|----------------------|--|
| Bus system | PROFINET |
| Signal type/category | PROFINET CAT5 (IEC 11801:2002), 100 Mbps |

Electrical properties

| | |
|---|--|
| Rated surge voltage | 2.5 kV |
| Contact resistance | $\leq 3 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 250 V |
| Nominal current I_N | 4 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed) |
| Transmission medium | Copper |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002) |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Material specifications

| | |
|--|----------------------|
| Flammability rating according to UL 94 | V0 |
| Seal material | FKM |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 |
| Material for screw connection | Brass, nickel-plated |
| Outer sheath, material | PVC |

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Connection data

Connection technology

| | |
|-------------------|------------------|
| Connection method | Cable connection |
|-------------------|------------------|

Conductor connection

| | |
|-------------------------|-----------------------------------|
| Contact connection type | Socket |
| Connection method | Cable connection |
| Tightening torque | 2 Nm ... 3 Nm (Installation-side) |

Connector

Connection 1

| | |
|-------------------|----------|
| Head design | Socket |
| Head cable outlet | straight |
| Head thread type | M12 |
| Head locking type | SPEEDCON |
| Coding | D |


Connection 2

| | |
|-------------|----------------|
| Head design | free cable end |
|-------------|----------------|

Cable/line

| | |
|--------------|-----|
| Cable length | 1 m |
|--------------|-----|

PROFINET PVC stranded CAT5 [93B]

| | |
|---------------------------------|--|
| Dimensional drawing |  |
| Cable weight | 67 kg/km |
| UL AWM Style | 21694 |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PROFINET PVC stranded CAT5 [93B] |
| Conductor structure | 1x4xAWG22/7, SF/TQ |
| Signal runtime | 5.3 ns/m |
| Signal speed | 0.66 c |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Conductor cross section | 4x 0.34 mm² |
| Wire diameter incl. insulation | 1.55 mm |

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

| | |
|---|---|
| External cable diameter | 6.50 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | green RAL 6018 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PE |
| Single wire, color | white, yellow, blue, orange |
| Thickness, outer sheath | approx. 0.90 mm |
| Overall twist | Star quad |
| Optical shield covering | 85 % |
| Insulation resistance | ≥ 500 MΩ*km |
| Coupling resistance | ≤ 20.00 mΩ/m (at 10 MHz) |
| Loop resistance | ≤ 120.00 Ω/km |
| Wave impedance | 100 Ω ±15 Ω (at 100 MHz) |
| Nominal voltage, cable | 600 V |
| Test voltage Core/Core | 2000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 2000.00 V (50 Hz, 1 min.) |
| Minimum bending radius, fixed installation | 3 x D |
| Minimum bending radius, flexible installation | 7 x D |
| Smallest bending radius, fixed installation | 20 mm |
| Smallest bending radius, movable installation | 46 mm |
| Near end crosstalk attenuation (NEXT) | 80 dB (with 1 MHz) |
| | 76 dB (at 4 MHz) |
| | 70 dB (at 10 MHz) |
| | 65 dB (at 16 MHz) |
| | 63 dB (at 20 MHz) |
| | 60 dB (at 31.25 MHz) |
| | 55 dB (at 62.5 MHz) |
| | 50 dB (at 100 MHz) |
| Shield attenuation | 2.1 dB (with 1 MHz) |
| | 4 dB (at 4 MHz) |
| | 6.3 dB (at 10 MHz) |
| | 8 dB (at 16 MHz) |
| | 9 dB (at 20 MHz) |
| | 11.4 dB (at 31.25 MHz) |
| | 16.5 dB (at 62.5 MHz) |
| | 21.3 dB (at 100 MHz) |
| Flame resistance | according to UL 1685 (CSA FT 4) |
| Resistance to oil | Resistant to oil to a limited extent |
| Other resistance | UV resistant (according to UL 1581, Section 1200) |
| Ambient temperature (operation) | -40 °C ... 70 °C (cable, fixed installation) |
| | -40 °C ... 70 °C (Cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 60 °C |

Environmental and real-life conditions

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Ambient conditions

| | |
|---------------------------------|---|
| Degree of protection | IP65/IP67 |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| | -40 °C ... 85 °C (without mechanical actuation) |

Standards and regulations

M12

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting




1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Drawings

Diagram

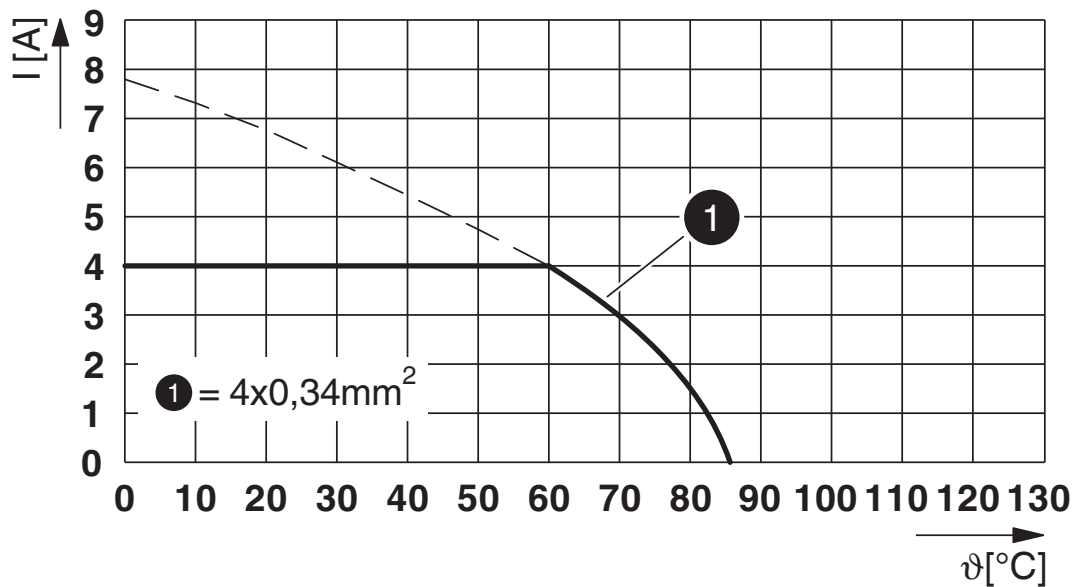

I = current strength, T = ambient temperature

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1419135>



EAC

Approval ID: 19060508

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

VS-FSDBPS-OE-93G-LI/1,0 - Device connector rear mounting



1419135

<https://www.phoenixcontact.com/pc/products/1419135>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 28165d8c-77c9-4b2b-bb9f-912e494201df |

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com