


VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166
<https://www.phoenixcontact.com/pc/products/1419166>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Assembled Sercos III cable, shielded, star quad, AWG 22 stranded (7-wire), RAL 3020 (traffic red), RJ45 connector/IP20, on RJ45 connector/IP20, length: 2 m

Commercial data

Item number	1419166
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABNABA
Catalog page	Page 316 (PC-2011)
GTIN	4046356541114
Weight per piece (including packing)	160 g
Weight per piece (excluding packing)	137.065 g
Customs tariff number	85444210
Country of origin	PL

VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166

<https://www.phoenixcontact.com/pc/products/1419166>

Technical data

Product properties

Product type	Data cable preassembled
Application	Standard
Sensor type	Sercos
Number of positions	4
No. of cable outlets	1
Shielded	yes
Cable outlet	straight

Data management status

Article revision	04
------------------	----

Insulation characteristics

Overvoltage category	I
Degree of pollution	1

Signaling

Status display	no
----------------	----

Electrical properties

Transmission medium	Copper
Transmission characteristics (category)	CAT5
Transmission speed	100 Mbps

Mechanical properties

Mechanical data

Insertion force per signal contact	50.00 N
Extraction force per signal contact	30 N

Material specifications

Flammability rating according to UL 94	V0
Outer sheath, material	PVC
Conductor material	Tin-plated Cu litz wires

Connector

Connection 1

Type	Plug straight RJ45
Shielded	yes
Handle color	black
Insertion/withdrawal cycles	≥ 750
Degree of protection	IP20

VS-IP20-IP20-93K-LI/2,0 - Patch cable

1419166

<https://www.phoenixcontact.com/pc/products/1419166>

Connection 2

Type	Plug straight RJ45
Shielded	yes
Insertion/withdrawal cycles	≥ 750
Degree of protection	IP20

Cable/line

Cable length	2.00 m
--------------	--------

Sercos III [93K]

Dimensional drawing	
Shielded	yes
UL AWM Style	21694 (60 °C / 600 V)
Cable weight	68 kg/km
Cable type	Sercos III
Cable type (abbreviation)	93K
Signal type/category	Sercos CAT5 (IEC 11801), 100 Mbps
Cable structure	1x4xAWG22/7, SF/TQ
External cable diameter	6.50 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	signal red RAL 3020
Thickness, outer sheath	approx. 0.90 mm
Material, inner sheath	PVC
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm ²
Material wire insulation	PE
Wire diameter incl. insulation	approx. 1.55 mm
Single wire, color	white, yellow, blue, orange
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	Star quad
Shielding	Tinned copper braided shield
Nominal voltage, cable	600 V
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000.00 V (50 Hz, 1 min.)
Cable resistance	≤ 120 Ω/km

VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166

<https://www.phoenixcontact.com/pc/products/1419166>

Cable insulation resistance	$\geq 0.5 \text{ G}\Omega \cdot \text{km}$
Coupling resistance	$\leq 20.00 \text{ m}\Omega/\text{m}$ (at 10 Hz)
Wave impedance	$100 \text{ }\Omega \pm 15 \text{ }\Omega$ (at 100 MHz)
Signal runtime	5.3 ns/m
Minimum bending radius, fixed installation	3 x D
Minimum bending radius, flexible installation	7 x D
Resistance to oil	Resistant to oil to a limited extent
Flame resistance	according to UL 1685 (CSA FT 4)
Other resistance	UV resistant (according to UL 1581, Section 1200)
Ambient temperature (operation)	-40 °C ... 70 °C (Cable, flexible installation)
	-40 °C ... 70 °C (cable, fixed installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-10 °C ... 60 °C (cable, fixed installation)
	-5 °C ... 50 °C (Cable, flexible installation)


VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166
<https://www.phoenixcontact.com/pc/products/1419166>


Drawings

Dimensional drawing

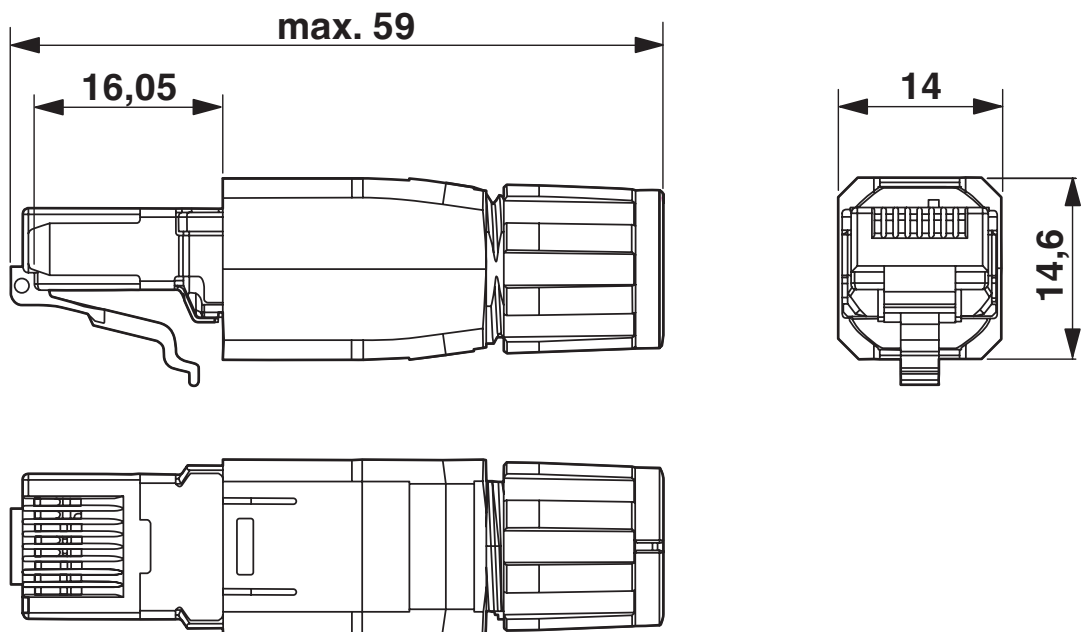

RJ45 connector, IP20

Circuit diagram

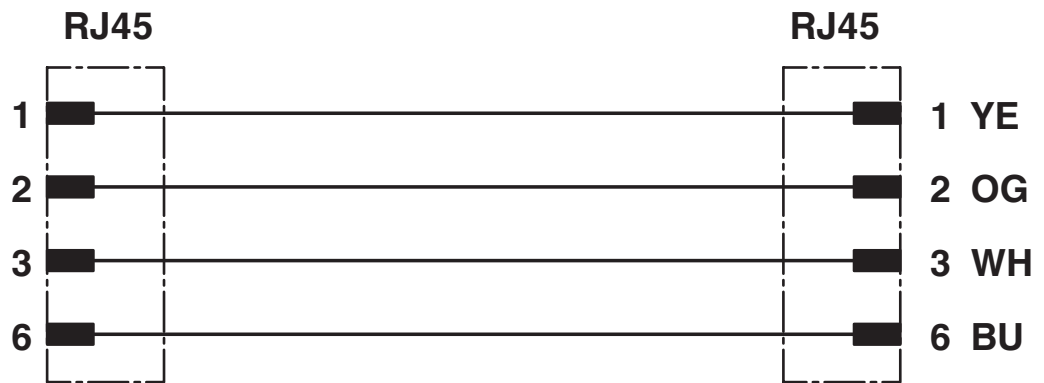

VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166

<https://www.phoenixcontact.com/pc/products/1419166>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1419166>



EAC

Approval ID: 19060508

VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166

<https://www.phoenixcontact.com/pc/products/1419166>

Classifications

ECLASS

ECLASS-11.0	27060308
ECLASS-12.0	27060308
ECLASS-13.0	27060307

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

VS-IP20-IP20-93K-LI/2,0 - Patch cable



1419166
<https://www.phoenixcontact.com/pc/products/1419166>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol (UV-329)(CAS: 3147-75-9)

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com