

1419755

https://www.phoenixcontact.com/us/products/1419755

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, Socket, M12, coding: A, Rear mounting, M16 \times 1.5, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0. 1 %) item no.: 1239286

Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · SPEEDCON fast locking system reduces cabling times

Commercial data

Item number	1419755
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB26
Product key	ABQEHJ
Catalog page	Page 250 (C-2-2013)
GTIN	4046356533959
Weight per piece (including packing)	14.56 g
Weight per piece (excluding packing)	14.291 g
Customs tariff number	85366990
Country of origin	DE



1419755

https://www.phoenixcontact.com/us/products/1419755

Technical data

Notes

General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Lock nut is included in the scope of delivery

Mounting

Mounting type	Rear mounting M16 x 1.5 With flat nut
Assembly instructions	With flat nut

Product properties

Product type	Circular connectors (device side)
Number of positions	4
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	
insulation characteristics	
Overvoltage category	

Dimensions

Length of the solder pin	6 mm
	6 mm

3

Material specifications

Degree of pollution

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	250 V
Nominal current I _N	4 A



1419755

https://www.phoenixcontact.com/us/products/1419755

Connection data

Conductor connection

Connection method	Wave soldering
Contact connection type	Socket
Tightening torque	3 Nm 4 Nm (Installation-side)

Mechanical properties

Mechanical data

	Insertion/withdrawal cycles	> 100

Connector

Connection 1

Head design	Socket
Head thread type	M12
Coding	A

Cable/line

Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101




1419755

https://www.phoenixcontact.com/us/products/1419755

Drawings

Schematic diagram

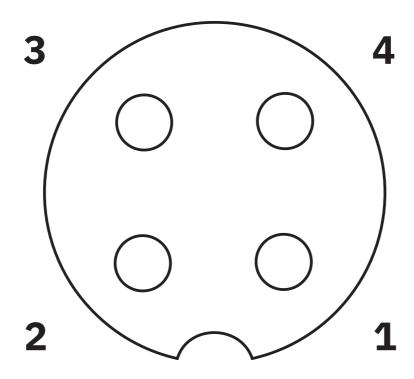

Pin assignment M12 socket, 4-pos., A-coded, view female side



1419755

https://www.phoenixcontact.com/us/products/1419755

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1419755

. 91	cUL Recognized Approval ID: E118976-20100522				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	22 - 22	-

e 911 us	cULus Recognized Approval ID: E221474-20140616				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	22 - 20	-

UL Recognized Approval ID: E118976-20100522				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	250 V	4 A	22 - 22	-

cULus Recognized



1419755

https://www.phoenixcontact.com/us/products/1419755

Classifications

ECLASS

	ECLASS-11.0	27440102		
	ECLASS-12.0	27440116		
	ECLASS-13.0	27440116		
ETIM				
	ETIM 9.0	EC002635		
UNSPSC				
	UNSPSC 21.0	39121400		



1419755

https://www.phoenixcontact.com/us/products/1419755

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"



1419755

https://www.phoenixcontact.com/us/products/1419755

Accessories

SACC-M16-SEAL CLM - Flat gasket

1430394

https://www.phoenixcontact.com/us/products/1430394

M16 flat gasket for M12 flush-type connectors with M16 fastening thread



PROT-M12 - Screw plug

1680539

https://www.phoenixcontact.com/us/products/1680539



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors



1419755

https://www.phoenixcontact.com/us/products/1419755

PROT-M12 SH - Screw plug

1503302

https://www.phoenixcontact.com/us/products/1503302



An M12 screw plug for the unoccupied M12 sockets of the shielded sensor/actuator cable, boxes and flush-type connectors

PROT-M12 FB - Screw plug

1555538

https://www.phoenixcontact.com/us/products/1555538



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com