

HC-Q02-I-CT-M - Contact insert

1419893

<https://www.phoenixcontact.com/pc/products/1419893>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 2+PE, size: D7, number of connections per position: 1, Pin, Crimp connection, 400 V, 40 A, 1.5 mm² ... 6 mm², application: Power

Commercial data

Item number	1419893
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF7ABJ
Catalog page	Page 511 (C-2-2019)
GTIN	4055626256139
Weight per piece (including packing)	14.3 g
Weight per piece (excluding packing)	14.1 g
Customs tariff number	85389099
Country of origin	CN

HC-Q02-I-CT-M - Contact insert

1419893

<https://www.phoenixcontact.com/pc/products/1419893>



Technical data

Notes

General	For HC-D7 housing, crimp contacts CK 4,0. Crimp contacts not included in scope of supply.
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
-----------------------	---


Product properties

Type	D7
Product type	Contact insert with a fixed no. of positions
Number of positions	2
Connection profile	2+PE
Contact numbering	1 - 2
Application	Power
Number of connections per position	1
Contact material type	turned
Series	HC-HS

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	21 mm
Height	40 mm
Length	21 mm

Mechanical characteristics

Contact diameter	4 mm
------------------	------

Connection data

Connection technology

Connection technology	Crimp connection
	Crimp connection (PE contact)
Number of connections per position	1

HC-Q02-I-CT-M - Contact insert

1419893

<https://www.phoenixcontact.com/pc/products/1419893>



Connection in acc. with standard	IEC / EN
----------------------------------	----------

Conductor connection

Conductor cross section	1.5 mm ² ... 6 mm ²
Connection cross section AWG	16 ... 10
Tightening torque	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
Stripping length of the individual wire	9 mm (1.5 ... 6.0 mm ²)
	11 mm (for 10 mm ²)

Electrical properties

Rated voltage (III/3)	400 V
Rated surge voltage	6 kV
Rated current	40 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR, conductive
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-Q02-I-CT-M - Contact insert



1419893

<https://www.phoenixcontact.com/pc/products/1419893>

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

HC-Q02-I-CT-M - Contact insert


1419893

<https://www.phoenixcontact.com/pc/products/1419893>




Drawings

Schematic diagram

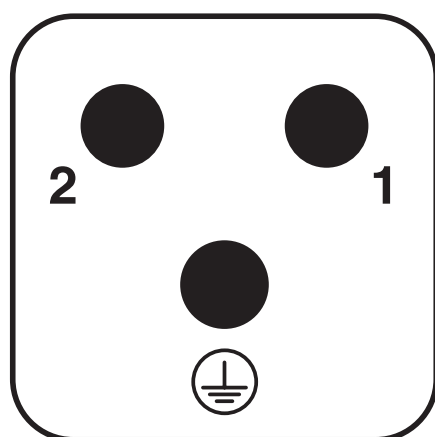

Diagram

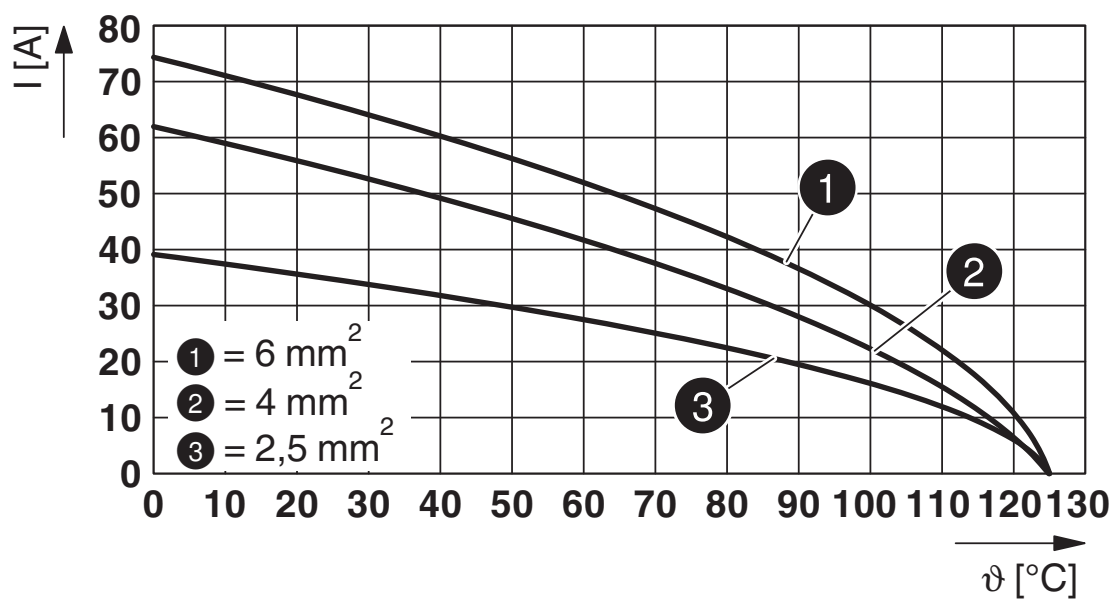

Derating diagram


HC-Q02-I-CT-M - Contact insert

1419893

<https://www.phoenixcontact.com/pc/products/1419893>



Dimensional drawing

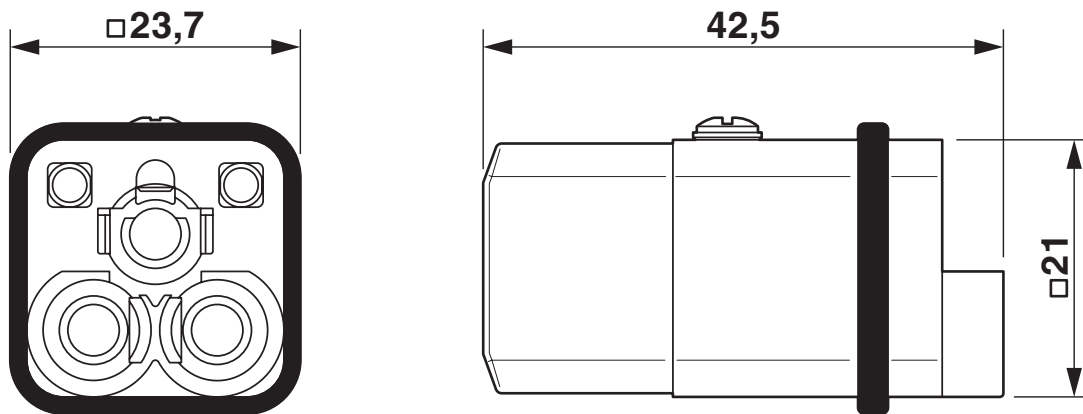

Male insert

HC-Q02-I-CT-M - Contact insert

1419893

<https://www.phoenixcontact.com/pc/products/1419893>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1419893>

	UL Recognized Approval ID: E118976			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	50 A	- 8	-

	EAC Approval ID: RU C-DE.BL08.B.00511
---	---

	UL Recognized Approval ID: E468743			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	45 A	-	-

HC-Q02-I-CT-M - Contact insert



1419893

<https://www.phoenixcontact.com/pc/products/1419893>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-Q02-I-CT-M - Contact insert



1419893

<https://www.phoenixcontact.com/pc/products/1419893>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com