

1420954

https://www.phoenixcontact.com/us/products/1420954

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Flush-type connector, 4-position, Socket, straight, 7/8"-16UNF, on free cable end, Front mounting, with 1/2 inch-14 NPT mounting thread, Individual wires, cable length: 1 m, 1.50 mm², PVC litz wire

Commercial data

Item number	1420954
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF14
Product key	BF2ICA
GTIN	4055626341477
Weight per piece (including packing)	114.9 g
Weight per piece (excluding packing)	114.9 g
Customs tariff number	85444290
Country of origin	MX



1420954

https://www.phoenixcontact.com/us/products/1420954

Technical data

Notes

Trada	ractri	ction

CE note	The products are offered exclusively for export outside the EU
	and the European Economic Area.

Mounting

Mounting type	Front mounting, with 1/2 inch-14 NPT mounting thread

Product properties

Product type	Circular connectors (device side)
Number of positions	4
No. of cable outlets	1
Shielded	no
Data management status	
Article revision	03

Insulation characteristics

Degree of pollution 3	,
-----------------------	---

Material specifications

Flammability rating according to UL 94	V-0
Housing surface material	Al anodized
Contact material	Copper alloy
Contact surface material	Au
Contact carrier material	PVC
Material for screw connection	Anodized aluminum

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	600 V AC
	600 V DC
Nominal current I _N	10 A

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross section	1.5 mm²
Tightening torque	10 lb _F in.
	1.12 Nm



1420954

https://www.phoenixcontact.com/us/products/1420954

Mechanical properties

а

Insertion/withdrawal cycles	> 500

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	7/8"-16UNF

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	1 m
Cable type	PVC litz wire
Wire diameter incl. insulation	2.6 mm
Single wire, color	black 1, white 2, red 3, green 4
Cable cross section	1.5 mm²
Conductor structure signal line	26 x AWG 30
AWG signal line	16
Material wire insulation	PVC
Thickness, insulation	Core insulation

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP68
	IP68
Ambient temperature (operation)	-20 °C 80 °C (Plug)
	-20 °C 80 °C (cable, fixed installation)

Standards and regulations

Standard designation	7/8" connector
Standards/specifications	UL 2238
Note	Suitable for use in Class I, Division 2 Groups A, B, C, D hazardous locations according to ISA standard 12.12.01-2015, section 8.2 and 8.8.3




1420954

https://www.phoenixcontact.com/us/products/1420954


Drawings

Dimensional drawing



Housing cutout


Circuit diagram

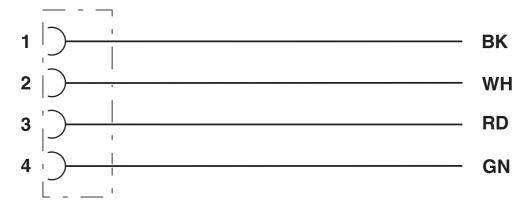




1420954

https://www.phoenixcontact.com/us/products/1420954



Pin assignment, socket, 7/8"-16UNF, 4-pos., view of female side (reference image)

Dimensional drawing

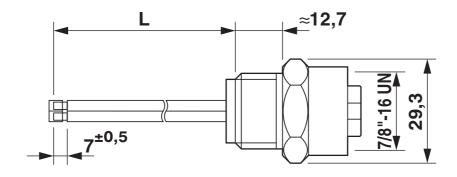

7/8" flush-type socket



1420954

https://www.phoenixcontact.com/us/products/1420954

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1420954



UL Listed

Approval ID: FILE E 221474



cUL Listed

Approval ID: FILE E 221474

cULus Listed



1420954

https://www.phoenixcontact.com/us/products/1420954

Classifications

UNSPSC 21.0

ECLASS

EC	CLASS-11.0	27440109
EC	CLASS-12.0	27440109
EC	CLASS-13.0	27440109
ETIM		
ET	TIM 8.0	EC003569
UNSP	PSC	

39121413



1420954

https://www.phoenixcontact.com/us/products/1420954

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
EU REACH SVHC	

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com