

# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, black RAL 9005, shielded (Advanced Shielding Technology), Plug angled M12, coding: T, on free cable end, cable length: 10 m, For direct current up to 12 A/63 V

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special T-coding
- Shield power reliably – 360° shielding to reduce electromagnetic loads
- Our standard: robust halogen-free PUR cable

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1424127                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Product key                          | BF1CCQ                         |
| Catalog page                         | Page 290 (C-2-2019)            |
| GTIN                                 | 4046356693318                  |
| Weight per piece (including packing) | 1,467.6 g                      |
| Weight per piece (excluding packing) | 1,467.6 g                      |
| Customs tariff number                | 85444290                       |
| Country of origin                    | PL                             |

# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

## Technical data

### Product properties

|                      |              |
|----------------------|--------------|
| Product type         | Power cable  |
| Application          | Power supply |
| Number of positions  | 4            |
| No. of cable outlets | 1            |
| Shielded             | yes          |
| Coding               | T            |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 05 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Material specifications

|                                        |                              |
|----------------------------------------|------------------------------|
| Flammability rating according to UL 94 | V0                           |
| Material of grip body                  | PP                           |
| Contact material                       | CuZn                         |
| Contact surface material               | Ni/Au                        |
| Contact carrier material               | PA                           |
| Material for screw connection          | Zinc die-cast, nickel-plated |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 63 V DC                    |
| Nominal current $I_N$ | 12 A                       |

### Mechanical properties

#### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

### Connector

#### Connection 1

|             |                 |
|-------------|-----------------|
| Type        | Plug angled M12 |
| Coding type | T (Power)       |

#### Connection 2

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|

### Cable/line

|              |      |
|--------------|------|
| Cable length | 10 m |
|--------------|------|


# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

PUR halogen-free black [PUR]

|                                               |                                                                                    |
|-----------------------------------------------|------------------------------------------------------------------------------------|
| Dimensional drawing                           |  |
| Cable weight                                  | 133 kg/km                                                                          |
| UL AWM Style                                  | 20233 / 10493 (80°C/300 V)                                                         |
| Number of positions                           | 4                                                                                  |
| Shielded                                      | yes                                                                                |
| Cable type                                    | PUR halogen-free black [PUR]                                                       |
| Conductor cross section                       | 4x 1.5 mm²                                                                         |
| Wire diameter incl. insulation                | 2.4 mm                                                                             |
| External cable diameter                       | 9.70 mm ±0.3 mm                                                                    |
| Outer sheath, material                        | PUR                                                                                |
| External sheath, color                        | black RAL 9005                                                                     |
| Conductor material                            | Bare Cu litz wires                                                                 |
| Material wire insulation                      | PP                                                                                 |
| Single wire, color                            | brown, white, blue, black                                                          |
| Thickness, insulation                         | 1.20 mm (Outer cable sheath)                                                       |
| Overall twist                                 | 4 wires optimally twisted                                                          |
| Max. conductor resistance                     | ≤ 13.3 Ω/km (at 20 °C)                                                             |
| Insulation resistance                         | ≥ 10 MΩ*km (at 20 °C)                                                              |
| Nominal voltage, cable                        | 300 V AC                                                                           |
| Test voltage                                  | 1500 V AC (5 min.)                                                                 |
| Smallest bending radius, fixed installation   | 49 mm                                                                              |
| Smallest bending radius, movable installation | 73 mm                                                                              |
| Max. bending cycles                           | 4000000                                                                            |
| Bending radius                                | 97 mm                                                                              |
| Traversing path                               | 10 m                                                                               |
| Traversing rate                               | 3 m/s                                                                              |
| Acceleration                                  | 10 m/s²                                                                            |
| Torsion force                                 | ± 25 °/m                                                                           |
| Halogen-free                                  | in accordance with DIN VDE 0472 part 815<br>according to IEC 60754-1               |
| Flame resistance                              | in accordance with EN 60332-1-2<br>in acc. to UL 1581 VW1                          |
| Resistance to oil                             | in accordance with DIN EN 60811-2-1<br>According to DIN EN 50363-10-2              |
| Ambient temperature (operation)               | -40 °C ... 90 °C (cable, fixed installation)                                       |

# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

|  |                                                 |
|--|-------------------------------------------------|
|  | -30 °C ... 90 °C (Cable, flexible installation) |
|--|-------------------------------------------------|

## Environmental and real-life conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient conditions              |                                  |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-111 |

# SAC-4P-M12MRT/10,0-PUR SH - Power cable




1424127


<https://www.phoenixcontact.com/pc/products/1424127>

## Drawings

Circuit diagram

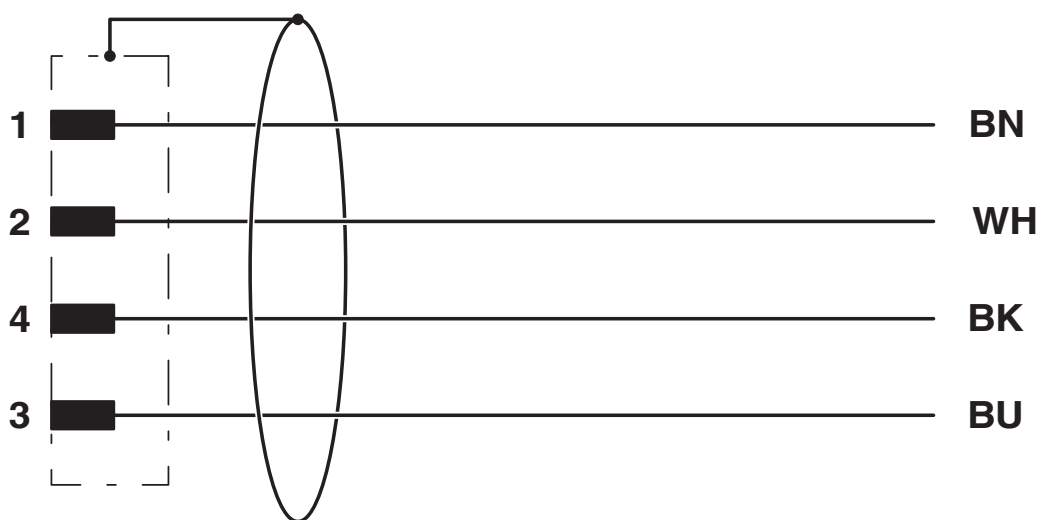


Dimensional drawing

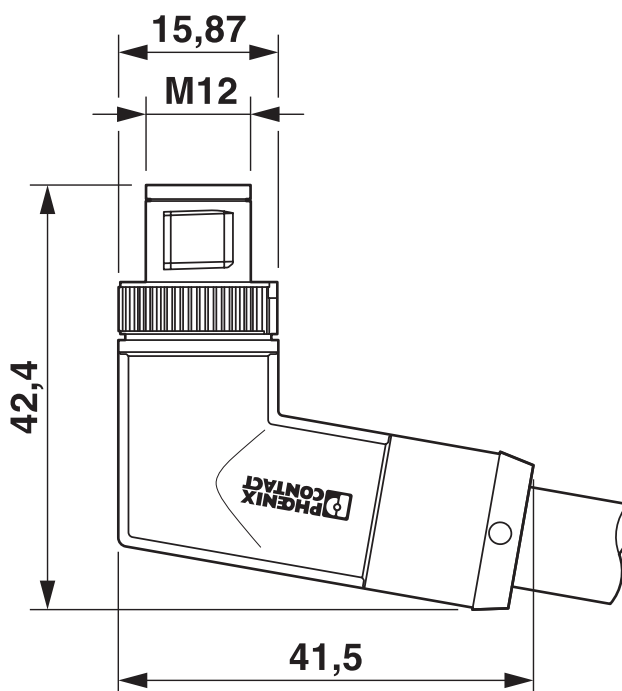


M12 x 1 male plug, angled

Schematic diagram

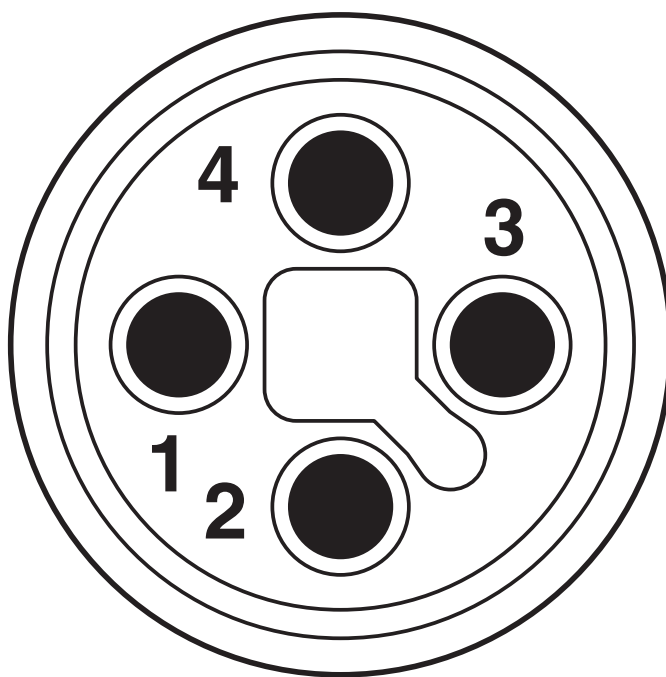

Pin assignment for M12 plug, 4-pos., T-coded, view of plug side

Diagram

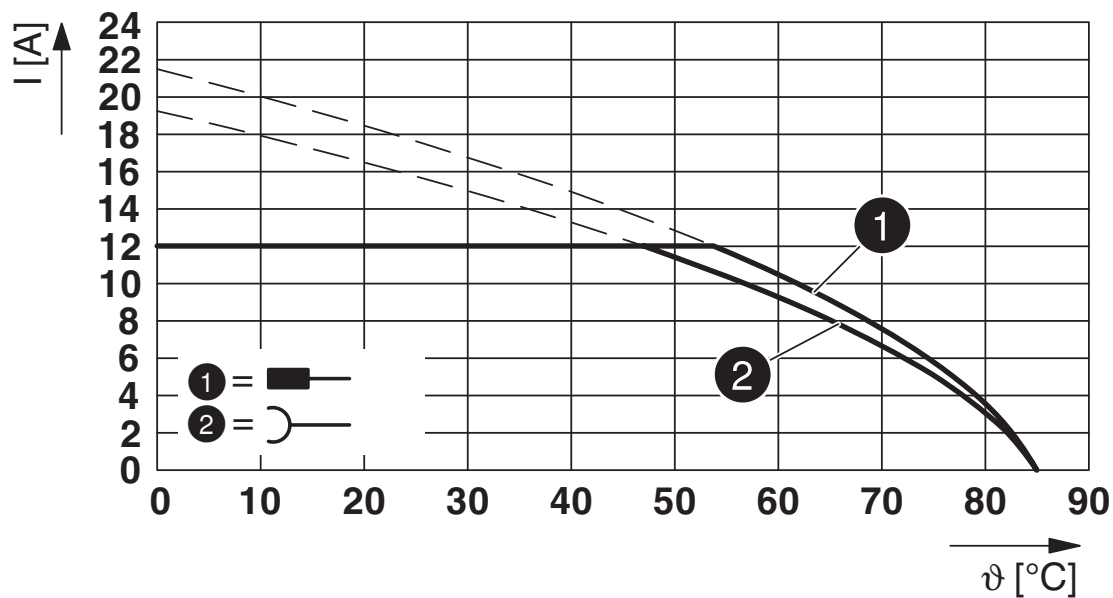

Base curve

# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1424127>

|  |                                          |                                |                   |                               |
|--|------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>UL Listed</b><br>Approval ID: E468743 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>           | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 63 V                                     | 12 A                           | -                 | - 16                          |

|  |                                           |                                |                   |                               |
|--|-------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>cUL Listed</b><br>Approval ID: E468743 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>            | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 63 V                                      | 12 A                           | - 16              | -                             |

|  |                                                      |  |  |  |
|--|------------------------------------------------------|--|--|--|
|  | <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |
|  |                                                      |  |  |  |

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| <b>cULus Listed</b> |  |  |  |  |
|---------------------|--|--|--|--|

# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060327 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-4P-M12MRT/10,0-PUR SH - Power cable



1424127

<https://www.phoenixcontact.com/pc/products/1424127>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)