

# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, black RAL 9005, shielded (Advanced Shielding Technology), free cable end, on Socket angled M12, coding: T, cable length: 10 m, For direct current up to 12 A/63 V

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special T-coding
- Shield power reliably – 360° shielding to reduce electromagnetic loads
- Our standard: robust halogen-free PUR cable

## Commercial data

Item number	1424128
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF05
Product key	BF1CCQ
Catalog page	Page 290 (C-2-2019)
GTIN	4046356693233
Weight per piece (including packing)	1,442 g
Weight per piece (excluding packing)	1,400 g
Customs tariff number	85444290
Country of origin	US

# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

## Technical data

### Product properties

Product type	Power cable
Application	Power supply
Number of positions	4
No. of cable outlets	1
Shielded	yes
Coding	T

### Data management status

Article revision	06
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

### Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	63 V DC
Nominal current $I_N$	12 A

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

### Connector

#### Connection 1

Type	free cable end
------	----------------

#### Connection 2

Type	Socket angled M12
Coding type	T (Power)

### Cable/line

Cable length	10 m
--------------	------


# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

PUR halogen-free black [PUR]

Dimensional drawing	
Cable weight	133 kg/km
UL AWM Style	20233 / 10493 (80°C/300 V)
Number of positions	4
Shielded	yes
Cable type	PUR halogen-free black [PUR]
Conductor cross section	4x 1.5 mm <sup>2</sup>
Wire diameter incl. insulation	2.4 mm
External cable diameter	9.70 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	brown, white, blue, black
Thickness, insulation	1.20 mm (Outer cable sheath)
Overall twist	4 wires optimally twisted
Max. conductor resistance	≤ 13.3 Ω/km (at 20 °C)
Insulation resistance	≥ 10 MΩ*km (at 20 °C)
Nominal voltage, cable	300 V AC
Test voltage	1500 V AC (5 min.)
Smallest bending radius, fixed installation	49 mm
Smallest bending radius, movable installation	73 mm
Max. bending cycles	4000000
Bending radius	97 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s <sup>2</sup>
Torsion force	± 25 °/m
Halogen-free	in accordance with DIN VDE 0472 part 815 according to IEC 60754-1
Flame resistance	in accordance with EN 60332-1-2 in acc. to UL 1581 VW1
Resistance to oil	in accordance with DIN EN 60811-2-1 According to DIN EN 50363-10-2
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)

# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

	-30 °C ... 90 °C (Cable, flexible installation)
--	---

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

## Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111

# SAC-4P-10,0-PUR/M12FRT SH - Power cable


1424128

<https://www.phoenixcontact.com/us/products/1424128>



## Drawings

Schematic diagram

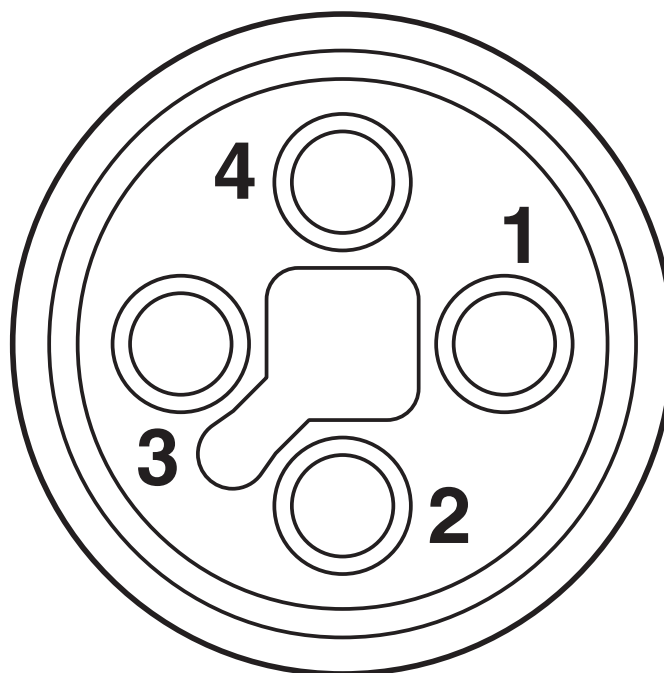

Pin assignment of M12 socket, 4-pos., T-coded, socket side view


# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128


<https://www.phoenixcontact.com/us/products/1424128>

Dimensional drawing

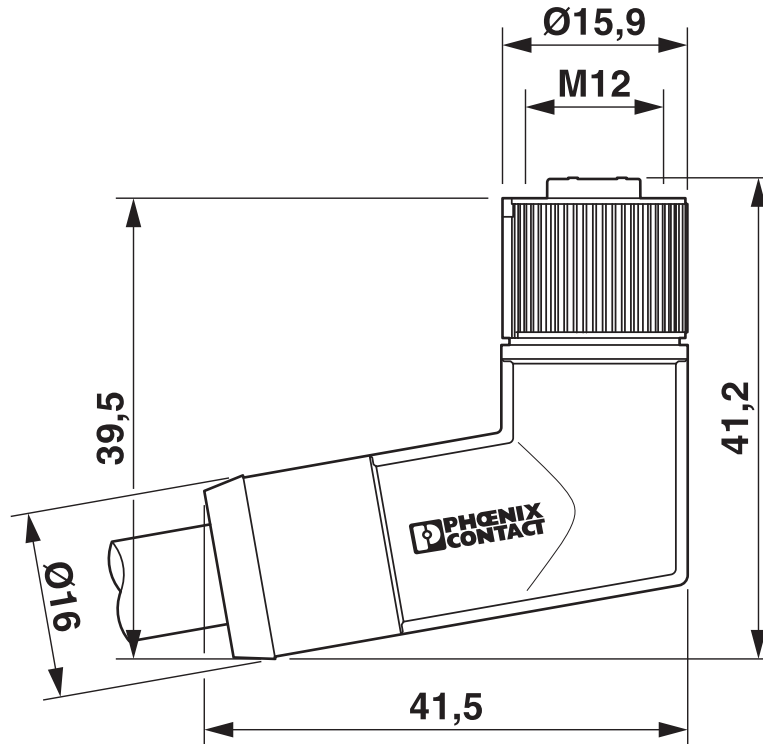

M12 x 1 socket, angled

Circuit diagram

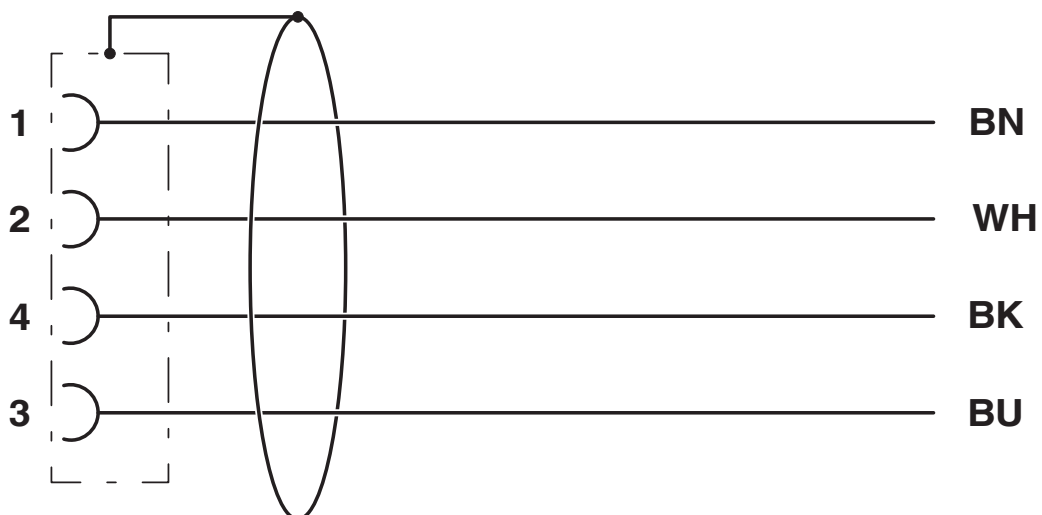


# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

Diagram

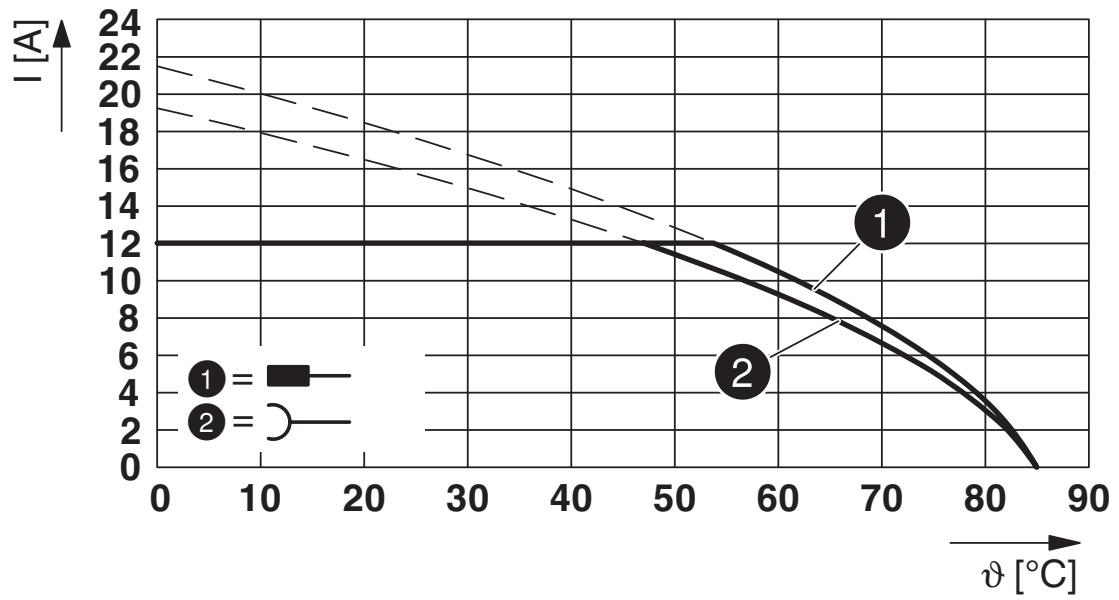

Base curve

# SAC-4P-10,0-PUR/M12FRT SH - Power cable





1424128


<https://www.phoenixcontact.com/us/products/1424128>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424128>

 <b>UL Listed</b> Approval ID: E468743				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group keine				
	63 V	12 A	-	- 16

 <b>cUL Listed</b> Approval ID: E468743				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group keine				
	63 V	12 A	- 16	-

 <b>EAC-RoHS</b> Approval ID: RU D-DE.HB35.B.00387				
--	--	--	--	--

<b>cULus Listed</b>				
---------------------	--	--	--	--



# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060327

### ETIM

ETIM 9.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# SAC-4P-10,0-PUR/M12FRT SH - Power cable



1424128

<https://www.phoenixcontact.com/us/products/1424128>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)