

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing



1424365

<https://www.phoenixcontact.com/pc/products/1424365>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases D15, with single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 2, lateral, 2x M25, height: 52 mm, cable gland: none, Standard

Commercial data

Item number	1424365
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF7APE
Catalog page	Page 527 (C-2-2019)
GTIN	4055626371078
Weight per piece (including packing)	156.7 g
Weight per piece (excluding packing)	156 g
Customs tariff number	85389099
Country of origin	CN

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing



1424365


<https://www.phoenixcontact.com/pc/products/1424365>

Technical data

Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Product family	HC-STA-D
Application	Standard
Type	D15
No. of cable outlets	2
Type of the screw connection	2x M25
Type	Low design
Cable outlet	lateral
Pg screw connection	none

Dimensions

Dimensional drawing	
Width	51 mm
Height	52 mm
Length	80 mm
Hole diameter	4.5 mm

Material specifications

Flammability rating according to UL 94	V0 (Interlock)
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Locking latch material	PA

Mechanical properties

Mechanical data

Type of the screw connection	2x M25
Locking type	Latch

Connection data

Tightening torque	0.8 Nm ... 1.2 Nm (for M4 mounting screws on the surface-mount housing)
-------------------	---

Mounting

Assembly note	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.
---------------	---

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP67
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing




1424365

<https://www.phoenixcontact.com/pc/products/1424365>

Drawings

Dimensional drawing

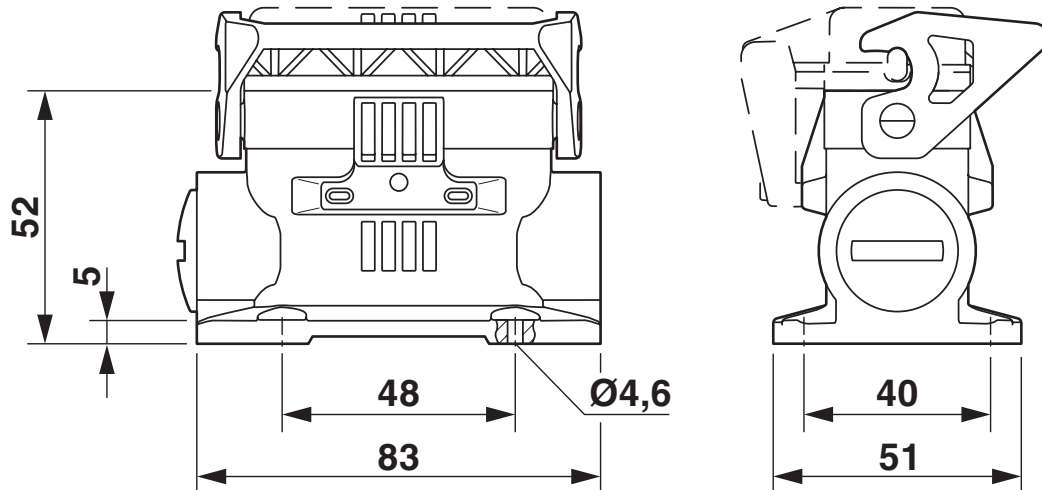

Dimensional drawing

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing



1424365

<https://www.phoenixcontact.com/pc/products/1424365>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1424365>

**DNV**
Approval ID: TAE000037S

**cUL Recognized**
Approval ID: E255026

**UL Recognized**
Approval ID: E255026

**EAC**
Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing



1424365

<https://www.phoenixcontact.com/pc/products/1424365>

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing



1424365

<https://www.phoenixcontact.com/pc/products/1424365>

Accessories

G-INS-M25-S68N-NNES-S - Cable gland

1424527

<https://www.phoenixcontact.com/pc/products/1424527>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 10 mm ... 14 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

G-INS-M25-M68N-NNES-S - Cable gland

1411165

<https://www.phoenixcontact.com/pc/products/1411165>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



G-INSEC-M25-S68N-NCRS-S - Cable gland

1411190

<https://www.phoenixcontact.com/pc/products/1411190>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 11 mm ... 16 mm, shielding: yes, connecting thread: M25 x 1.5, color: silver, with O-ring

G-INS-M25-M68N-SNES-S - Cable gland

1424544

<https://www.phoenixcontact.com/pc/products/1424544>



Cable gland, material for screw connection: Stainless steel 1.4305, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



A-INSP-M25-65N-P-BK - Screw plug

1415207

<https://www.phoenixcontact.com/pc/products/1415207>

Screw plug, material for screw connection: PA, connecting thread: M25 x 1.5, color: jet black RAL 9005, with O-ring



HC-M-BS-M25 - Screw plug

1645859

<https://www.phoenixcontact.com/pc/products/1645859>

Screw plug, material for screw connection: Brass, nickel-plated, connecting thread: M25 x 1.5, color: silver



HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



HC-M-D15-MF-HB - Module carrier frame

1062122

<https://www.phoenixcontact.com/pc/products/1062122>

Module carrier frame, size: D15, 0.14 mm² ... 2.5 mm², application: Module carrier frame, for size D15 housings



HC-D15-BC-HI-PLBK - Protective cover

1414673

<https://www.phoenixcontact.com/pc/products/1414673>

Protective cover D15, for single locking latch, protective cover material: PC, height: 15.2 mm, seal: no



HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



HC-D15-BCFS-PR-BK - Protective cover

1346518

<https://www.phoenixcontact.com/pc/products/1346518>



Protective cover D15, for single locking latch, protective cover material: PC, height: 19 mm, seal: yes

HC-D15-SL-PLBK - Housing brackets

1414667

<https://www.phoenixcontact.com/pc/products/1414667>



Replacement single locking latch, plastic, for HC-EVO-D15....BK and HC-STA-D15....AL housings

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



WP-G HF IP66 M25 BK - Screw connection

3240899

<https://www.phoenixcontact.com/pc/products/3240899>

Cable gland, metric thread, IP66 protection, straight



WP-G HF IP69K M25 BK - Screw connection

3240885

<https://www.phoenixcontact.com/pc/products/3240885>

Cable gland, metric thread, IP68/69k protection, straight



HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



WP-GA HF IP66 M25 BK - Screw connection

3240927

<https://www.phoenixcontact.com/pc/products/3240927>

Cable gland, metric thread, IP66 protection, angled



WP-GA HF IP69K M25 BK - Screw connection

3240913

<https://www.phoenixcontact.com/pc/products/3240913>

Cable gland, metric thread, IP68/69k protection, angled



HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



WP-GR HF IP66 M25 BK - Screw connection

3240955

<https://www.phoenixcontact.com/pc/products/3240955>



Cable gland, metric thread, IP66 protection, with strain relief

WP-GR HF IP69K M25 BK - Screw connection

3240941

<https://www.phoenixcontact.com/pc/products/3240941>



Cable gland, metric thread, IP68/69k protection, with strain relief

HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



WP-G PP HF M25 - Screw connection

3240999

<https://www.phoenixcontact.com/pc/products/3240999>

Cable gland made from PP with metric thread, IP65 protection



WP-GT PP HF M25 - Screw connection

3241013

<https://www.phoenixcontact.com/pc/products/3241013>

Cable gland made from PP with metric thread, rotatable, IP54 protection



HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



WP-G BRASS IP40 M25 - Screw connection

3241048

<https://www.phoenixcontact.com/pc/products/3241048>

Cable gland made from brass with metric thread, IP40 protection



WP-GT BRASS M25 - Screw connection

3241034

<https://www.phoenixcontact.com/pc/products/3241034>

Cable gland made from brass with metric thread, rotatable, IP40 protection



HC-STA-D15-SLWS-2SSM25-EL-AL - Housing

1424365

<https://www.phoenixcontact.com/pc/products/1424365>



WP-G BRASS IP65 M25 - Screw connection

3241062

<https://www.phoenixcontact.com/pc/products/3241062>

Cable gland made from brass with metric thread, IP65 protection



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com