

# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, coding: L, cable length: 3 m, for direct current up to 16 A/63 V

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against mismatching, thanks to special L-coding
- Our standard: robust halogen-free PUR cable

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1425078             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product key                          | BF1CCR              |
| Catalog page                         | Page 296 (C-2-2019) |
| GTIN                                 | 4055626384160       |
| Weight per piece (including packing) | 450.34 g            |
| Weight per piece (excluding packing) | 450.34 g            |
| Customs tariff number                | 85444290            |
| Country of origin                    | PL                  |

# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

## Technical data

### Product properties

|                      |              |
|----------------------|--------------|
| Product type         | Power cable  |
| Application          | Power supply |
| Number of positions  | 4            |
| No. of cable outlets | 1            |
| Shielded             | no           |
| Coding               | L            |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 03 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Material specifications

|                                        |                              |
|----------------------------------------|------------------------------|
| Flammability rating according to UL 94 | V0                           |
| Material of grip body                  | PP                           |
| Contact material                       | CuZn                         |
| Contact surface material               | Ni/Au                        |
| Contact carrier material               | PA                           |
| Material for screw connection          | Zinc die-cast, nickel-plated |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 63 V DC                    |
| Nominal current $I_N$ | 16 A                       |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Connector

#### Connection 1

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|

#### Connection 2

|             |                   |
|-------------|-------------------|
| Type        | Socket angled M12 |
| Coding type | L (Power)         |

### Cable/line

|              |     |
|--------------|-----|
| Cable length | 3 m |
|--------------|-----|


# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

PUR halogen-free black [PUR]

|                                               |                                                                                                                            |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Dimensional drawing                           |                                          |
| Cable weight                                  | 144 kg/km                                                                                                                  |
| UL AWM Style                                  | 20233 / 10493 (80°C/300 V)                                                                                                 |
| Number of positions                           | 4                                                                                                                          |
| Shielded                                      | no                                                                                                                         |
| Cable type                                    | PUR halogen-free black [PUR]                                                                                               |
| Conductor cross section                       | 4x 2.5 mm²                                                                                                                 |
| Wire diameter incl. insulation                | 2.85 mm ±0.1 mm                                                                                                            |
| External cable diameter                       | 8.80 mm ±0.25 mm                                                                                                           |
| Outer sheath, material                        | PUR                                                                                                                        |
| External sheath, color                        | black-gray RAL 7021                                                                                                        |
| Conductor material                            | Bare Cu litz wires                                                                                                         |
| Material wire insulation                      | PP                                                                                                                         |
| Single wire, color                            | brown, white, blue, black                                                                                                  |
| Thickness, insulation                         | ≥ 0.31 mm                                                                                                                  |
| Thickness, outer sheath                       | approx. 0.76 mm                                                                                                            |
| Max. conductor resistance                     | ≤ 8 Ω/km (at 20 °C)                                                                                                        |
| Insulation resistance                         | ≥ 1 GΩ*km (at 20 °C)                                                                                                       |
| Nominal voltage, cable                        | ≤ 300 V AC                                                                                                                 |
| Test voltage                                  | ≥ 3000 V AC (Spark test)                                                                                                   |
| Minimum bending radius, fixed installation    | 5 x D                                                                                                                      |
| Minimum bending radius, flexible installation | 10 x D                                                                                                                     |
| Smallest bending radius, fixed installation   | 44 mm                                                                                                                      |
| Smallest bending radius, movable installation | 88 mm                                                                                                                      |
| Dynamic load capacity (bending)               | Max. bending cycles: 4000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s² |
| Halogen-free                                  | in accordance with DIN VDE 0472 part 815<br>in accordance with DIN EN 50267-2-1                                            |
| Flame resistance                              | According to UL 758/1581 (Cable Flame)<br>according to UL 758/1581 FT1<br>According to DIN EN 60332-1-2                    |
| Resistance to oil                             | according to DIN EN 60811-404, 168 h at 100 °C                                                                             |
| Other resistance                              | Hydrolysis and microbe resistant as per VDE 0282 section 10<br>Low adhesion<br>abrasion-resistant                          |

# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
|                                 | Resistant to salt water                         |
| Ambient temperature (operation) | -50 °C ... 80 °C (cable, fixed installation)    |
|                                 | -30 °C ... 80 °C (Cable, flexible installation) |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-111 |

# SAC-4P- 3,0-PUR/M12FRL - Power cable


1425078

<https://www.phoenixcontact.com/pc/products/1425078>




## Drawings

Dimensional drawing

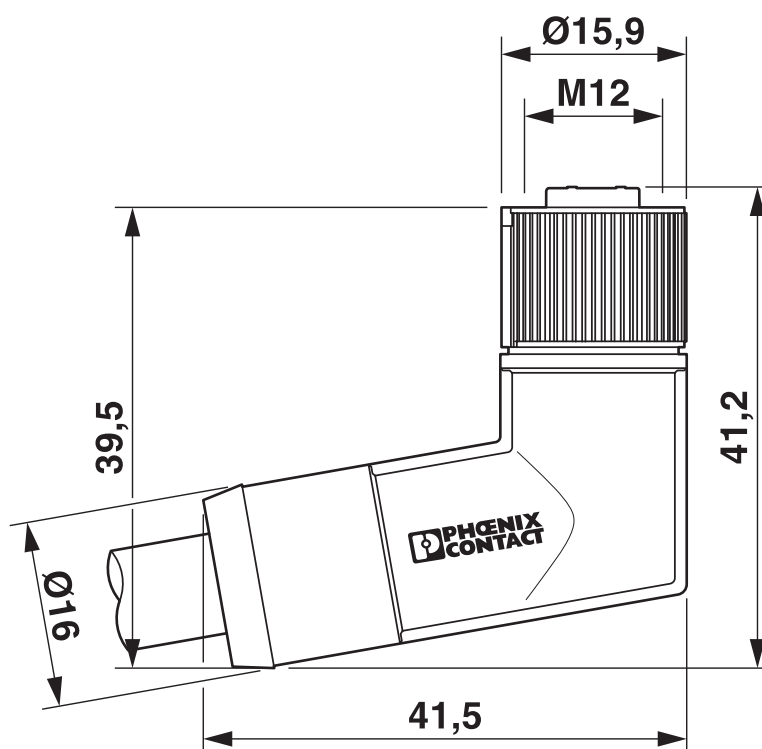

M12 x 1 socket, angled

Diagram

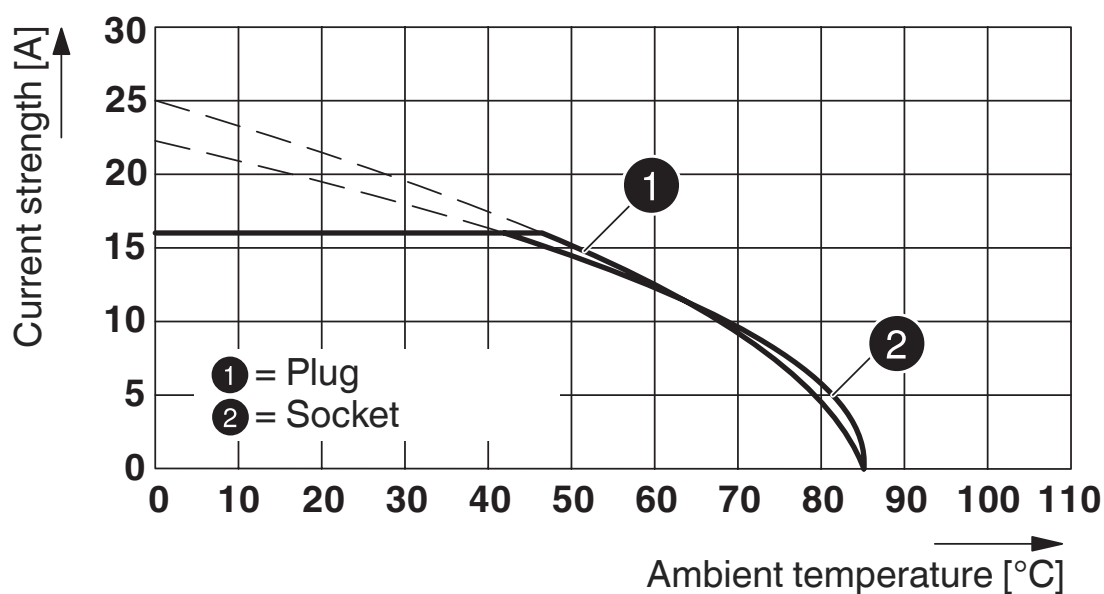


# SAC-4P- 3,0-PUR/M12FRL - Power cable

1425078

<https://www.phoenixcontact.com/pc/products/1425078>




Schematic diagram

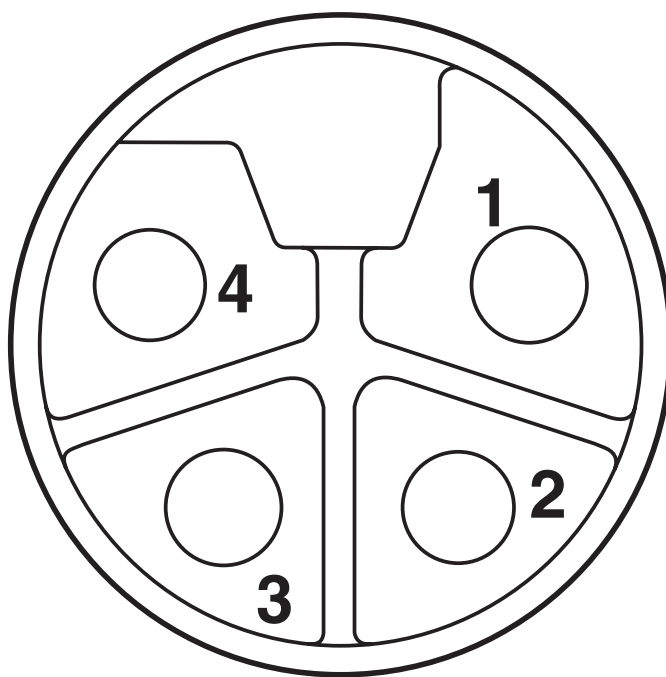

Pin assignment of M12 socket, 4-pos.

Circuit diagram

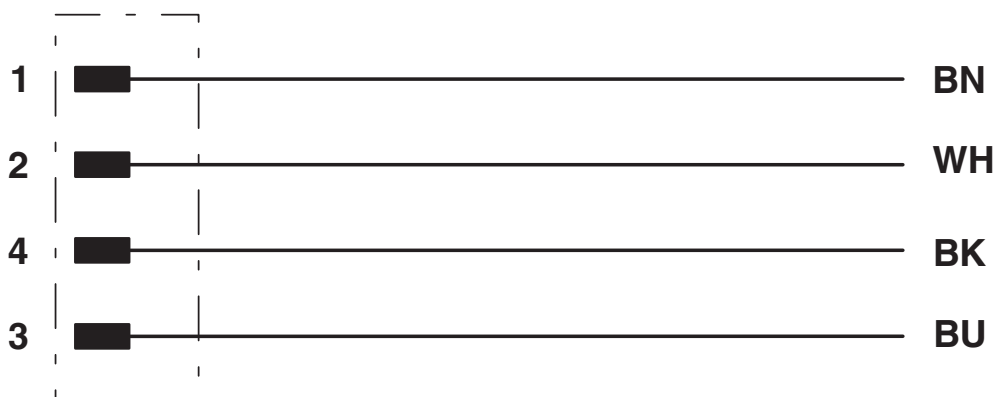

# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1425078>



**UL Listed**

Approval ID: E468743



**cUL Listed**

Approval ID: E468743



**EAC-RoHS**

Approval ID: RU D-DE.HB35.B.00387

**cULus Listed**

# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060327 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|



# SAC-4P- 3,0-PUR/M12FRL - Power cable



1425078

<https://www.phoenixcontact.com/pc/products/1425078>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)