

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Data connector, VARAN, 6-position, shielded, Socket angled M12, coding: A, Insulation displacement connection, knurl material: Brass, nickel-plated, external cable diameter 4 mm ... 8 mm

Your advantages

- Safe use in the field, thanks to a high degree of protection
- Insulation displacement connection: innovative and time-saving assembly without stripping the single wire
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

Item number	1429169
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF
Product key	BF2CDM
Catalog page	Page 343 (C-2-2019)
GTIN	4046356323123
Weight per piece (including packing)	55.1 g
Weight per piece (excluding packing)	55.1 g
Customs tariff number	85366990
Country of origin	DE

Technical data

Notes

Assembly note

NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.

Mounting

Assembly note

The connector pin assignment can be rotated 45° to the cable outlet

Product properties

Product type	Circular connector (cable-side)
Application	Data
Sensor type	VARAN
Number of positions	6
No. of cable outlets	1
Shielded	yes
Coding	A
Cable outlet	angled

Data management status

Article revision	08
------------------	----

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Dimensions

External dimensions

Outside diameter	4 mm ... 8 mm
------------------	---------------

Material specifications

Flammability rating according to UL 94	V0
Seal material	Neoprene
Material of grip body	Zinc die-cast, nickel-plated
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 6
Material for screw connection	Brass, nickel-plated

Connection data

Conductor connection

Connection method	Insulation displacement connection
-------------------	------------------------------------

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Connection cross section	0.14 mm ² ... 0.34 mm ²
Connection cross section AWG	26 ... 22
Tightening torque	0.4 Nm (M12 knurl)
	0.8 Nm (Connector with coupling sleeve)
	3 Nm (Pressure nut with coupling sleeve)

Electrical properties

Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	30 V AC
	30 V DC
Nominal current I _N	2 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

Connector

Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12
Coding	A

Cable/line

Signal type/category	VARAN
----------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 85 °C

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	according to IEC 61076-2-101

SACC-M12FR-6Q SH VARAN - Data connector


1429169

<https://www.phoenixcontact.com/ie/products/1429169>



Drawings

Dimensional drawing

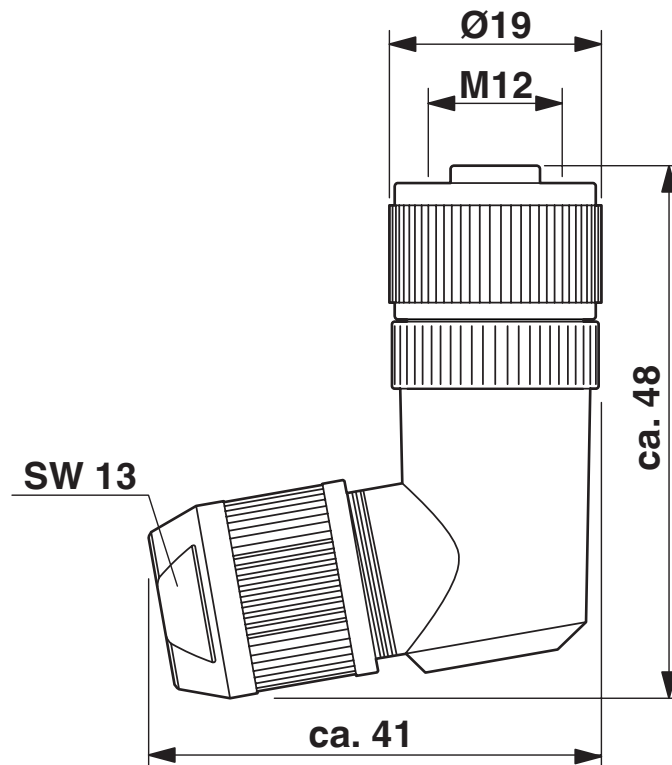


M12 x 1 socket, angled, shielded

1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Schematic diagram

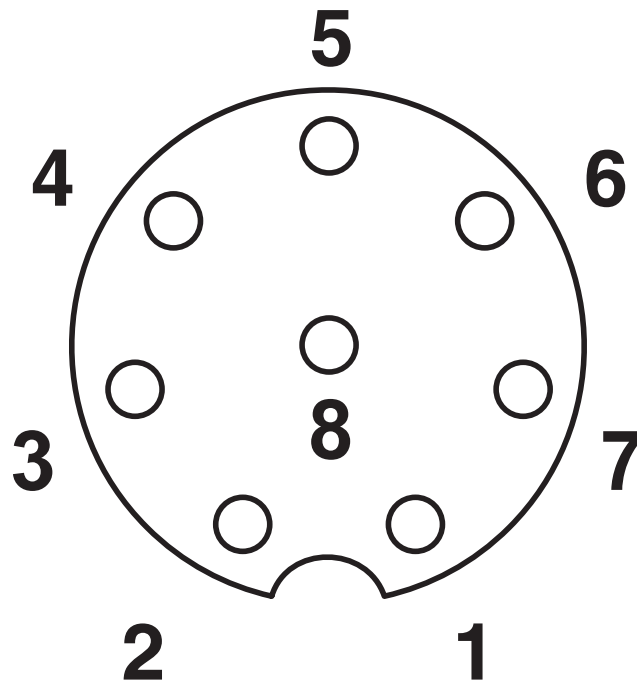

M12 socket pin assignment, 6-pos., socket side view

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ie/products/1429169>



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

Accessories

PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/ie/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



ALU-SB - Shielding foil

1404531

<https://www.phoenixcontact.com/ie/products/1404531>

Shielding foil, for fixing the braided shield of shielded cables. Length: 4 cm, width: 1.2 cm



SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/ie/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

SACC BIT M12-D20 - Tool

1208445

<https://www.phoenixcontact.com/ie/products/1208445>



Nut for assembling M12 connectors for assembly with a knurl diameter of 20 mm, for 4 mm hexagonal drive

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/ie/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/ie/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

TSD 08 SAC - Torque screwdriver

1212597

<https://www.phoenixcontact.com/ie/products/1212597>



Torque screw driver with preset torque of 0.8 Nm, with 4 mm hexagon for accommodating SAC bits, two-component handle with non-slip grip

WIREFOX-D 40 - Stripping tool

1212161

<https://www.phoenixcontact.com/ie/products/1212161>



Stripping tool, for stripping cables of 4.5 mm - 40 mm-Ø, insulation thickness of up to 4.5 mm, pivoting blade for round, lengthwise, and spiral cuts

SACC-M12FR-6Q SH VARAN - Data connector



1429169

<https://www.phoenixcontact.com/ie/products/1429169>

MICROFOX-SB - Diagonal cutter

1212489

<https://www.phoenixcontact.com/ie/products/1212489>



Electronic diagonal cutter, round head, without chamfer, with opening spring, mirror-polished and oiled, 2-component grip, cutting capacity: soft 0.2 - 2.0 mm; medium hard 1.2 mm; hard 0.5 mm diameter

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact (Ireland) Ltd
C6 The Exchange, Calmount Park, Ballymount
Dublin 12, D12 XE18
+353/1/2051-300
info@phoenixcontact.ie