

# SACC-FR-4SC M SCO - Connector



1432622

<https://www.phoenixcontact.com/pc/products/1432622>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Connector, 4-position, Socket angled M12 SPEEDCON, coding: A, Spring-cage connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm



## Your advantages

- Safe use in the field, thanks to a high degree of protection
- Save time, thanks to installation with SPEEDCON fast locking system
- Spring-cage connection: connect more securely, even in the case of shock and vibration, thanks to high contact forces

## Commercial data

Item number	1432622
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF2CEA
Catalog page	Page 19 (C-4-2015)
GTIN	4046356348140
Weight per piece (including packing)	28 g
Weight per piece (excluding packing)	26.5 g
Customs tariff number	85366990
Country of origin	DE

# SACC-FR-4SC M SCO - Connector



1432622

<https://www.phoenixcontact.com/pc/products/1432622>

## Technical data

### Mounting

Assembly note	The connector pin assignment can be rotated 45° to the cable outlet
	The wires can be connected both with ferrules and without ferrules

### Product properties

Product type	Circular connector (cable-side)
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A
Cable outlet	angled

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Dimensions

#### External dimensions

Outside diameter	4 mm ... 8 mm (3.5 mm ... 4 mm available on request)
------------------	--

### Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR
Material of grip body	PA 6.6
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU
Material for screw connection	Zinc die-cast, nickel-plated

### Connection data

#### Conductor connection

Connection method	Spring-cage connection
Connection cross section	0.14 mm² ... 0.5 mm²
Connection cross section AWG	26 ... 20
Stripping length of the individual wire	10 mm
Tightening torque	0.4 Nm (M12 knurl)
	0.4 Nm (Connector with coupling sleeve)
	1.5 Nm (Pressure nut with coupling sleeve)

### Electrical properties

# SACC-FR-4SC M SCO - Connector



1432622

<https://www.phoenixcontact.com/pc/products/1432622>

Contact resistance	$\leq 8 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	250 V
Nominal current $I_N$	4 A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	$\geq 100$
-----------------------------	------------

## Connector

### Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

## Cable/line

Stripping length of the individual wire	10 mm
---	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-40 °C ... 85 °C (Plug / socket)

## Standards and regulations

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

# SACC-FR-4SC M SCO - Connector


1432622

<https://www.phoenixcontact.com/pc/products/1432622>



## Drawings

Schematic diagram

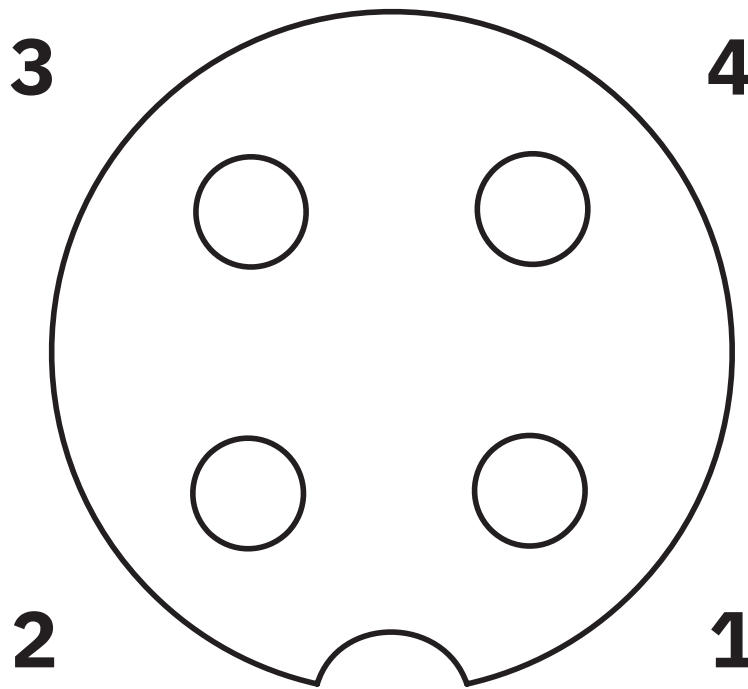

Pin assignment M12 socket, 4-pos., A-coded, view female side


# SACC-FR-4SC M SCO - Connector

1432622

<https://www.phoenixcontact.com/pc/products/1432622>



Dimensional drawing

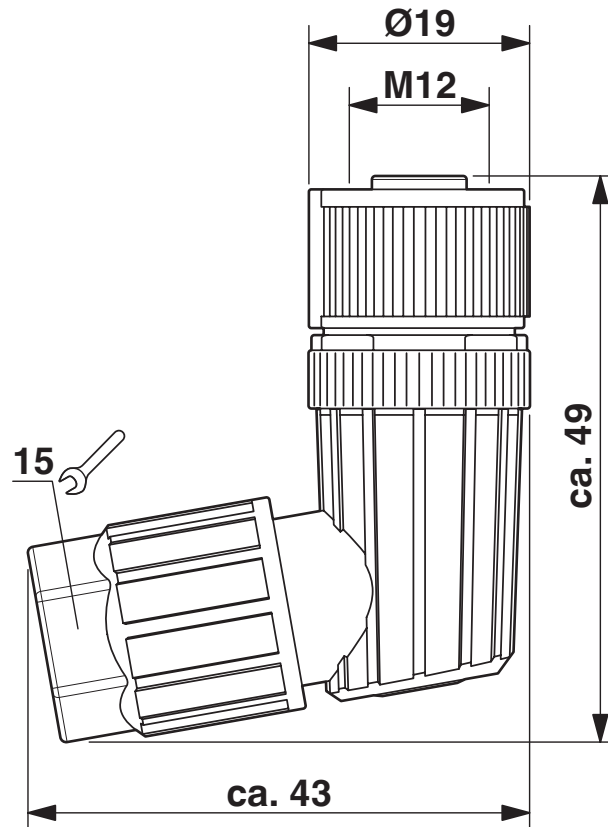

M12-SPEEDCON socket, angled


# SACC-FR-4SC M SCO - Connector

1432622

<https://www.phoenixcontact.com/pc/products/1432622>



Functional drawing

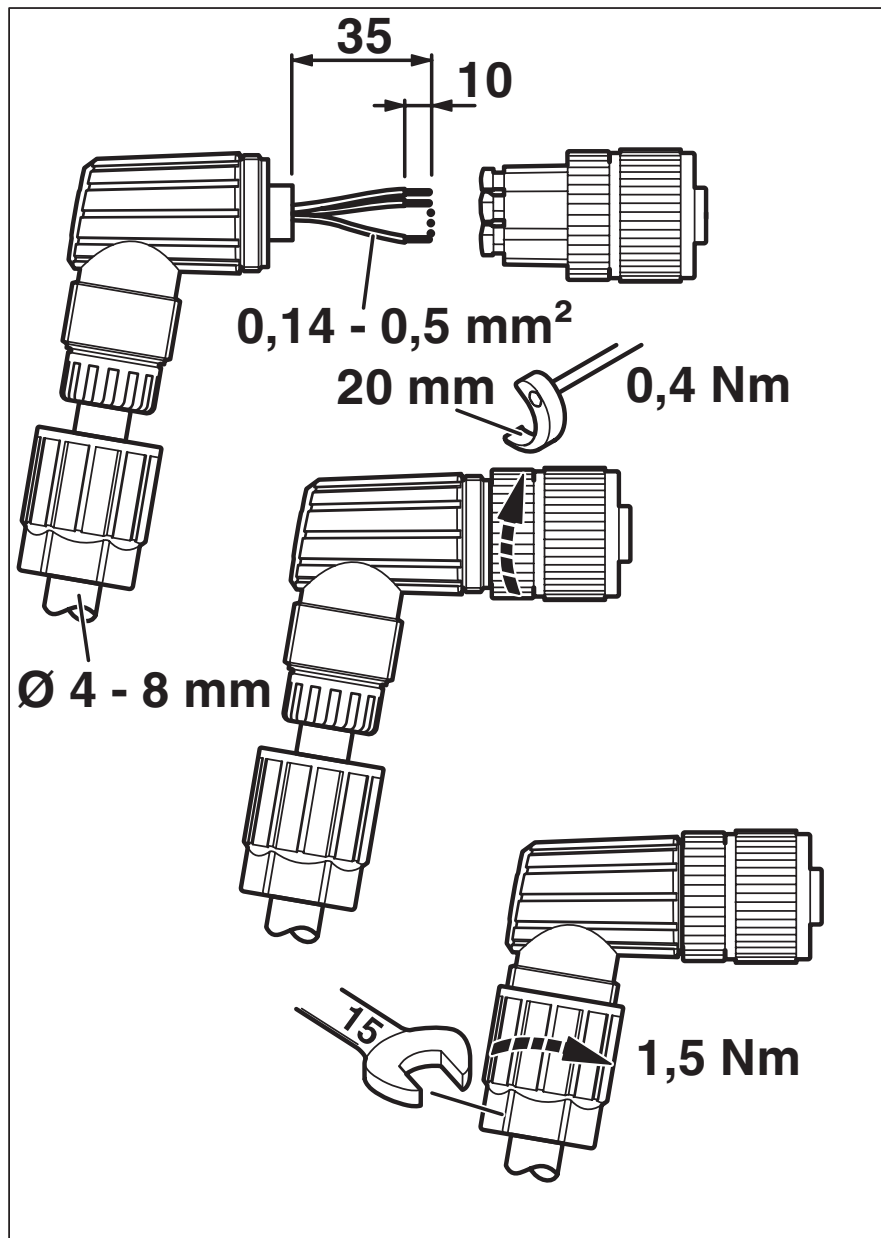

Strip 28 mm off the cable, 35 mm in the case of the angled version, strip single wires, push the pressure nut onto the cable. Slide the wires through the sleeve housing and connect, screw sleeve housing to the plug insert, screw the pressure nut tight.

# SACC-FR-4SC M SCO - Connector



1432622

<https://www.phoenixcontact.com/pc/products/1432622>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-13.0	27440116

# SACC-FR-4SC M SCO - Connector



1432622

<https://www.phoenixcontact.com/pc/products/1432622>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)