

1436564

https://www.phoenixcontact.com/us/products/1436564

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, Socket, angled, M12-SPEEDCON, coding: A, Rear mounting, M12 x 1, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239619

Commercial data

Item number	1436564	
Packing unit	10 pc	
Minimum order quantity	10 pc	
Sales key	AB26	
Product key	ABQEHI	
Catalog page	Page 30 (PC-2009)	
GTIN	4046356438636	
Weight per piece (including packing)	13.33 g	
Weight per piece (excluding packing)	12.64 g	
Customs tariff number	85366990	
Country of origin	DE	



1436564

https://www.phoenixcontact.com/us/products/1436564

Technical data

Notes

Мо	punting	
	Mounting type	Rear mounting M12 x 1 With flat nut
	Assembly note	With flat nut

Lock nut is included in the scope of delivery

Product properties

Order information:

Product type	Circular connectors (device side)	
Number of positions	4	
Shielded	no	
Coding	A	
Thread type	M12	

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	НВ
Seal material	NBR
Contact material	Cu alloy
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection Zinc die-cast, nickel-plated	

Electrical properties

Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	60 V
Nominal current I _N	4 A

Connection data

Conductor connection

Connection method	Solder pins
Contact connection type	Socket

Connector

Connection 1

Head design	Socket



1436564

https://www.phoenixcontact.com/us/products/1436564

Head cable outlet	angled
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67	
	IP67	
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)	

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101




1436564

https://www.phoenixcontact.com/us/products/1436564

Drawings

Schematic diagram

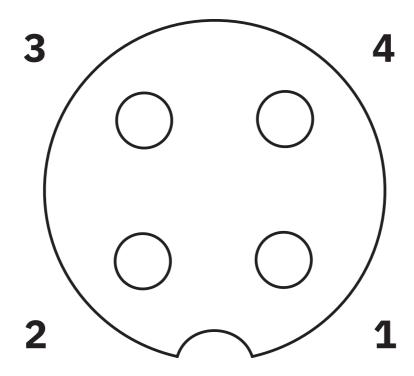

Pin assignment M12 socket, 4-pos., A-coded, view female side



1436564

https://www.phoenixcontact.com/us/products/1436564

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1436564

UL Recognized Approval ID: E118976-20100522					
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	22 - 22	-



1436564

https://www.phoenixcontact.com/us/products/1436564

Classifications

UNSPSC 21.0

ECLASS

_			
	ECLASS-11.0	27440102	
	ECLASS-12.0	27440116	
	ECLASS-13.0	27440116	
ETIM			
	ETIM 9.0	EC002635	
UNSPSC			

39121400



1436564

https://www.phoenixcontact.com/us/products/1436564

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	03cc8a86-b8ff-4fec-a5f9-65bdb475c7df

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com