

1436602

https://www.phoenixcontact.com/us/products/1436602

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Pin, angled, M12-SPEEDCON, coding: A, Rear mounting, M12 x 1, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239623

Commercial data

Item number	1436602
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	AB26
Product key	ABQEGI
Catalog page	Page 30 (PC-2009)
GTIN	4046356438674
Weight per piece (including packing)	13.05 g
Weight per piece (excluding packing)	12.37 g
Customs tariff number	85366990
Country of origin	DE



1436602

https://www.phoenixcontact.com/us/products/1436602

Technical data

Notes

Мс	punting	
	Mounting type	Rear mounting M12 x 1 With flat nut
	Assembly note	With flat nut

Lock nut is included in the scope of delivery

Product properties

Order information:

Product type	Circular connectors (device side)		
Number of positions	5		
Shielded	no		
Coding	A		
Thread type	M12		
Insulation characteristics			
Overvoltage category	II		
Degree of pollution	3		

Data management status

Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	60 V
Nominal current I _N	4 A

Connection data

Conductor connection

Connection method	Solder pins
Contact connection type	Pin

Connector



1436602

https://www.phoenixcontact.com/us/products/1436602

Connection 1

Head design	Pin
Head cable outlet	angled
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)



1436602

https://www.phoenixcontact.com/us/products/1436602

Drawings

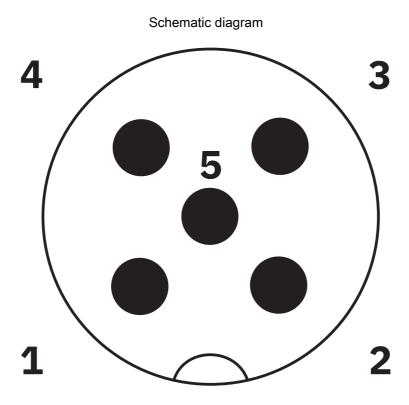

Pin assignment M12 male connector, 5-pos., A-coded, male side



1436602

https://www.phoenixcontact.com/us/products/1436602

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1436602

UL Recognized Approval ID: E118976-20100522					
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	22 - 22	-



1436602

https://www.phoenixcontact.com/us/products/1436602

Classifications

ECI	_ASS
-----	------

	ECLASS-13.0	27440109		
ETIM				
	ETIM 9.0	EC002635		
UNSPSC				
	UNSPSC 21.0	39121400		



1436602

https://www.phoenixcontact.com/us/products/1436602

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8e5083c1-8d8f-4e6a-ae09-fd92e5bed61e

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com