

SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting



1440009
<https://www.phoenixcontact.com/pc/products/1440009>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, Socket, straight, M12-SPEEDCON, coding: A, Rear mounting, M12 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239701

Commercial data

Item number	1440009
Packing unit	60 pc
Minimum order quantity	60 pc
Product key	ABQAIA
Catalog page	Page 32 (PC-2009)
GTIN	4046356476720
Weight per piece (including packing)	11.366 g
Weight per piece (excluding packing)	11.366 g
Customs tariff number	85366990
Country of origin	DE

SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting



1440009

<https://www.phoenixcontact.com/pc/products/1440009>

Technical data

Notes

Order information:	Lock nut is included in the scope of delivery
--------------------	---

Mounting

Mounting type	Rear mounting M12 x 1 With flat nut
Assembly note	With flat nut

Product properties

Product type	Circular connectors (device side)
Number of positions	4
Shielded	no
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Data management status

Article revision	12
------------------	----

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Contact material	Cu alloy
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	60 V
Nominal current I_N	4 A

Connection data

Conductor connection	
Connection method	THR solder connection
Contact connection type	Socket

Connector

SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting



1440009

<https://www.phoenixcontact.com/pc/products/1440009>

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting




1440009

<https://www.phoenixcontact.com/pc/products/1440009>

Drawings

Schematic diagram

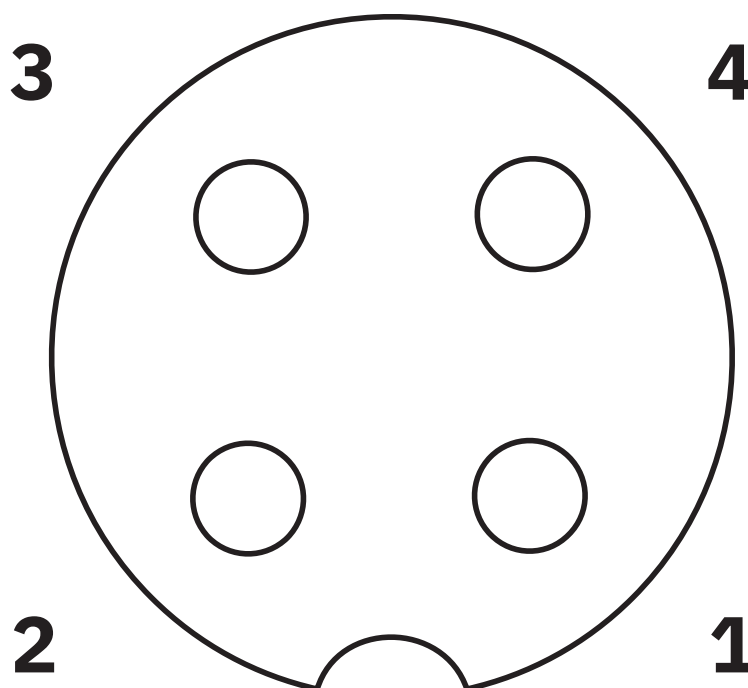

Pin assignment M12 socket, 4-pos., A-coded, view female side


SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting



1440009
<https://www.phoenixcontact.com/pc/products/1440009>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1440009>

	UL Recognized Approval ID: E118976-20100522			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	4 A	22 - 22	-

SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting



1440009
<https://www.phoenixcontact.com/pc/products/1440009>

Classifications

ECLASS

ECLASS-13.0	27440109
-------------	----------

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-DSIV-FS-4CON-L180SCOTHRSH - Device connector rear mounting



1440009
<https://www.phoenixcontact.com/pc/products/1440009>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	4ab6ed3e-5cdf-49e8-be3b-e283808c6059

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com