

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, Universal, 4-position, Plug straight M12, coding: A, Insulation displacement connection, knurl material: Stainless steel 1.4404, external cable diameter 3.5 mm ... 6 mm

Your advantages

- Safe use in the field, thanks to a high degree of protection
- Insulation displacement connection: innovative and time-saving assembly without stripping the single wire

Commercial data

Item number	1440753
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF
Product key	BF2CCA
Catalog page	Page 20 (C-2-2019)
GTIN	4046356517034
Weight per piece (including packing)	14.56 g
Weight per piece (excluding packing)	14.3 g
Customs tariff number	85366990
Country of origin	DE

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Technical data

Notes

Assembly note

NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.

Mounting

Assembly note

AWG 20 conductor cross section upon request

Product properties

Product type	Circular connector (cable-side)
Sensor type	Universal
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A

Data management status


Article revision	03
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing



Length	54 mm
Wrench size, union nut	13 mm

External dimensions

Outside diameter	3.5 mm ... 6 mm
------------------	-----------------

Housing

Diameter housing	16.3 mm
------------------	---------

Material specifications

Flammability rating according to UL 94	V0
Seal material	Neoprene
Material of grip body	PA 6
Contact material	CuSn

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Contact surface material	Ni/Au
Contact carrier material	TPU
Material for screw connection	Stainless steel 1.4404
Wire insulation material	PVC / PE / PP / rubber

Connection data

Conductor connection

Connection method	Insulation displacement connection
Connection cross section	0.14 mm² ... 0.34 mm²
Connection cross section AWG	26 ... 22
Tightening torque	0.4 Nm (M12 knurl)
	1.2 Nm (Pressure nut)

Pin assignment

Contact Color (signal designation) Contact (optional)	1 = BN
	2 = WH
	3 = BU
	4 = BK

Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	125 V AC
	125 V DC
Nominal current I _N	4 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

Connector

Connection 1

Head design	Plug
Head cable outlet	straight
Head thread type	M12
Coding	A

Cable/line

Signal type/category	Universal
External cable diameter	3.5 mm ... 6 mm

Environmental and real-life conditions

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 80 °C (Plug / socket)
Ambient temperature (assembly)	-5 °C ... 50 °C (During assembly)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	according to IEC 61076-2-101



SACC-M12MS-4QO-0,34-VA - Connector

1440753

<https://www.phoenixcontact.com/ie/products/1440753>



Drawings

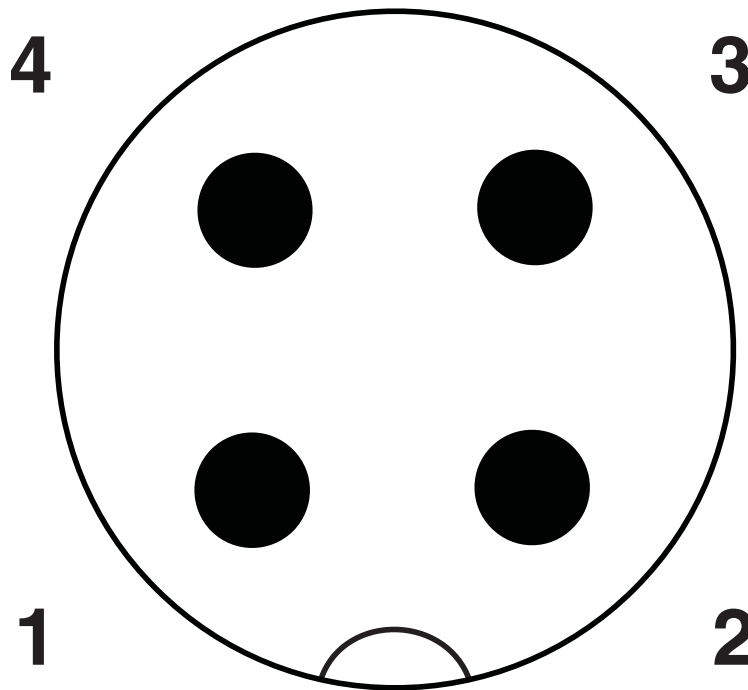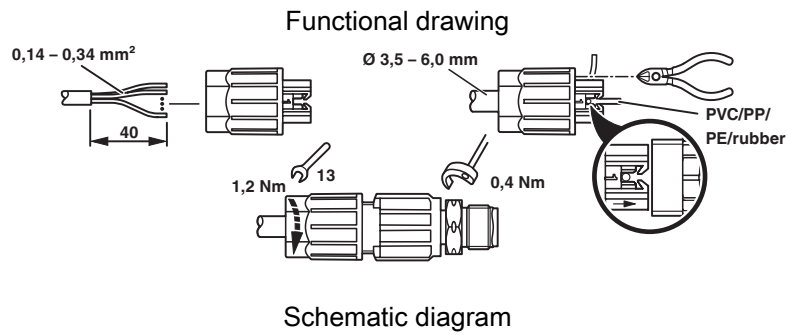


Pin assignment M12 plug, 4-pos., A-coded, view plug side

SACC-M12MS-4QO-0,34-VA - Connector

1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Dimensional drawing

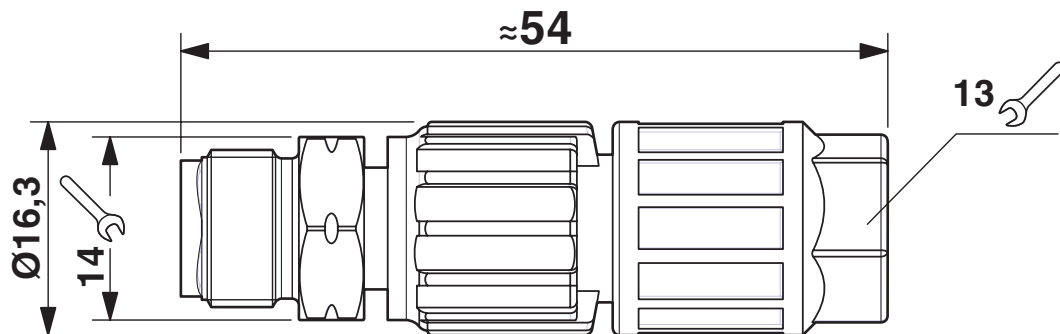

M12 plug, straight,
QUICKON connection: 0.14 mm² ... 0.34 mm²

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ie/products/1440753>

DNV

Approval ID: TAE00002K4



EAC

Approval ID: RU C-DE.BL08.B.00511

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

SACC-M12MS-4QO-0,34-VA - Connector



1440753

<https://www.phoenixcontact.com/ie/products/1440753>

Accessories

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/ie/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/ie/products/1208429>

Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors



SACC-M12MS-4QO-0,34-VA - Connector

1440753

<https://www.phoenixcontact.com/ie/products/1440753>



SAC BIT M12-W14 - Tool

1212513

<https://www.phoenixcontact.com/ie/products/1212513>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a hexagonal knurl wrench size of 14 mm, with 4 mm hexagonal drive

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/ie/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

SACC-M12MS-4QO-0,34-VA - Connector

1440753

<https://www.phoenixcontact.com/ie/products/1440753>



TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/ie/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC BIT QUICKON-W13 - Tool

1212033

<https://www.phoenixcontact.com/ie/products/1212033>



Nut for assembling pressure nuts with 13 mm wrench size, for 4 mm hexagonal drive

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact (Ireland) Ltd
C6 The Exchange, Calmount Park, Ballymount
Dublin 12, D12 XE18
+353/1/2051-300
info@phoenixcontact.ie