

1441778

https://www.phoenixcontact.com/us/products/1441778

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Socket, M12, coding: A, Rear mounting, M16 x 1.5, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0. 1 %) item no.: 1239736

## Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · SPEEDCON fast locking system reduces cabling times

## Commercial data

Item number	1441778
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB26
Product key	ABQEHJ
Catalog page	Page 250 (C-2-2013)
GTIN	4046356533973
Weight per piece (including packing)	14.625 g
Weight per piece (excluding packing)	14.555 g
Customs tariff number	85366990
Country of origin	DE



1441778

https://www.phoenixcontact.com/us/products/1441778

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

## Mounting

Mounting type	Rear mounting M16 x 1.5 With flat nut
Assembly instructions	With flat nut

## Product properties

Product type	Circular connectors (device side)
Number of positions	5
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	
Overvoltage category	II

## Dimensions

Length of the solder pin	6 mm
	6 mm

3

## Material specifications

Degree of pollution

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

## Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	60 V
Nominal current I <sub>N</sub>	4 A



1441778

https://www.phoenixcontact.com/us/products/1441778

### Connection data

### Conductor connection

Connection method	Wave soldering
Contact connection type	Socket
Tightening torque	3 Nm 4 Nm (Installation-side)

## Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 100

### Connector

#### Connection 1

Head design	Socket
Head thread type	M12
Coding	A

## Cable/line

Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

## Standards and regulations

#### M12


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101



1441778

https://www.phoenixcontact.com/us/products/1441778

## Drawings

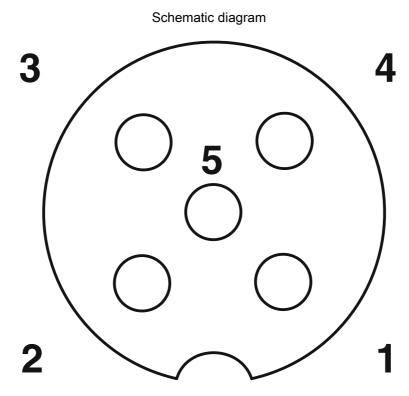

Pin assignment M12 socket, 5-pos., A-coded, socket side view



1441778

https://www.phoenixcontact.com/us/products/1441778

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1441778

cUL Recognized Approval ID: E118976-20100522				
	Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	60 V	4 A	22 - 22	-

<b>71</b>	<b>UL Recognized</b> Approval ID: E118976-20100522				
		Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		60 V	4 A	22 - 22	-

c <b>911</b> us	cULus Recognized Approval ID: E221474-20140616				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		60 V	4 A	22 - 20	-

cULus Recognized



1441778

https://www.phoenixcontact.com/us/products/1441778

## Classifications

## **ECLASS**

	ECLASS-11.0	27440102			
	ECLASS-12.0	27440116			
	ECLASS-13.0	27440116			
ETIM					
	ETIM 9.0	EC002635			
UNSPSC					
	UNSPSC 21.0	39121400			



1441778

https://www.phoenixcontact.com/us/products/1441778

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	08938174-b5d0-46d4-a19f-c159c2b1a3ec



1441778

https://www.phoenixcontact.com/us/products/1441778

## Accessories

SACC-M16-SEAL CLM - Flat gasket

1430394

https://www.phoenixcontact.com/us/products/1430394

M16 flat gasket for M12 flush-type connectors with M16 fastening thread



## PROT-M12 - Screw plug

1680539

https://www.phoenixcontact.com/us/products/1680539



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors



1441778

https://www.phoenixcontact.com/us/products/1441778

## PROT-M12 SH - Screw plug

1503302

https://www.phoenixcontact.com/us/products/1503302



An M12 screw plug for the unoccupied M12 sockets of the shielded sensor/actuator cable, boxes and flush-type connectors

## PROT-M12 FB - Screw plug

1555538

https://www.phoenixcontact.com/us/products/1555538



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com