

1443381

<https://www.phoenixcontact.com/pc/products/1443381>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 5-position, PVC, gray RAL 7001, free cable end, on Socket angled 7/8"-16UNF, coding: A, cable length: 7.5 m, 1.5 mm² conductor cross section, For power supply

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- High-performance: connectors and cables with a large conductor cross section for power supply

Commercial data

Item number	1443381
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF1FDA
Catalog page	Page 278 (C-4-2015)
GTIN	4046356536943
Weight per piece (including packing)	1,329.8 g
Weight per piece (excluding packing)	1,329.8 g
Customs tariff number	85444290
Country of origin	DE

SAC-5P- 7,5-430/MINFR PWR - Power cable



1443381

<https://www.phoenixcontact.com/pc/products/1443381>

Technical data

Product properties

Product type	Sensor/actuator cable
Application	Power supply
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Material of grip body	TPU
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	4000 V
Insulation resistance	$\geq 10 \text{ M}\Omega$
Nominal voltage U_N	63 V DC
Nominal current I_N	10 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	100
-----------------------------	-----

Signaling

Status display	no
Status display present	No

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

Type	Socket angled 7/8"-16UNF
Number of positions	5
Coding type	A

SAC-5P- 7,5-430/MINFR PWR - Power cable




1443381

<https://www.phoenixcontact.com/pc/products/1443381>

Cable/line

Cable length	7.5 m
--------------	-------

PVC gray [430]

Dimensional drawing	
Cable weight	168 kg/km
UL AWM Style	21098 (90 °C / 600 V)
Number of positions	5
Shielded	no
Cable type	PVC gray [430]
AWG signal line	16
Conductor cross section	5x 1.5 mm²
External cable diameter	10.00 mm
Outer sheath, material	PVC
External sheath, color	gray RAL 7001
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, black 3, black 4, green/yellow
Overall twist	5 cores, twisted
Nominal voltage, cable	600 V
Test voltage	3000 V
Minimum bending radius, fixed installation	4 x D
Minimum bending radius, flexible installation	12.5 x D
Smallest bending radius, fixed installation	40 mm
Smallest bending radius, movable installation	125 mm
Flame resistance	UL 1581, Sec. 1061 (Cable Flame) IEC 60332-1-2
Resistance to oil	good oil-resistance
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -5 °C ... 90 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP68

SAC-5P- 7,5-430/MINFR PWR - Power cable



1443381

<https://www.phoenixcontact.com/pc/products/1443381>

Ambient temperature (operation)	-40 °C ... 90 °C (Socket)
	-40 °C ... 90 °C (cable, fixed installation)
	-5 °C ... 90 °C (Cable, flexible installation)

SAC-5P- 7,5-430/MINFR PWR - Power cable




1443381


<https://www.phoenixcontact.com/pc/products/1443381>

Drawings

Circuit diagram

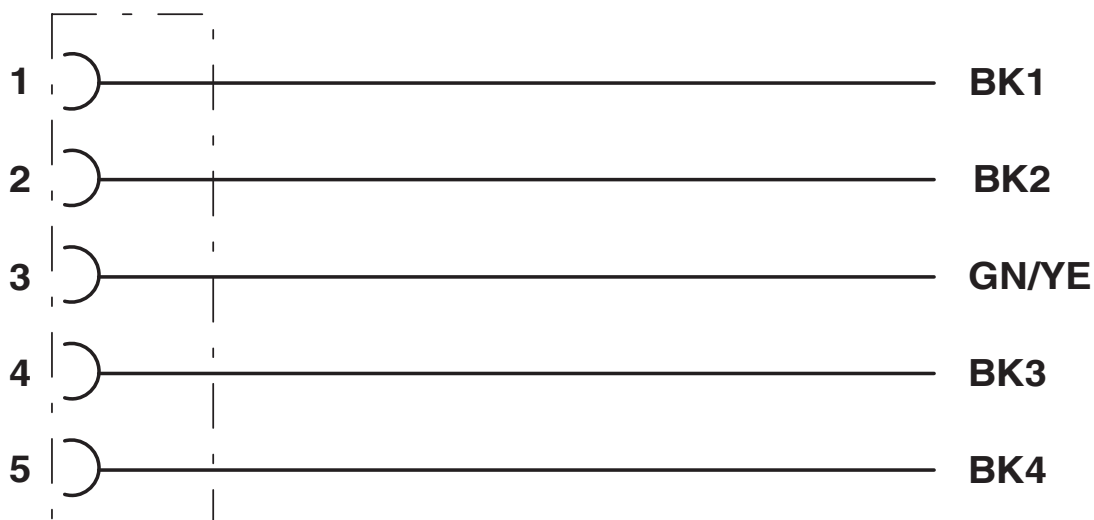

Dimensional drawing

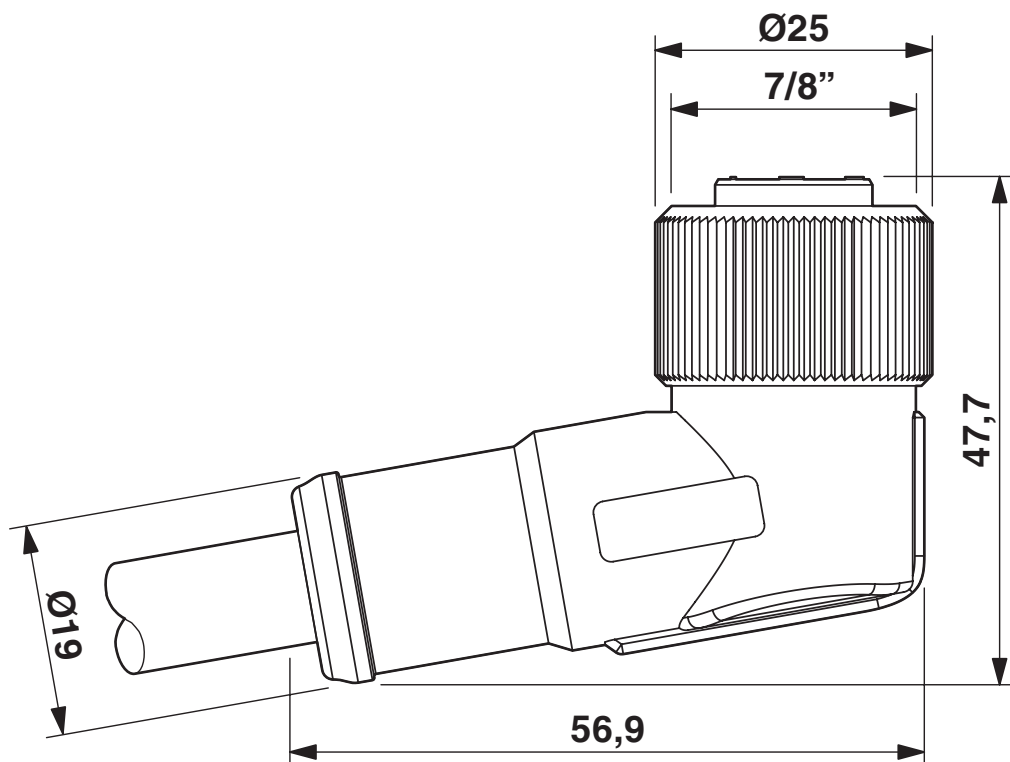

7/8"-16UNF socket, angled


SAC-5P- 7,5-430/MINFR PWR - Power cable

1443381

<https://www.phoenixcontact.com/pc/products/1443381>



Schematic diagram

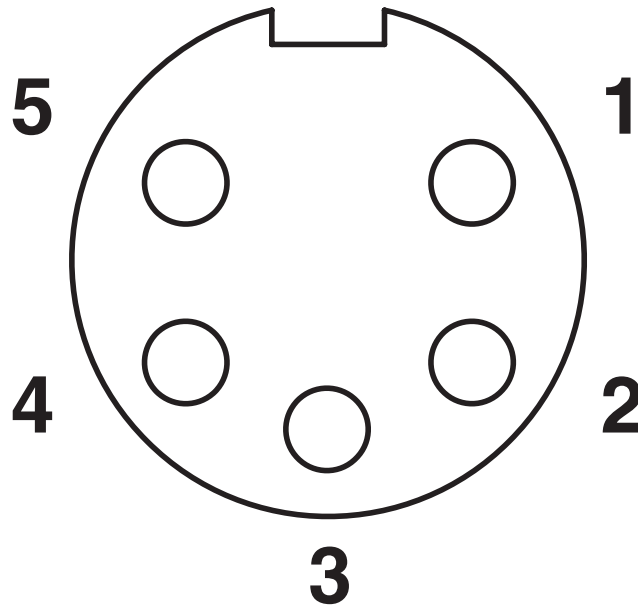

Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side

SAC-5P- 7,5-430/MINFR PWR - Power cable



1443381

<https://www.phoenixcontact.com/pc/products/1443381>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-13.0	27060311

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com