

1443446

<https://www.phoenixcontact.com/us/products/1443446>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 5-position, PVC, gray RAL 7001, Plug straight 7/8"-16UNF, coding: A, on Socket straight 7/8"-16UNF, coding: A, cable length: 2 m, 1.5 mm² conductor cross section, For power supply

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- High-performance: connectors and cables with a large conductor cross section for power supply

Commercial data

Item number	1443446
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	B22
Product key	BF1FDA
Catalog page	Page 278 (C-4-2015)
GTIN	4046356537001
Weight per piece (including packing)	444.8 g
Weight per piece (excluding packing)	430.7 g
Customs tariff number	85444290
Country of origin	DE

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable



1443446

<https://www.phoenixcontact.com/us/products/1443446>

Technical data

Product properties

Product type	Sensor/actuator cable
Application	Power supply
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Material of grip body	TPU
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	4000 V
Insulation resistance	$\geq 10 \text{ M}\Omega$
Nominal voltage U_N	63 V DC
Nominal current I_N	10 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	100
-----------------------------	-----

Signaling

Status display	No
Status display present	No

Connector

Connection 1

Type	Plug straight 7/8"-16UNF
Number of positions	5
Coding type	A

Connection 2

Type	Socket straight 7/8"-16UNF
------	----------------------------

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable



1443446


<https://www.phoenixcontact.com/us/products/1443446>

Number of positions	5
Coding type	A

Cable/line

Cable length	2 m
--------------	-----

PVC gray [430]

Dimensional drawing	
Cable weight	168 kg/km
UL AWM Style	21098 (90 °C / 600 V)
Number of positions	5
Shielded	no
Cable type	PVC gray [430]
AWG signal line	16
Conductor cross section	5x 1.5 mm²
External cable diameter	10.00 mm
Outer sheath, material	PVC
External sheath, color	gray RAL 7001
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, black 3, black 4, green/yellow
Overall twist	5 cores, twisted
Nominal voltage, cable	600 V
Test voltage	3000 V
Minimum bending radius, fixed installation	4 x D
Minimum bending radius, flexible installation	12.5 x D
Smallest bending radius, fixed installation	40 mm
Smallest bending radius, movable installation	125 mm
Flame resistance	UL 1581, Sec. 1061 (Cable Flame) IEC 60332-1-2
Resistance to oil	good oil-resistance
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -5 °C ... 90 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions	IP65
--------------------	------

1443446

<https://www.phoenixcontact.com/us/products/1443446>

Degree of protection	IP67
	IP68
Ambient temperature (operation)	-40 °C ... 90 °C (Plug / socket)
	-40 °C ... 90 °C (cable, fixed installation)
	-5 °C ... 90 °C (Cable, flexible installation)

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable




1443446

<https://www.phoenixcontact.com/us/products/1443446>

Drawings

Dimensional drawing

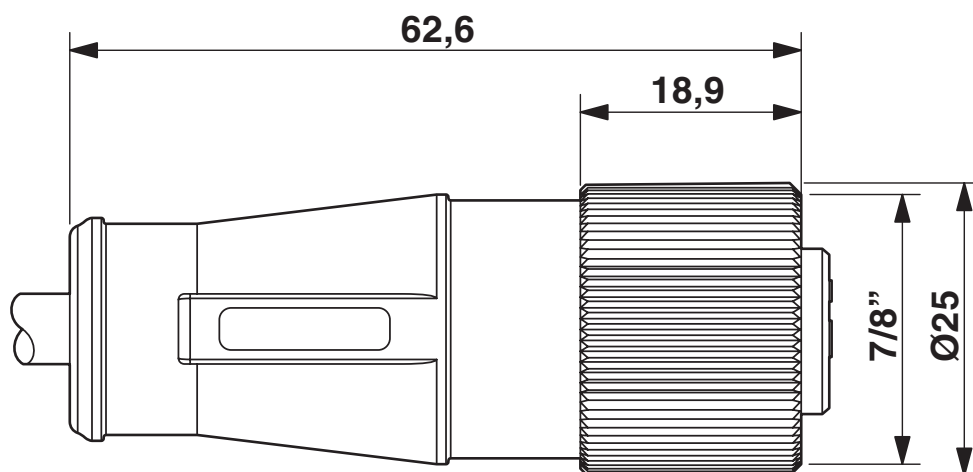

7/8"-16UNF socket, straight


Circuit diagram



1443446


<https://www.phoenixcontact.com/us/products/1443446>

Schematic diagram

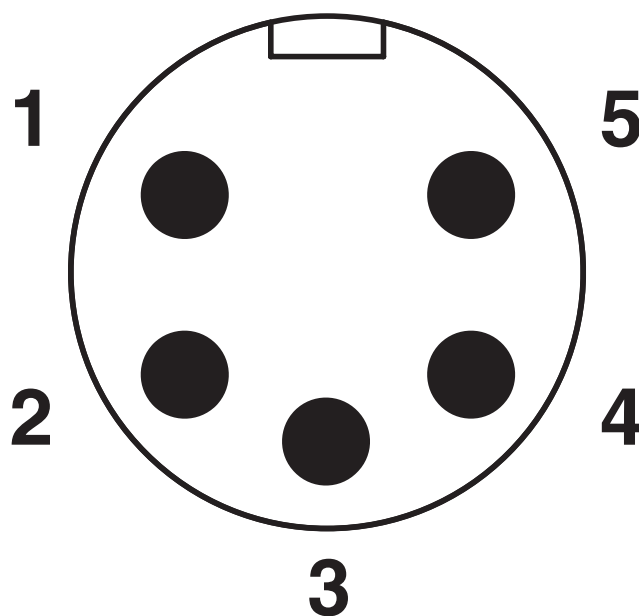

Pin assignment, plug, 7/8"-16UNF, 5-pos., view of male side

Schematic diagram

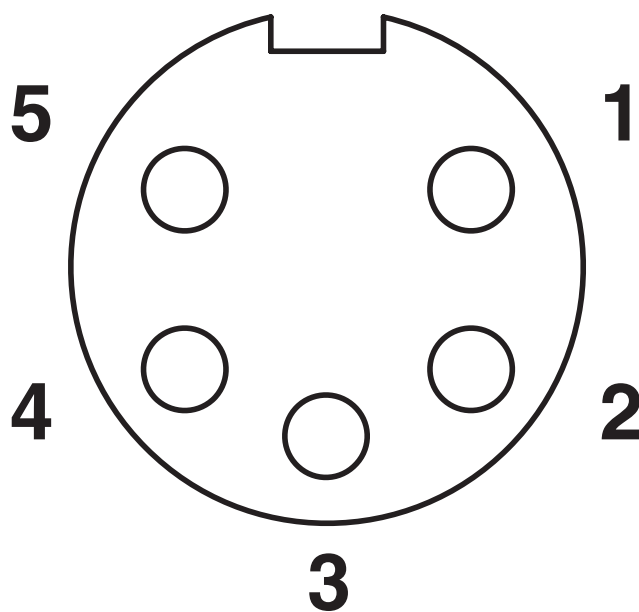


Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side

1443446

<https://www.phoenixcontact.com/us/products/1443446>

Dimensional drawing

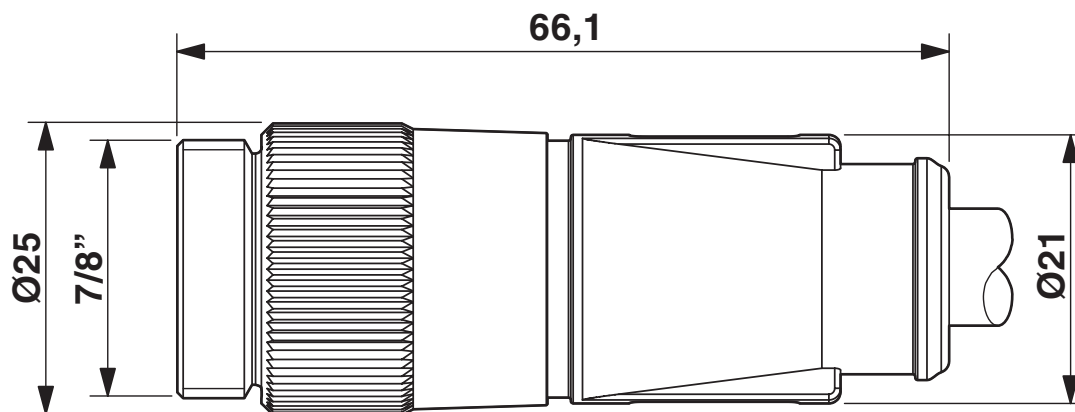

7/8"-16UNF plug, straight

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-13.0	27060311

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable



1443446

<https://www.phoenixcontact.com/us/products/1443446>

Accessories

PROT-MINFS-PA-CHAIN - Sealing cap

1430912

<https://www.phoenixcontact.com/us/products/1430912>

7/8" sealing cap made of plastic with fixing band, for sensor cables, for 7/8" connectors



UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/us/products/0801453>

Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30



SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable



1443446

<https://www.phoenixcontact.com/us/products/1443446>

UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/us/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24

US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/us/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable

1443446

<https://www.phoenixcontact.com/us/products/1443446>



WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/us/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000

PROT-MINMS-PA-CHAIN - Screw plug

1430925

<https://www.phoenixcontact.com/us/products/1430925>

7/8" sealing cap made of plastic with fixing band, for sensor cables, for 7/8" sockets



SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable

1443446

<https://www.phoenixcontact.com/us/products/1443446>



B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

TSD 08 SAC - Torque screwdriver

1212597

<https://www.phoenixcontact.com/us/products/1212597>



Torque screw driver with preset torque of 0.8 Nm, with 4 mm hexagon for accommodating SAC bits, two-component handle with non-slip grip

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable



1443446

<https://www.phoenixcontact.com/us/products/1443446>

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC-5P-MINMS/2,0-430/MINFS PWR - Power cable



1443446

<https://www.phoenixcontact.com/us/products/1443446>

SAC BIT MIN-D25 - Tool

1212512

<https://www.phoenixcontact.com/us/products/1212512>

Nut for assembling 7/8" connectors with a knurl diameter of 25 mm, with 4 mm hexagonal drive



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com