

1452576
<https://www.phoenixcontact.com/cn/products/1452576>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, connection method: M12-SPEEDCON-socket Plastic, number of slots: 4, number of positions: 4, coding: A, slot assignment: single, status display: Yes, pnp; master cable connection: Fixed connection 180°, PUR/PVC, cable length: 5 m, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics
- Save time, thanks to installation with SPEEDCON fast locking system

Commercial data

Item number	1452576
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF3CBA
Product key	BF3CBA
Catalog page	Page 262 (C-2-2019)
GTIN	4046356553902
Weight per piece (including packing)	552 g
Weight per piece (excluding packing)	534 g
Customs tariff number	8536909000
Country of origin	DE

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box



1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Technical data

Notes

General	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
General	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".


Product properties

Product type	Distributor boxes with M8 to M12 slots
Number of positions	4
Application	Standard
Number of slots	4
Coding	A
LED	yes

Material specifications

Material Threaded sleeve	PBT
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA

Dimensions

Dimensional drawing	
Width	54 mm
Height	23 mm
Length	117 mm

Signaling

Status display present	Yes
------------------------	-----

Electrical properties

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box



1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Max. operating voltage U_{max}	30 V DC
Local diagnostics	Supply voltage Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	12 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Cable/line

Cable length	5 m
--------------	-----

PUR/PVC black [PUR]

Dimensional drawing		
Cable weight	77.9 kg/km	
UL AWM Style	20549	
Number of positions	7	
Shielded	no	
Cable type	PUR/PVC black [PUR]	
Conductor structure signal line	19x 0.15 mm	
AWG signal line	22	
Conductor cross section	4x 0.34 mm² (Signal line)	
	3x 0.75 mm² (power line)	
Wire diameter incl. insulation	1.3 mm ±0.1 mm (Signal line)	
	1.8 mm ±0.1 mm (power line)	
External cable diameter	6.90 mm ±0.2 mm	
Outer sheath, material	PUR	
External sheath, color	black RAL 9005	
Conductor material	Bare Cu litz wires	
Material wire insulation	PVC	
Single wire, color	brown, blue, green/yellow, white, green, yellow, gray	
Inner sheath thickness	≥ 0.15 mm	
Thickness, outer sheath	≥ 0.38 mm	
Overall twist	Wires twisted in layers	
Nominal voltage, cable	300 V	
Test voltage	2000 V	
Minimum bending radius, fixed installation	7.5 x D	
Minimum bending radius, flexible installation	10 x D	

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box



1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Smallest bending radius, fixed installation	52 mm
Smallest bending radius, movable installation	69 mm
Max. bending cycles	1500000
Flame resistance	DIN EN 50265
Resistance to oil	according to VDE 0472 Part 803
Other resistance	Highly resistant to acids, alkaline solutions and solvents
Special properties	Silicone-free
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)
	80 °C (in acc. with UL)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 80 °C

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box




1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Drawings

Dimensional drawing

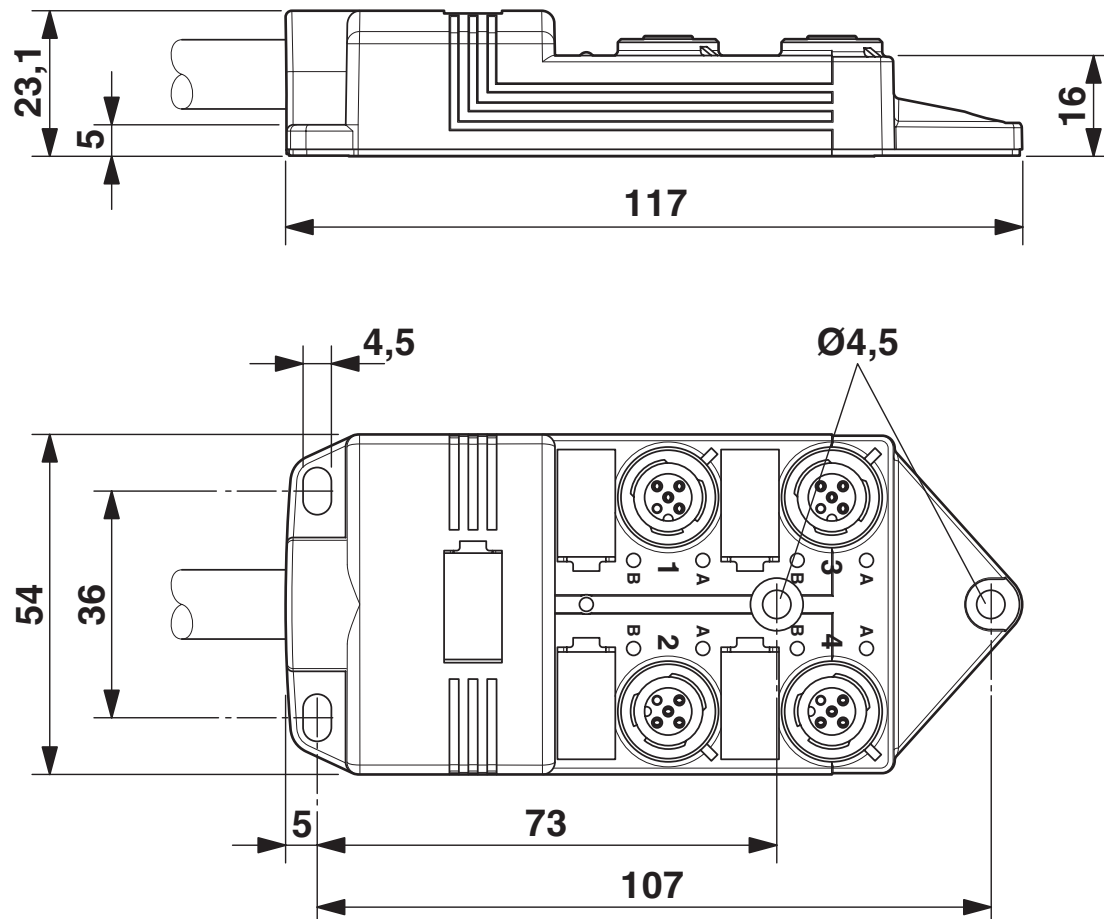


SACB-4/ 4-L- 5,0PUR SCO P - Distributor box

1452576


<https://www.phoenixcontact.com/cn/products/1452576>

Schematic diagram

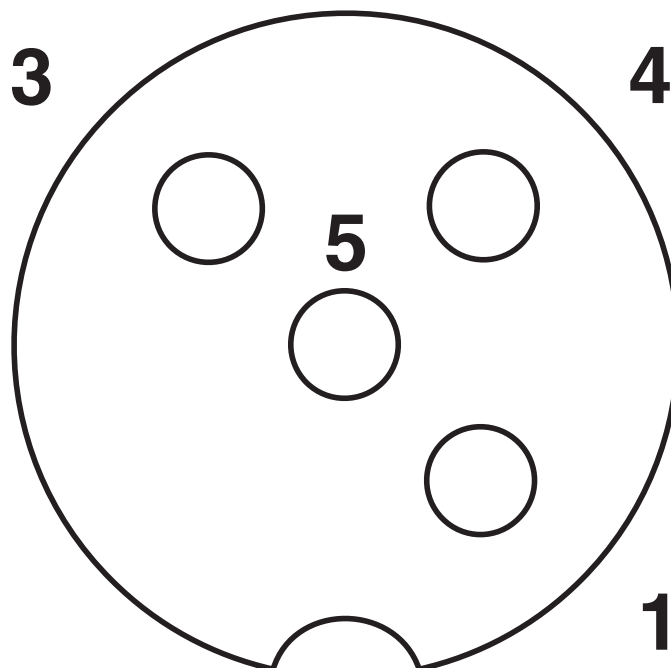

M12 slot, socket, 4-pos.

Circuit diagram

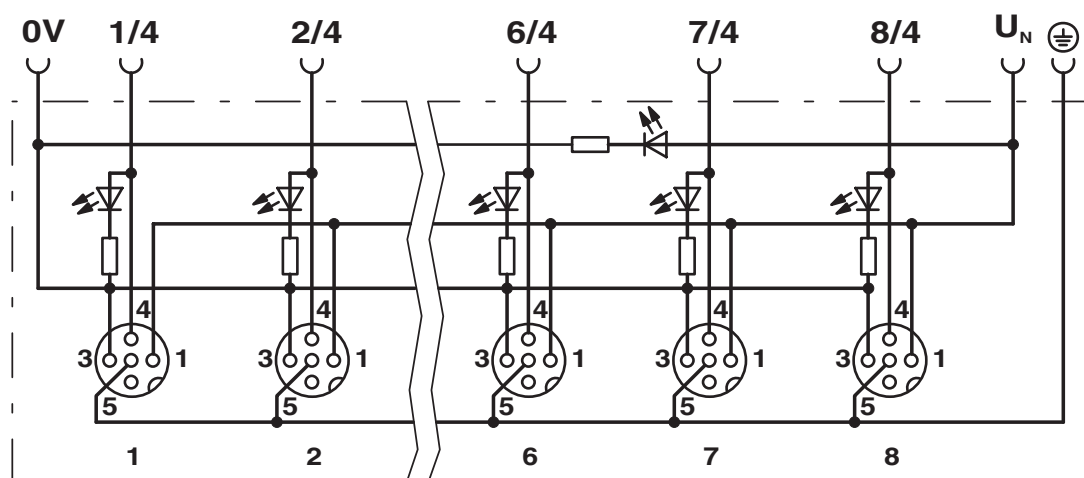

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box



1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/cn/products/1452576>

 cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	-	-	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Signal	-	2 A	-	-
	24 V	4 A	-	-

 EAC Approval ID: RU C-DE.BL08.B.00511				
---	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box



1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Classifications

ECLASS

ECLASS-11.0	27440108
ECLASS-12.0	27440108
ECLASS-13.0	27440108

ETIM

ETIM 9.0	EC002585
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB-4/ 4-L- 5,0PUR SCO P - Distributor box



1452576

<https://www.phoenixcontact.com/cn/products/1452576>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

菲尼克斯（中国）投资有限公司总部
南京市江宁经济开发区菲尼克斯路36号
（江宁236信箱）邮编：211100
025-52121888
phoenix@phoenixcontact.com.cn