

# HC-B 24-TMQ-H-M1PG29G - Housing



1460257

<https://www.phoenixcontact.com/us/products/1460257>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON B24 sleeve housing, with double locking latch, height 72 mm, with screw connection 1 x Pg29, straight cable outlet

## Commercial data

Item number	1460257
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF55
Product key	BF7AAC
Catalog page	Page 536 (C-4-2013)
GTIN	4046356794428
Weight per piece (including packing)	365.23 g
Weight per piece (excluding packing)	365.23 g
Customs tariff number	85389099
Country of origin	DE

# HC-B 24-TMQ-H-M1PG29G - Housing

1460257

<https://www.phoenixcontact.com/us/products/1460257>

## Technical data


### Notes

General	For contact inserts HC-B24, BB46, BBB64, D64, DD108, M
---------	--

### Product properties

Product type	Housing with locking latch
Housing type	Sleeve housing
Application	Standard
Type	B24
No. of cable outlets	1
Type of the screw connection	1x Pg29
Cable outlet	straight
Pg screw connection	with

### Dimensions

Dimensional drawing	
Width	43 mm
Height	76 mm
Length	120 mm
Wrench size, union nut	37 mm

### Material specifications

Material Screw connection	Brass, nickel-plated
Seal material Cable seal	NBR
Housing material	die-cast aluminum
Housing surface material	Powder-coated, gray
Locking latch material	Stainless steel, handle: PA

### Mechanical properties

#### Mechanical data

Type of the screw connection	1x Pg29
Locking type	Latch

### Cable/line

External cable diameter Cable 1	18 mm ... 27 mm
---------------------------------	-----------------

### Connection data

External cable diameter	18 mm ... 27 mm
-------------------------	-----------------

# HC-B 24-TMQ-H-M1PG29G - Housing



1460257

<https://www.phoenixcontact.com/us/products/1460257>

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

# HC-B 24-TMQ-H-M1PG29G - Housing


1460257

<https://www.phoenixcontact.com/us/products/1460257>



## Drawings

Dimensional drawing

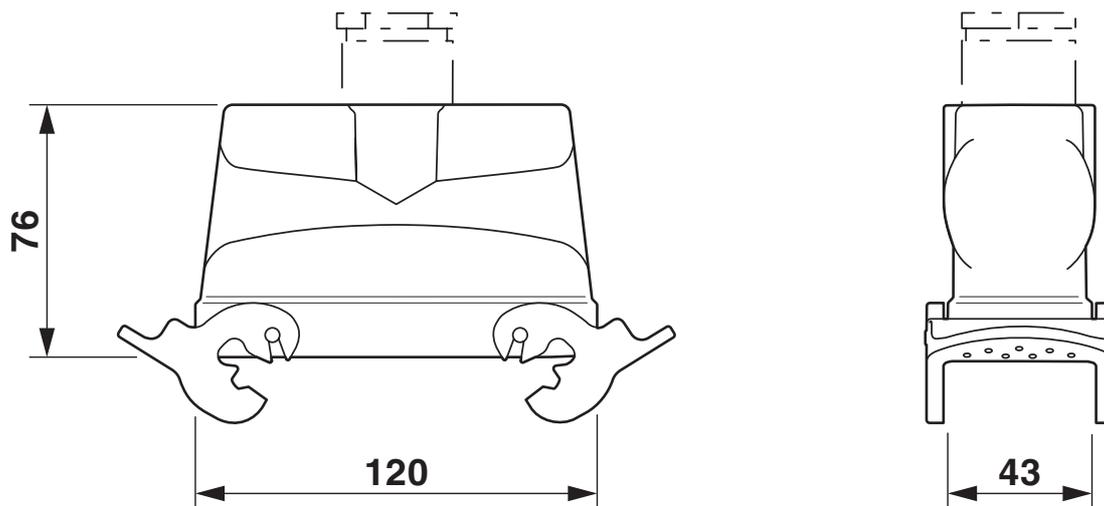

Dimensional drawing

# HC-B 24-TMQ-H-M1PG29G - Housing



1460257

<https://www.phoenixcontact.com/us/products/1460257>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-13.0	27440202

### UNSPSC

UNSPSC 21.0	31261501
-------------	----------

# HC-B 24-TMQ-H-M1PG29G - Housing



1460257

<https://www.phoenixcontact.com/us/products/1460257>

## Environmental product compliance

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)