

HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365

<https://www.phoenixcontact.com/us/products/1460365>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON ADVANCE B10 sleeve housing, with bayonet locking (Allen screw), salt water resistant aluminum, height: 100 mm, with 1 x M25 thread, straight cable outlet, without surface; conductive seal (EMC properties)

Commercial data

| | |
|--------------------------------------|--------------------|
| Item number | 1460365 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | BF58 |
| Product key | BF7AAA |
| Catalog page | Page 568 (PC-2011) |
| GTIN | 4046356592642 |
| Weight per piece (including packing) | 346.05 g |
| Weight per piece (excluding packing) | 346.05 g |
| Customs tariff number | 85389099 |
| Country of origin | DE |

HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365

<https://www.phoenixcontact.com/us/products/1460365>

Technical data


Notes

| | |
|---------|--|
| General | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
|---------|--|

Product properties

| | |
|------------------------------|------------------------------|
| Product type | Housing with bayonet locking |
| Housing type | Sleeve housing |
| Application | Offshore/EMC |
| Type | B10 |
| No. of cable outlets | 1 |
| Type of the screw connection | 1x M25 |
| Fixing screws | M6 |
| Shielded | yes |
| Cable outlet | straight |
| Pg screw connection | none |

Dimensions
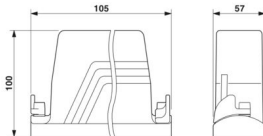
| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 57 mm |
| Height | 100 mm |
| Length | 105 mm |

Material specifications

| | |
|--------------------------|---|
| Seal material | NBR, conductive |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated |
| Locking latch material | Stainless steel |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|-------------------|
| Degree of protection | IP66 |
| | IP67 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

Mechanical properties

Mechanical data

| | |
|------------------------------|--------|
| Type of the screw connection | 1x M25 |
| Locking type | Screw |

HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365


<https://www.phoenixcontact.com/us/products/1460365>

Mounting

| | |
|---------------|---|
| Assembly note | If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding. |
| Fixing screws | M6 |


Drawings

Dimensional drawing

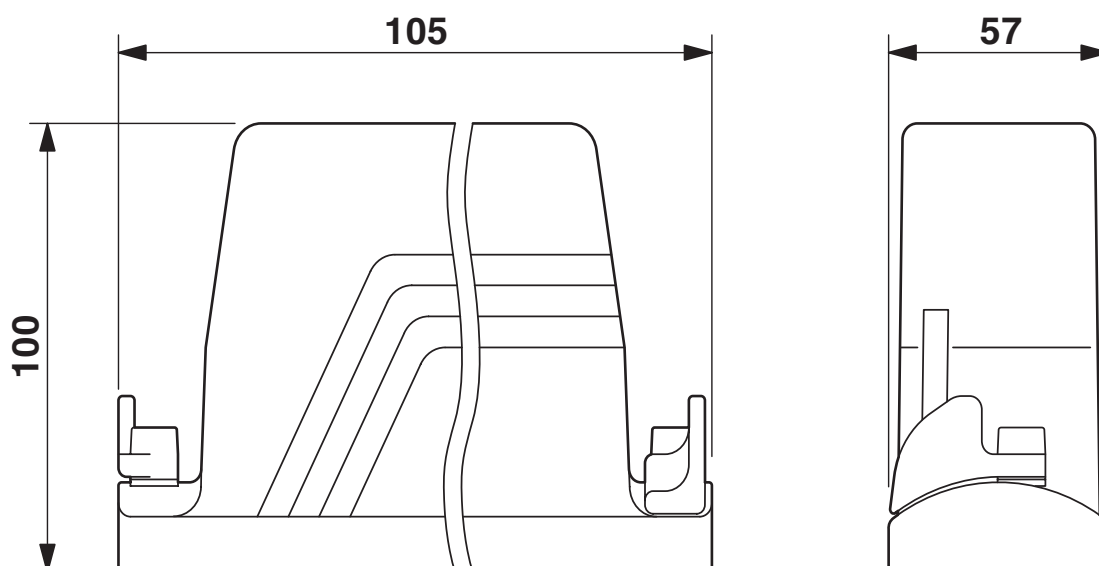

Dimensional drawing

Dimensional drawing

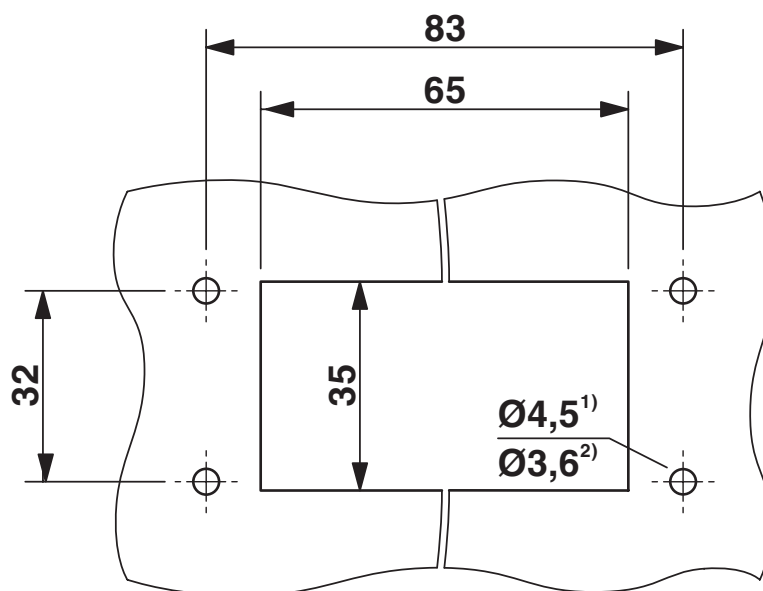

Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)


HC-B 10-TMB-100/O1STM25G-EEE - Housing




1460365


<https://www.phoenixcontact.com/us/products/1460365>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1460365>



EAC
Approval ID: RU C-DE.AI30.B.01102



EAC
Approval ID: RU C-DE.BL08.B.00511

HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365

<https://www.phoenixcontact.com/us/products/1460365>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365

<https://www.phoenixcontact.com/us/products/1460365>

Accessories

HC-B-BF - Panel-mount flange

1604641

<https://www.phoenixcontact.com/us/products/1604641>



Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking

HC-B-BF-SET - Panel-mount flange

1604654

<https://www.phoenixcontact.com/us/products/1604654>



Bayonet mounting flange set, consisting of 2 mounting flanges with 4 self-tapping Torx® head screws and 4 fan-type spacers

HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



G-INS-M25-M68N-PNES-GY - Cable gland

1411126

<https://www.phoenixcontact.com/us/products/1411126>



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver-grey RAL 7001

G-INS-M25-M68N-PNES-BK - Cable gland

1411134

<https://www.phoenixcontact.com/us/products/1411134>



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: jet black RAL 9005

HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



G-INS-M25-M68N-NNES-S - Cable gland

1411165

<https://www.phoenixcontact.com/us/products/1411165>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

HC-M-KV-M25(14-21) - Cable gland

1646007

<https://www.phoenixcontact.com/us/products/1646007>



Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M25

HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



G-INSEC-M25-S68N-NCRS-S - Cable gland

1411190

<https://www.phoenixcontact.com/us/products/1411190>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 11 mm ... 16 mm, shielding: yes, connecting thread: M25 x 1.5, color: silver, with O-ring

G-INESR-M25-M68N-NEPDS-S - Cable gland

1415193

<https://www.phoenixcontact.com/us/products/1415193>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 9 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with external strain relief, with O-ring

HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



HC-M-KV-T-M25 - Cable gland

1646191

<https://www.phoenixcontact.com/us/products/1646191>

Metal screw connection with cable bend protection and strain relief, thread length: 7 mm, cable sealing area: 10 - 19 mm, clamping area: 14 - 21 mm, SW 30, screw connection: M25



REDUC-M-KV-M25/M20 - Reducing adapter

1647624

<https://www.phoenixcontact.com/us/products/1647624>

Reducing adapter, connecting thread: M25 x 1.5, color: silver, with O-ring



HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



ENLAR-M-KV-M25/M32 - Extension adapter

1647679

<https://www.phoenixcontact.com/us/products/1647679>

Extension adapter, connecting thread: M25 x 1.5, color: silver, with O-ring



HC-M-BS-M25 - Screw plug

1645859

<https://www.phoenixcontact.com/us/products/1645859>

Screw plug, material for screw connection: Brass, nickel-plated, connecting thread: M25 x 1.5, color: silver



HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



WP-G HF IP66 M25 BK - Screw connection

3240899

<https://www.phoenixcontact.com/us/products/3240899>

Cable gland, metric thread, IP66 protection, straight



WP-G HF IP69K M25 BK - Screw connection

3240885

<https://www.phoenixcontact.com/us/products/3240885>

Cable gland, metric thread, IP68/69k protection, straight



HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



WP-GA HF IP66 M25 BK - Screw connection

3240927

<https://www.phoenixcontact.com/us/products/3240927>

Cable gland, metric thread, IP66 protection, angled



WP-GA HF IP69K M25 BK - Screw connection

3240913

<https://www.phoenixcontact.com/us/products/3240913>

Cable gland, metric thread, IP68/69k protection, angled



HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



WP-GR HF IP66 M25 BK - Screw connection

3240955

<https://www.phoenixcontact.com/us/products/3240955>



Cable gland, metric thread, IP66 protection, with strain relief

WP-GR HF IP69K M25 BK - Screw connection

3240941

<https://www.phoenixcontact.com/us/products/3240941>



Cable gland, metric thread, IP68/69k protection, with strain relief

HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



WP-G PP HF M25 - Screw connection

3240999

<https://www.phoenixcontact.com/us/products/3240999>

Cable gland made from PP with metric thread, IP65 protection



WP-GT PP HF M25 - Screw connection

3241013

<https://www.phoenixcontact.com/us/products/3241013>

Cable gland made from PP with metric thread, rotatable, IP54 protection



HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365

<https://www.phoenixcontact.com/us/products/1460365>

WP-G BRASS IP40 M25 - Screw connection

3241048

<https://www.phoenixcontact.com/us/products/3241048>

Cable gland made from brass with metric thread, IP40 protection



WP-GT BRASS M25 - Screw connection

3241034

<https://www.phoenixcontact.com/us/products/3241034>

Cable gland made from brass with metric thread, rotatable, IP40 protection



HC-B 10-TMB-100/O1STM25G-EEE - Housing



1460365

<https://www.phoenixcontact.com/us/products/1460365>

WP-G BRASS IP65 M25 - Screw connection

3241062

<https://www.phoenixcontact.com/us/products/3241062>



Cable gland made from brass with metric thread, IP65 protection

SF-BIT-HEXB 5-89 - Screw insert

1208911

<https://www.phoenixcontact.com/us/products/1208911>



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173

HC-B 10-TMB-100/O1STM25G-EEE - Housing

1460365

<https://www.phoenixcontact.com/us/products/1460365>



SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/us/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com