


1492-AIFMQS

Fusible 4-Input/4 Output Channel with 8 Fuses and 24V DC Blown Fuse Indicators

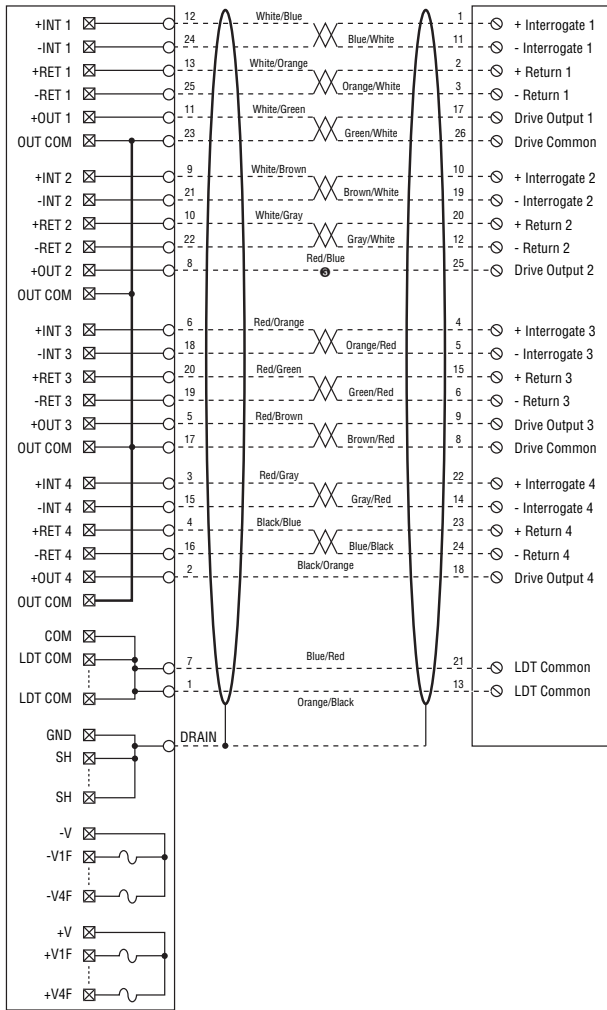

Cat. No.	Voltage Range	Max. Current (Per Circuit)	Max. Current (Per Module)	Dimensions (W x H x D) (in.)	Indicator Circuit Current	Max. Recurring Peak Voltage	Operating Temperature	Operating Humidity	Approx Shipping Weight	Replacement Label Card Cat. No.
1492-AIFMQS	10...30V DC	3 A	12 A	4.72 x 3.27 x 2.74	2 mA	600 Vp	0...60 C	5...95%	1.18 lb. 536 g.	W4600630901