




1492-P Push-in Terminal Blocks

[1492-P3Q](#)

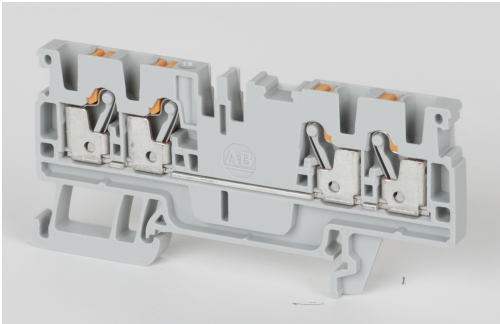

Representative Rendering, Not The Actual Product

1492-P Push-in Terminal Blocks , 2.5 mm² (AWG 28 - AWG 12),20 A , Feed-Through , Single Level ,2 Points On One Side, 2 Points On Other Side

Product Details

BASIC BLOCK FEATURES	
Wire Range (Rated Cross Section)	2.5 mm ² (AWG 28 - AWG 12)
UL/CSA Voltage Rating	600V AC/DC
UL/CSA Current Rating	20A
Width	5.1 mm
Electrical Standards/ Certifications	IEC / UL / CSA / ATEX / IECEx
Color	Grey
DETAIL DATA	
Block Type	Feed-Through
Circuit per Block	Single-Circuit
Connection Points	2 Points On One Side, 2 Points On Other Side
Number of Levels	Single Level
Wiring Diagram	1492-P3Q

Supporting Documentation and Downloads

- [Photo](#)
- [Wiring Diagram](#)
- [Installation Instructions](#)
- [Technical Details](#)