

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Data cable, 4-position, PUR/PVC, yellow, Plug straight M12, coding: A, on free cable end, cable length: 10 m

Commercial data

Item number	1502691
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF03
Product key	BF1CCA
GTIN	4017918816926
Weight per piece (including packing)	407.49 g
Weight per piece (excluding packing)	397.7 g
Customs tariff number	85444290
Country of origin	DE

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>

Technical data

Product properties

Product type	Data cable preassembled
Number of positions	4
Shielded	no

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Signaling

Status display	No
Status display present	No

Electrical properties

Nominal voltage U_N	250 V AC
	250 V DC
Nominal current I_N	4 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	------------

Material specifications

Flammability rating according to UL 94	HB
--	----

Connector

Connection 1

Type	Plug straight M12
Number of positions	4
Coding type	A (Standard)

Connection 2

Type	free cable end
------	----------------

Cable/line

Cable length	10 m
--------------	------


PUR/PVC yellow [140]

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>

Dimensional drawing	
Cable weight	39 kg/km
UL AWM Style	20549
Number of positions	4
Shielded	no
Cable type	PUR/PVC yellow [140]
Conductor structure signal line	42x 0.10 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm ² (Signal line)
Wire diameter incl. insulation	1.5 mm ±0.05 mm
External cable diameter	5.20 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	yellow
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	brown, white, blue, black
Thickness, insulation	approx. 0.30 mm (Core insulation) ≥ 0.38 mm (Outer cable sheath) approx. 0.35 mm (Inner sheath)
Overall twist	4 wires, twisted
Max. conductor resistance	max. 58 Ω/km (at 20 °C)
Insulation resistance	≥ 1 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 3000 V
Smallest bending radius, fixed installation	52 mm
Smallest bending radius, movable installation	52 mm
Max. bending cycles	2000000
Flame resistance	in accordance with DIN UL-Style 20549
Ambient temperature (operation)	-25 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP68

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>

Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-25 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>


Drawings

Dimensional drawing



Plug, M12 x 1, straight, shielded

Circuit diagram

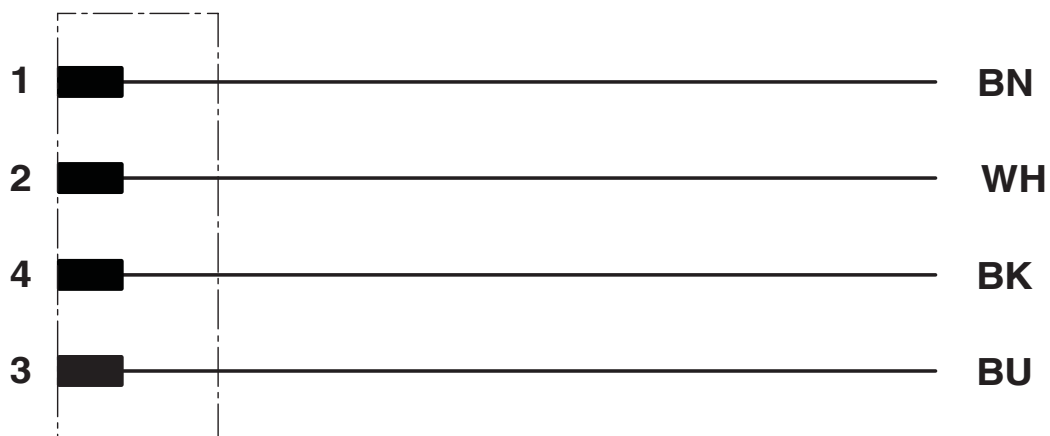

Schematic diagram



Pin assignment M12 plug, 4-pos., A-coded, view plug side

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1502691>

	UL Listed Approval ID: FILE E 221474			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	300 V	4 A	-	-

	cUL Listed Approval ID: FILE E 221474			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	300 V	4 A	-	-

	EAC-RoHS Approval ID: RU D-DE.HB35.B.00387			

cULus Listed				
---------------------	--	--	--	--

SAC-4P-M12MS/10,0-140 - Data cable



1502691

<https://www.phoenixcontact.com/us/products/1502691>

Classifications

ECLASS

ECLASS-11.0	27060307
ECLASS-12.0	27060307
ECLASS-13.0	27060307

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-4P-M12MS/10,0-140 - Data cable



1502691
<https://www.phoenixcontact.com/us/products/1502691>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com