

1507308  
<https://www.phoenixcontact.com/us/products/1507308>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bus system cable, PROFIBUS (12 Mbps), 2-position, PUR halogen-free, red lilac RAL 4001, shielded, free cable end, on Socket straight M12, coding: B, cable length: 5 m

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1507308             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF04                |
| Product key                          | BF1CKC              |
| Catalog page                         | Page 429 (C-2-2019) |
| GTIN                                 | 4017918900137       |
| Weight per piece (including packing) | 316.6 g             |
| Weight per piece (excluding packing) | 303.5 g             |
| Customs tariff number                | 85444290            |
| Country of origin                    | PL                  |

# SAC-2P- 5,0-910/M12FSB - Bus system cable



1507308

<https://www.phoenixcontact.com/us/products/1507308>

## Technical data

### Notes

|         |                                                                                      |
|---------|--------------------------------------------------------------------------------------|
| General | Further products with variable cable lengths can be found in the accessories section |
|---------|--------------------------------------------------------------------------------------|

### Product properties

|                      |                         |
|----------------------|-------------------------|
| Product type         | Data cable preassembled |
| Application          | Standard                |
| Sensor type          | PROFIBUS                |
| Number of positions  | 2                       |
| No. of cable outlets | 1                       |
| Shielded             | yes                     |
| Coding               | B                       |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Interfaces

|                      |                                |
|----------------------|--------------------------------|
| Bus system           | PROFIBUS                       |
| Signal type/category | PROFIBUS, 12 Mbps (max. 100 m) |

### Signaling

|                        |    |
|------------------------|----|
| Status display         | no |
| Status display present | No |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 48 V AC                    |
|                       | 60 V DC                    |
| Nominal current $I_N$ | 4 A                        |
| Transmission medium   | Copper                     |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Material specifications

|                          |                                             |
|--------------------------|---------------------------------------------|
| Seal material            | NBR                                         |
| Material of grip body    | TPU, hardly inflammable, self-extinguishing |
| Contact material         | CuSn                                        |
| Contact surface material | Ni/Au                                       |
| Contact carrier material | TPU GF                                      |

# SAC-2P- 5,0-910/M12FSB - Bus system cable



1507308

<https://www.phoenixcontact.com/us/products/1507308>

|                               |                              |
|-------------------------------|------------------------------|
| Material for screw connection | Zinc die-cast, nickel-plated |
|-------------------------------|------------------------------|

## Connection data

### Pin assignment

|                                                           |                           |
|-----------------------------------------------------------|---------------------------|
| Contact   Color (signal designation)   Contact (optional) | 2 (Socket)   GN (A cable) |
|                                                           | 4 (Socket)   RD (B cable) |

## Connector

### Connection 1

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|


### Connection 2

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|

## Cable/line

|              |     |
|--------------|-----|
| Cable length | 5 m |
|--------------|-----|

### PROFIBUS [910]

|                                 |                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing             |  |
| Cable weight                    | 90 kg/km                                                                             |
| UL AWM Style                    | 21198 (80°C/300 V)                                                                   |
| Number of positions             | 2                                                                                    |
| Shielded                        | yes                                                                                  |
| Cable type                      | PROFIBUS [910]                                                                       |
| Conductor structure             | 1x2xAWG24/19                                                                         |
| Conductor structure signal line | 19x 0.13 mm                                                                          |
| AWG signal line                 | 24                                                                                   |
| Conductor cross section         | 2x 0.25 mm² (Signal line)                                                            |
| Wire diameter incl. insulation  | 2.55 mm ±0.07 mm                                                                     |
| External cable diameter         | 7.80 mm ±0.2 mm                                                                      |
| Outer sheath, material          | PUR                                                                                  |
| External sheath, color          | red lilac RAL 4001                                                                   |
| Conductor material              | Tin-plated Cu litz wires                                                             |
| Material, filler                | PP                                                                                   |
| Material wire insulation        | Foam-Skin PP                                                                         |
| Single wire, color              | red, green                                                                           |
| Overall twist                   | 2 cores with 2 fillers to the core                                                   |

# SAC-2P- 5,0-910/M12FSB - Bus system cable



1507308

<https://www.phoenixcontact.com/us/products/1507308>

|                                               |                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optical shield covering                       | 85 %                                                                                                                                                                                                                                                                                                                                                                  |
| Max. conductor resistance                     | $\leq 78.6 \Omega/\text{km}$                                                                                                                                                                                                                                                                                                                                          |
| Insulation resistance                         | $\geq 5 \text{ G}\Omega \cdot \text{km}$                                                                                                                                                                                                                                                                                                                              |
| Wave impedance                                | $150 \Omega \pm 10 \%$ (3 MHz ... 20 MHz)                                                                                                                                                                                                                                                                                                                             |
| Cable capacity                                | nom. 30 pF/m                                                                                                                                                                                                                                                                                                                                                          |
| Nominal voltage, cable                        | 300 V                                                                                                                                                                                                                                                                                                                                                                 |
| Test voltage Core/Core                        | 1500 V (50 Hz, 1 min.)                                                                                                                                                                                                                                                                                                                                                |
| Test voltage Core/Shield                      | 1500.00 V (50 Hz, 1 min.)                                                                                                                                                                                                                                                                                                                                             |
| Smallest bending radius, fixed installation   | 40 mm                                                                                                                                                                                                                                                                                                                                                                 |
| Smallest bending radius, movable installation | 65 mm                                                                                                                                                                                                                                                                                                                                                                 |
| Dynamic load capacity (bending)               | <p>Max. bending cycles: 4000000, Bending radius: 65 mm, Traversing path: 4.5 m, Traversing rate: 3 m/s, Acceleration: 3 m/s<sup>2</sup>, Ambient temperature: -20 °C ... 60 °C</p> <p>Max. bending cycles: 5000000, Bending radius: 80 mm, Traversing path: 4.5 m, Traversing rate: 3 m/s, Acceleration: 3 m/s<sup>2</sup>, Ambient temperature: -20 °C ... 60 °C</p> |
| Shield attenuation                            | $\leq 0.049 \text{ dB/m}$ (at 16 MHz)                                                                                                                                                                                                                                                                                                                                 |
| Halogen-free                                  | <p>in accordance with DIN VDE 0472 part 815</p> <p>according to IEC 60754-1</p>                                                                                                                                                                                                                                                                                       |
| Flame resistance                              | <p>UL 1581, Section 1060 and UL 2556, Section 9.3 (FT1)</p> <p>UL 1581, Section 1100 and UL 2556, Section 9.1 (HFT/FT2)</p> <p>IEC 60332-1-2</p>                                                                                                                                                                                                                      |
| Other resistance                              | Low adhesion                                                                                                                                                                                                                                                                                                                                                          |
| Ambient temperature (operation)               | <p>-40 °C ... 80 °C (cable, fixed installation)</p> <p>-30 °C ... 70 °C (Cable, flexible installation)</p> <p>-20 °C ... 60 °C (for installation)</p> <p>-20 °C ... 60 °C (cable, drag chain applications)</p>                                                                                                                                                        |


## Environmental and real-life conditions

### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |


## Drawings

Schematic diagram

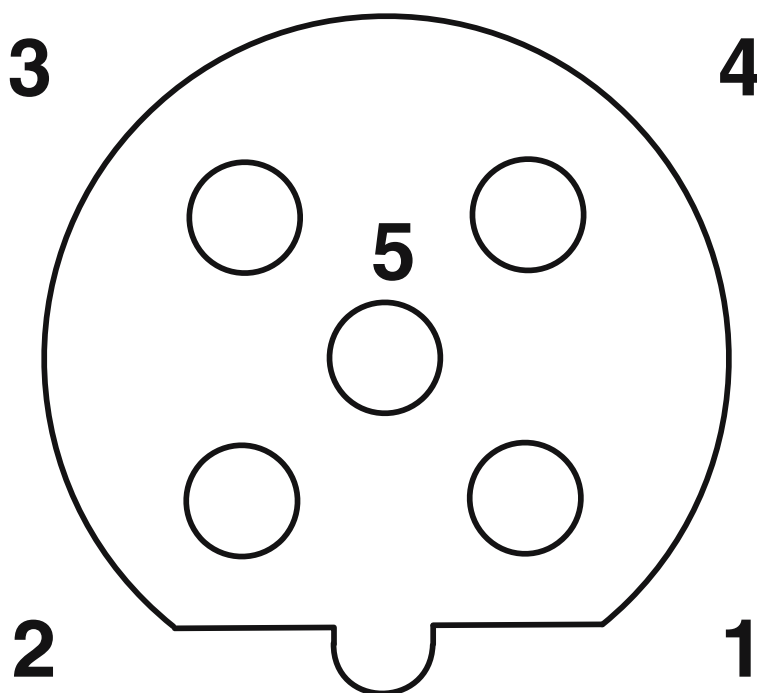

Pin assignment M12 socket, 5-pos., B-coded, female side

Circuit diagram

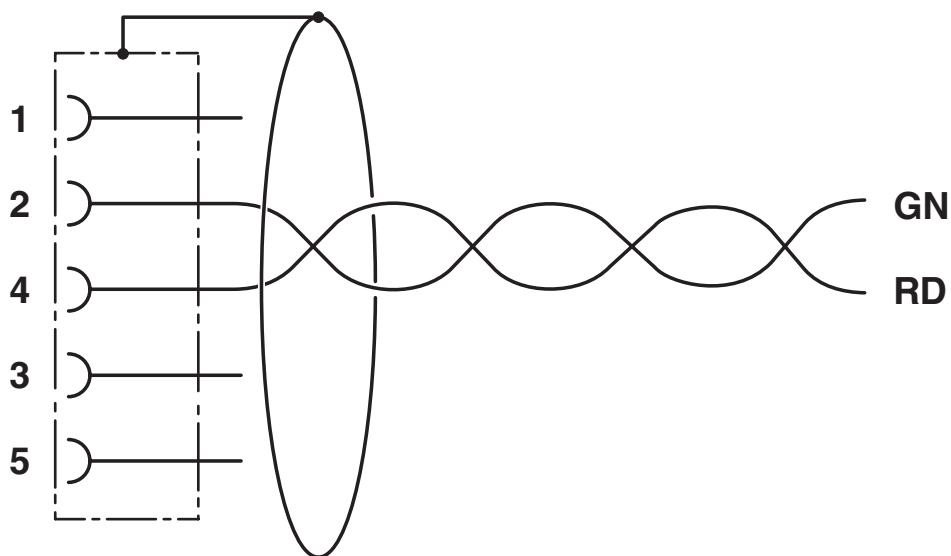


# SAC-2P- 5,0-910/M12FSB - Bus system cable

1507308

<https://www.phoenixcontact.com/us/products/1507308>



Dimensional drawing

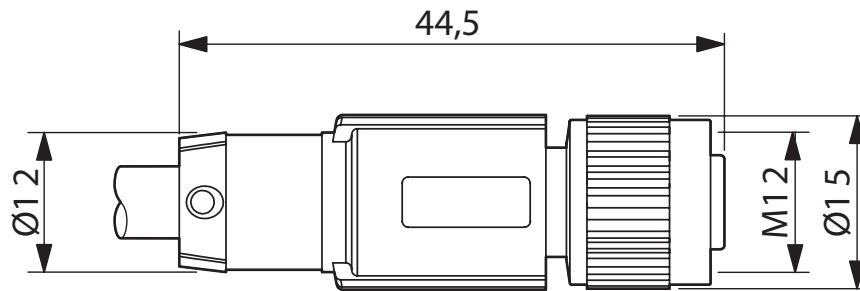

M12 x 1 socket, straight, shielded

# SAC-2P- 5,0-910/M12FSB - Bus system cable



1507308

<https://www.phoenixcontact.com/us/products/1507308>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1507308>

|                                                                                                                                  |                                |                                |                   |                               |
|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
|  <b>UL Listed</b><br>Approval ID: FILE E 221474 |                                |                                |                   |                               |
|                                                                                                                                  | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|                                                                                                                                  | 300 V                          | 4 A                            | -                 | -                             |

|                                                                                                                                   |                                |                                |                   |                               |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
|  <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                                |                                |                   |                               |
|                                                                                                                                   | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|                                                                                                                                   | 300 V                          | 4 A                            | -                 | -                             |

|                                                                                                                                         |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|  <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| <b>cULus Listed</b> |  |  |  |  |
|---------------------|--|--|--|--|

# SAC-2P- 5,0-910/M12FSB - Bus system cable



1507308

<https://www.phoenixcontact.com/us/products/1507308>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060307 |
| ECLASS-12.0 | 27060307 |
| ECLASS-13.0 | 27060307 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-2P- 5,0-910/M12FSB - Bus system cable



1507308

<https://www.phoenixcontact.com/us/products/1507308>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)