

1522299

<https://www.phoenixcontact.com/us/products/1522299>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 6-position, PUR halogen-free, black-gray RAL 7021, shielded, Plug straight M8, coding: A, on free cable end, cable length: 1.5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1522299 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF01 |
| Product key | BF1BNA |
| Catalog page | Page 206 (C-2-2019) |
| GTIN | 4046356021067 |
| Weight per piece (including packing) | 66 g |
| Weight per piece (excluding packing) | 63.9 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable



1522299

<https://www.phoenixcontact.com/us/products/1522299>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Application | Standard |
| Number of positions | 6 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|--|----------------------------|
| Rated voltage in acc. with IEC 61076-2-101 | 30 V |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 30 V AC |
| | 30 V DC |
| Nominal current I_N | 1.5 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

Connector

Connection 1

SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable



1522299

<https://www.phoenixcontact.com/us/products/1522299>

| | |
|---------------------|------------------|
| Type | Plug straight M8 |
| Number of positions | 6 |
| Coding type | A |


Connection 2

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Cable/line

| | |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

PUR halogen-free black [PUR]

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 34 kg/km |
| Number of positions | 6 |
| Shielded | yes |
| Cable type | PUR halogen-free black [PUR] |
| Conductor structure signal line | 18x 0.10 mm |
| AWG signal line | 26 |
| Conductor cross section | 6x 0.14 mm ² (Signal line) |
| Wire diameter incl. insulation | 1.05 mm ±0.02 mm |
| External cable diameter | 5.20 mm |
| | 5.20 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Single wire, color | brown, white, black, blue, gray, pink |
| Smallest bending radius, fixed installation | 52 mm |
| Smallest bending radius, movable installation | 52 mm |
| Max. bending cycles | 4000000 |
| Bending radius | 52 mm |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |
| Acceleration | 10 m/s ² |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| Flame resistance | in accordance with DIN UL-Style 20549 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Other resistance | Highly resistant to acids, alkaline solutions and solvents |
| | hydrolysis and microbe resistant |

SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable



1522299

<https://www.phoenixcontact.com/us/products/1522299>

| | |
|---------------------------------|---|
| Special properties | partly UV-resistant (in accordance with DIN EN ISO 4892-2-A) |
| | Flexible cable conduit capable |
| | Silicone-free |
| | Free of substances which would hinder coating with paint or varnish |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -25 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |


Standards and regulations

M8

| | |
|--------------------------|-----------------|
| Standard designation | M8 connector |
| Standards/specifications | IEC 61076-2-104 |


Drawings

Schematic diagram

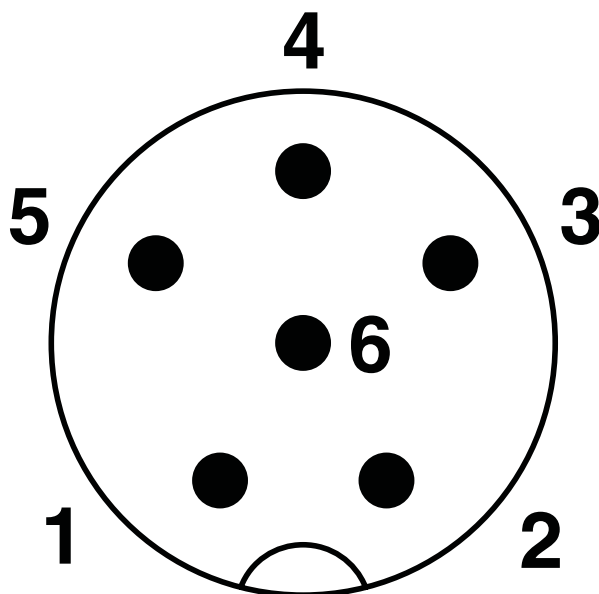

Pin assignment M8 plug, 6-pos., view male side

Circuit diagram

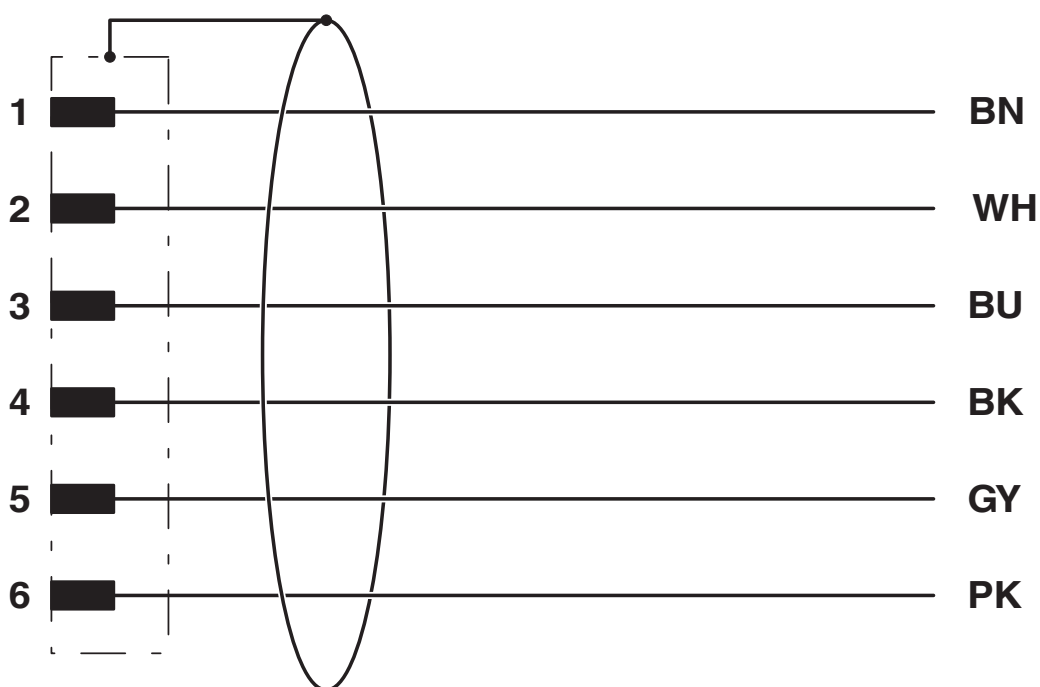


SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable

1522299

<https://www.phoenixcontact.com/us/products/1522299>



Dimensional drawing

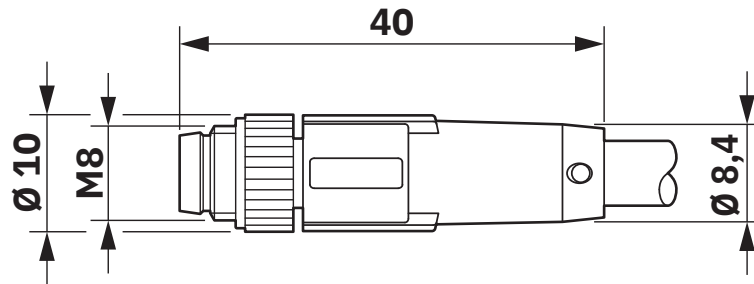

Plug M8 x 1, straight, shielded

SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable



1522299

<https://www.phoenixcontact.com/us/products/1522299>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1522299>

| | | | | |
|--|--|-----------------------|-------------------|-----------------------------|
| | UL Listed Approval ID: FILE E 221474 | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 30 V | 1.5 A | - | - |

| | | | | |
|--|---|-----------------------|-------------------|-----------------------------|
| | cUL Listed Approval ID: FILE E 221474 | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 30 V | 1.5 A | - | - |

| | | | | |
|--|--|--|--|--|
| | EAC-RoHS Approval ID: RU D-DE.HB35.B.00387 | | | |
| | | | | |

| | | | | |
|---------------------|--|--|--|--|
| cULus Listed | | | | |
|---------------------|--|--|--|--|

SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable



1522299

<https://www.phoenixcontact.com/us/products/1522299>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-6P-M 8MS/ 1,5-PUR SH - Sensor/actuator cable



1522299

<https://www.phoenixcontact.com/us/products/1522299>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com