

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable



1530388

<https://www.phoenixcontact.com/us/products/1530388>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PUR, black RAL 9005, Plug angled M5, coding: A, on free cable end

Your advantages

- Easy and safe: 100 % electrically tested plug-in components

Commercial data

Item number	1530388
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	B06
Product key	BF1ACA
Catalog page	Page 190 (C-2-2017)
GTIN	4046356024181
Weight per piece (including packing)	31.3 g
Weight per piece (excluding packing)	30.46 g
Customs tariff number	85444290
Country of origin	DE

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable



1530388

<https://www.phoenixcontact.com/us/products/1530388>

Technical data

Product properties

Product type	Sensor/actuator cable
Number of positions	4
Application	Standard
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Material of grip body	PUR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PUR
Material for screw connection	Brass, nickel-plated

Electrical properties

Insulation resistance	$\geq 10 \text{ G}\Omega$
Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	1 A
Test voltage	1750 V
Protective circuit	unwired

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	------------

Signaling

Status display	No
Status display present	No

Connector

Connection 1

Type	Plug angled M5
Number of positions	4
Coding type	A

Connection 2

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable




1530388

<https://www.phoenixcontact.com/us/products/1530388>

Type	free cable end
------	----------------

Cable/line

PUR/PVC black [350]

Dimensional drawing	
Number of positions	4
Shielded	no
Cable type	PUR/PVC black [350]
Conductor structure signal line	18x 0.10 mm
AWG signal line	26
Conductor cross section	4x 0.14 mm ² (Signal line)
Wire diameter incl. insulation	0.92 mm ±0.02 mm
External cable diameter	3.50 mm ±0.1 mm
Outer sheath, material	PUR
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	brown, white, blue, black
Overall twist	4 wires, twisted
Max. conductor resistance	148 Ω/km
Insulation resistance	100 MΩ*km
Nominal voltage, cable	100 V
Test voltage	800 V _{rms}
Smallest bending radius, fixed installation	9 mm
Smallest bending radius, movable installation	18 mm
Ambient temperature (operation)	-15 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65 IP67 IP68
Ambient temperature (operation)	-25 °C ... 80 °C (Plug / socket)

Standards and regulations

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable



1530388

<https://www.phoenixcontact.com/us/products/1530388>

Standard designation	M5 connector
Standards/specifications	IEC 61076-2-105

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable


1530388

<https://www.phoenixcontact.com/us/products/1530388>




Drawings

Schematic diagram

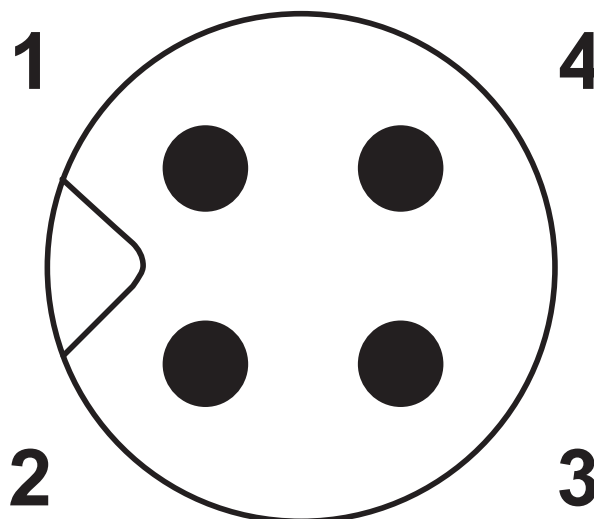

Plug M5, 4-pos.

Circuit diagram

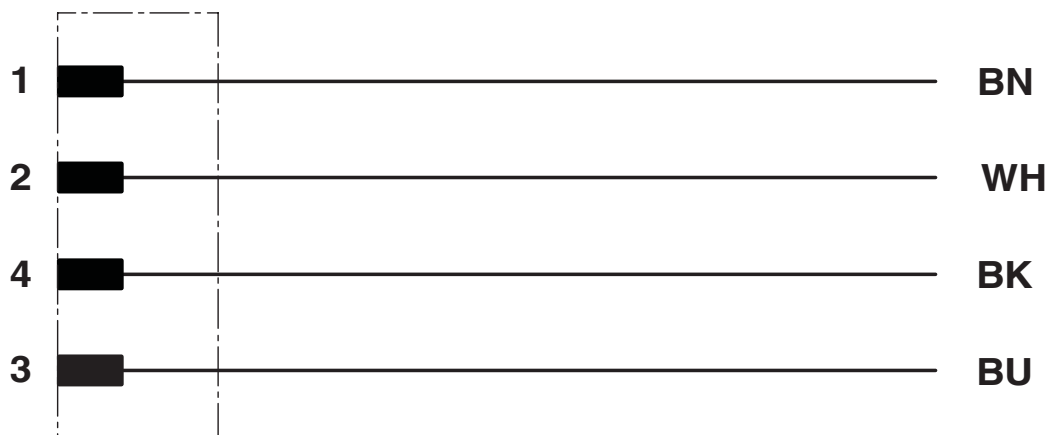


SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable

1530388

<https://www.phoenixcontact.com/us/products/1530388>




Dimensional drawing

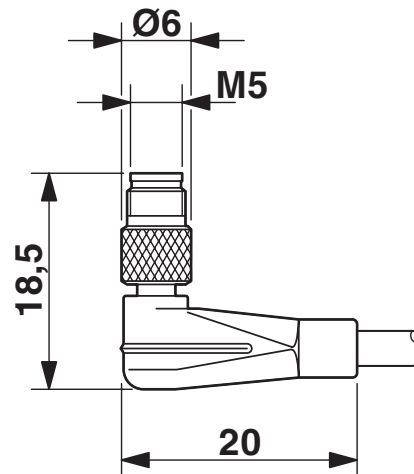

Plug M5 x 0.5, angled

Schematic diagram

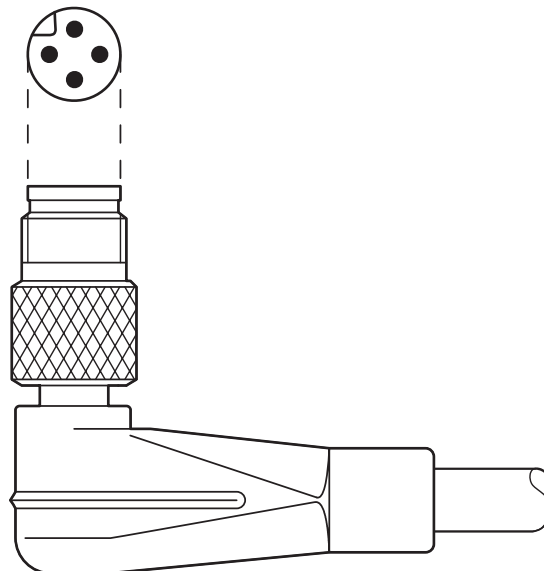

Layout of connector pin assignments

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable



1530388

<https://www.phoenixcontact.com/us/products/1530388>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-13.0	27060311

SAC-4P-M5MR/ 1,5-PUR - Sensor/actuator cable



1530388

<https://www.phoenixcontact.com/us/products/1530388>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com