

#### 1551820

https://www.phoenixcontact.com/us/products/1551820

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, Pin, straight, M12-SPEEDCON, coding: A, Rear mounting, M12 x 1, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239994

## Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · SPEEDCON fast locking system reduces cabling times

## Commercial data

Item number	1551820		
Packing unit	20 pc		
Minimum order quantity	20 pc		
Sales key	AB26		
Product key	ABQEGI		
Catalog page	Page 248 (C-2-2013)		
GTIN	4046356161886		
Weight per piece (including packing)	8.243 g		
Weight per piece (excluding packing)	7.7 g		
Customs tariff number	85366990		
Country of origin	DE		



#### 1551820

https://www.phoenixcontact.com/us/products/1551820

## Technical data

#### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

### Mounting

Mounting type	Rear mounting M12 x 1 With flat nut	
Assembly note	With flat nut	

## **Product properties**

Product type	Circular connectors (device side)
Number of positions	4
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	
Overvoltage category	II
Degree of pollution	3

#### Material specifications

Flammability rating according to UL 94	VO
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

#### **Electrical properties**

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	250 V
Nominal current I <sub>N</sub>	4 A

### Connection data

Conductor connection	
Connection method	Solder pins



#### 1551820

https://www.phoenixcontact.com/us/products/1551820

Contact connection type	Pin		
Tightening torque	3 Nm 4 Nm (Installation-side)		
echanical properties			
Mechanical data			
Insertion/withdrawal cycles	> 100		
onnector			
Connection 4			
Connection 1	-		
Head design	Pin		
Head cable outlet	straight		
Head thread type	M12		
	SPEEDCON		
Head locking type	SFEEDCON		
Coding	A A		
Coding			

#### Environmental and real-life conditions

Ambient conditions				
Degree of protection	IP67 (When plugged in)			
	IP65 (When plugged in)			
	IP65/IP67			
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)			
	-40 °C 85 °C (without mechanical actuation)			
	-25 °C 85 °C (Cable, flexible installation)			
	-40 °C 85 °C (cable, fixed installation)			

### Standards and regulations

M12

Standard designation	M12 connector	
Standards/specifications	IEC 61076-2-101	




1551820

https://www.phoenixcontact.com/us/products/1551820

Drawings

Schematic diagram

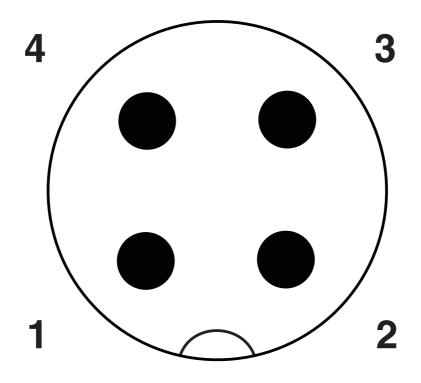

Pin assignment M12 plug, 4-pos., A-coded, view plug side



1551820

https://www.phoenixcontact.com/us/products/1551820

## Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1551820

UL Recognized   Approval ID: E118976-20100522						
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>		
	250 V	4 A	22 - 22	-		

6 <b>91</b> .05	CULus Recognized Approval ID: E221474-20140616					
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>	
		250 V	4 A	22 - 20	-	



#### 1551820

https://www.phoenixcontact.com/us/products/1551820

## Classifications

### ECLASS

	ECLASS-11.0	27440102	
	ECLASS-12.0	27440116	
	ECLASS-13.0	27440116	
ETIM			
	ETIM 9.0	EC002635	
UNSPSC			
	UNSPSC 21.0	39121400	



#### 1551820

https://www.phoenixcontact.com/us/products/1551820

## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
nvironment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	ca2b28b6-94d6-4520-909b-33807bca645f



1551820

https://www.phoenixcontact.com/us/products/1551820

Accessories

PROT-M12 FS - Sealing cap

1560251 https://www.phoenixcontact.com/us/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

#### PROT-M12 FS-M - Sealing cap

1430488 https://www.phoenixcontact.com/us/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com