

1552308

https://www.phoenixcontact.com/pc/products/1552308

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, Pin, straight, M12-SPEEDCON, coding: D, Rear mounting, Pg9, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240013

Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · SPEEDCON fast locking system reduces cabling times

Commercial data

Item number 1552308	
Packing unit	20 pc
Minimum order quantity	20 pc
Product key	ABQEGL
Catalog page	Page 246 (C-2-2013)
GTIN	4046356162159
Weight per piece (including packing)	13.9 g
Weight per piece (excluding packing)	10.4 g
Customs tariff number	85366990
Country of origin	DE



1552308

https://www.phoenixcontact.com/pc/products/1552308

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

Mounting

Mounting type	Rear mounting Pg9 With flat nut
Assembly note	With flat nut

Product properties

Product type	Circular connectors (device side)
Number of positions	4
Shielded	no
Coding	D
Thread type	M12
Insulation characteristics Overvoltage category	П
Degree of pollution	3
Data management status	
Article revision	07

Dimensions

Length of the solder pin	12 mm
	12 mm

Material specifications

Flammability rating according to UL 94 V0	
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ



1552308

https://www.phoenixcontact.com/pc/products/1552308

New Sector 1	050.)/
Nominal voltage U _N	250 V
Nominal current I _N	4 A
Connection data	
Conductor connection	
Connection method	Solder pins
Contact connection type	Pin
Tightening torque	2 Nm 3 Nm
Mechanical properties	
Mechanical data	
Insertion/withdrawal cycles	> 100
Connector	
Connection 1	
Head design	Pin
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	D
Cable/line	
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)
Environmental and real-life conditions	
Ambient conditions	
Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)
Standards and regulations	

M12


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101



1552308

https://www.phoenixcontact.com/pc/products/1552308

Drawings

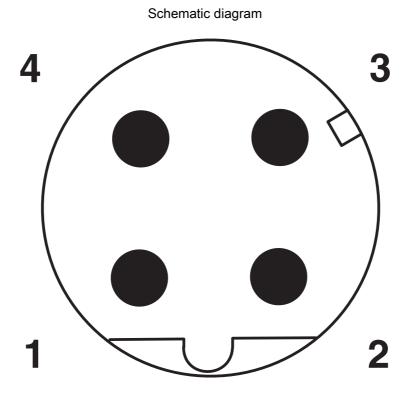

Pin assignment M12 male connector, 4-pos., D-coded, male side



1552308

https://www.phoenixcontact.com/pc/products/1552308

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1552308

Approval ID: E11897	6-20100522			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	250 V	4 A	22 - 22	-

c 91 .us	cULus Recogniz Approval ID: E221474	zed 4-20140616			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	-	-

SACC-DSI-MSD-4CON-L180/12 SCO - Device

connector rear mounting



1552308

https://www.phoenixcontact.com/pc/products/1552308

Classifications

ECLASS	
ECLASS-13.0	27440109
ETIM	
ETIM 9.0	EC002635
UNSPSC	
UNSPSC 21.0	39121400



1552308

https://www.phoenixcontact.com/pc/products/1552308

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	83104c50-a04b-4b6b-9306-fcdff8cc5f7e

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com