

1554555

https://www.phoenixcontact.com/pc/products/1554555

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 4-position, Pin, straight, M12-Standard, coding: A, on free cable end, Front mounting, Pg9, Individual wires, cable length: 0.5 m, 0.34 mm<sup>2</sup>, TPE litz wire

### Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · For high transmission safety: shield connection to the housing with optional EMC nut

### Commercial data

Item number	1554555
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABQCUE
Catalog page	Page 268 (C-2-2013)
GTIN	4046356170307
Weight per piece (including packing)	29.9 g
Weight per piece (excluding packing)	20.2 g
Customs tariff number	85366990
Country of origin	DE



1554555

https://www.phoenixcontact.com/pc/products/1554555

## Technical data

### Notes

General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Contact connection method: Crimp connection
afety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	WARNING: Only electrically qualified personnel may install an operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicate that only personnel familiar with electrical engineering are allowed to install and operate the product.
	• The products are suitable for applications in plant, controller, and electrical device engineering.
	<ul> <li>When operating the connectors in outdoor applications, they must be separately protected against environmental influences</li> </ul>
	<ul> <li>Assembled products may not be manipulated or improperly opened.</li> </ul>
	<ul> <li>Only use mating connectors that are specified in the technica data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).</li> </ul>
	When using the product in direct connection with third-party manufacturers, the user is responsible.
	<ul> <li>For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>
	<ul> <li>Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
	Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product
	Only use tools recommended by Phoenix Contact
	<ul> <li>Use a protective cap to protect connectors that are not in use The suitable accessories are available online in the accessory</li> </ul>



#### 1554555

https://www.phoenixcontact.com/pc/products/1554555

section of the product at phoenixcontact.com/products

• Ensure that the protective or functional ground has been properly connected.

 $\bullet$  VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

#### Mounting

Mounting type Front mounting Pg9
----------------------------------

### **Product properties**

Product type	Circular connectors (device side)		
Sensor type	Universal		
Number of positions	4		
Application	Signal		
No. of cable outlets	1		
Shielded	no		
Coding	A		
Thread type	M12		
Insulation characteristics			
Overvoltage category	П		

## Material specifications

Degree of pollution

Material	Stainless steel
Flammability rating according to UL 94	VO
Seal material	FKM
Contact material	Cu alloy
Contact surface material	Au
Contact carrier material	PA 66 GF
Material for screw connection	Stainless steel
Conductor material	Tin-plated Cu litz wires

3

### **Electrical properties**

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	> 100 MΩ
Nominal voltage U <sub>N</sub>	250 V (AC)
	250 V (DC)
Nominal current I <sub>N</sub>	4 A



#### 1554555

https://www.phoenixcontact.com/pc/products/1554555

Max. conductor resistance	57.6 Ω/km		
onnection data			
Conductor connection			
Connection method	Individual wires Pin		
Contact connection type			
Conductor cross section	0.34 mm <sup>2</sup>		
Tightening torque	2 Nm 3 Nm (Installation-side)		
echanical properties			
Mechanical data			
Insertion/withdrawal cycles	> 100		
onnector			
Connection 1			
Head design	Pin		
Head cable outlet	straight		
Head thread type	M12		
Head locking type	Standard		
Coding	А		
Connection 2			
Head design	free cable end		
i leau design			
able/line			
Cable length	0.5 m		
Cable type	TPE litz wire		
Signal type/category	Universal		
Wire diameter incl. insulation	1.2 mm ±0.07 mm		
Single wire, color	brown, white, blue, black		
Cable cross section	0.34 mm <sup>2</sup>		
Conductor material	Tin-plated Cu litz wires		
Conductor structure signal line	7x 0.25 mm		
AWG signal line	22		
Material wire insulation	TPE		
Thickness, insulation	0.21 mm (Core insulation)		
Nominal voltage, cable	300 V		
Test voltage, cable	2000 V AC		
Cable resistance	≤ 57.6 Ω/km		
Cable insulation resistance	≥ 20 MΩ*km		
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)		
	-25 °C 85 °C (Cable, flexible installation)		



#### 1554555

https://www.phoenixcontact.com/pc/products/1554555

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP65/IP67/IP69/IP69K	
	IP65/IP67/IP69K	
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)	
	-40 °C 85 °C (without mechanical actuation)	
	-25 °C 85 °C (Cable, flexible installation)	
	-40 °C 85 °C (cable, fixed installation)	

### Standards and regulations


M12			
Standard designation	M12 connector		
Standards/specifications	IEC 61076-2-101		



1554555

https://www.phoenixcontact.com/pc/products/1554555

## Drawings

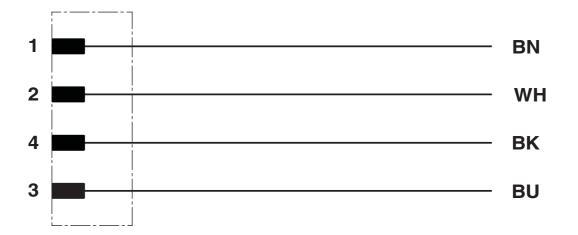


Circuit diagram




1554555

https://www.phoenixcontact.com/pc/products/1554555

Schematic diagram

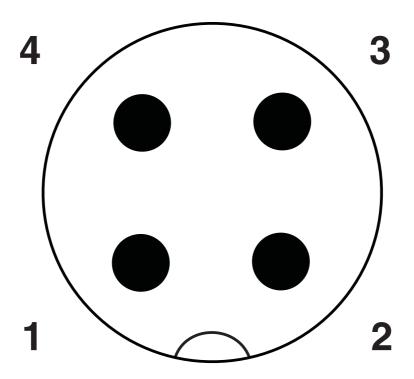

Pin assignment M12 plug, 4-pos., A-coded, view plug side

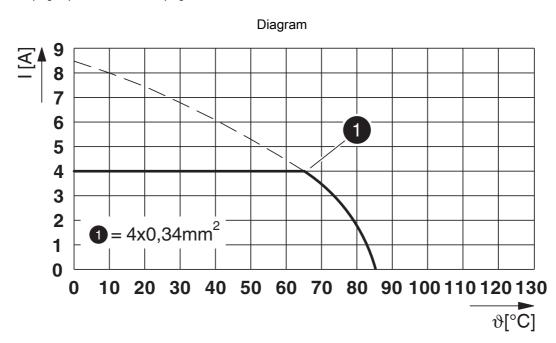



1554555

https://www.phoenixcontact.com/pc/products/1554555

## Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1554555

	<b>CUL Recognized</b> Approval ID: E118976-20	100522			
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		250 V	4 A	22 - 22	-
	UL Recognized Approval ID: E118976-20	100522			
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		250 V	4 A	22 - 22	-
c <b>911</b> us	<b>CULus Recogniz</b> Approval ID: E221474				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		250 V	4 A	22 - 20	-

cULus Recognized



1554555

https://www.phoenixcontact.com/pc/products/1554555

## Classifications

### ECLASS

	ECLASS-11.0	27440102			
	ECLASS-12.0	27440116			
	ECLASS-13.0	27440116			
ET	ETIM				
	ETIM 9.0	EC002635			
UNSPSC					
	UNSPSC 21.0	39121400			



1554555

https://www.phoenixcontact.com/pc/products/1554555

### Environmental product compliance

China RoHS

Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com