

1554623

https://www.phoenixcontact.com/us/products/1554623

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 5-position, Pin, straight, M12-Standard, coding: A, on free cable end, Front mounting, Pg9, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire

## Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut

### Commercial data

Item number	1554623
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCUE
Catalog page	Page 268 (C-2-2013)
GTIN	4046356170338
Weight per piece (including packing)	39.5 g
Weight per piece (excluding packing)	26.1 g
Customs tariff number	85444290
Country of origin	DE



1554623

https://www.phoenixcontact.com/us/products/1554623

#### Technical data

#### **Notes**

	nces arising from litz wires, cables or PCB assembly must e taken into consideration.
Order information: Lock n	nut is included in the scope of delivery
General Contact	ct connection method: Crimp connection

#### Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
   The products must be regularly inspected for damage.
   Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- · Only use tools recommended by Phoenix Contact
- Use a protective cap to protect connectors that are not in use.



1554623

https://www.phoenixcontact.com/us/products/1554623

	The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	<ul> <li>Ensure that the protective or functional ground has been properly connected.</li> </ul>
	<ul> <li>VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li> </ul>
	<ul> <li>The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul>
Mounting	
Mounting type	Front mounting Pg9 With locking nut
Assembly note	With locking nut
Product proportios	
Product properties	
Product type	Circular connectors (device side)
Application	Signal
Sensor type	Universal
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	A M12
Thread type	IVITZ
Data management status	
Article revision	09
Insulation characteristics	
Overvoltage category	II
Degree of pollution	3
Material specifications	
Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66 GF
Material for screw connection	Stainless steel
Conductor material	Tin-plated Cu litz wires
Electrical properties	
Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
	2 11122



1554623

https://www.phoenixcontact.com/us/products/1554623

Nominal voltage U <sub>N</sub>	60 V (AC)
	60 V (DC)
Nominal current I <sub>N</sub>	4 A
Max. conductor resistance	57.6 Ω/km

### Connection data

#### Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross section	0.34 mm²
Tightening torque	2 Nm 3 Nm (Installation-side)

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 100
meetical, maranara, ejelee	.00

### Connector

### Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Head locking type	Standard
Coding	A

### Connection 2

Head design	free cable end

### Cable/line

Cable length	0.5 m
Cable type	TPE litz wire
Signal type/category	Universal
Wire diameter incl. insulation	1.2 mm ±0.07 mm
Single wire, color	black, brown,blue, white, gray
Cable cross section	0.34 mm²
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Material wire insulation	TPE
Thickness, insulation	0.21 mm
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	≤ 57.6 Ω/km



1554623

https://www.phoenixcontact.com/us/products/1554623

Cable insulation resistance	≥ 20 MΩ*km
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)

## Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP65/IP67/IP69/IP69K
	IP65/IP67/IP69K
Ambient temperature (operation)	-25 °C 85 °C
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

## Standards and regulations


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101



1554623


https://www.phoenixcontact.com/us/products/1554623

## Drawings

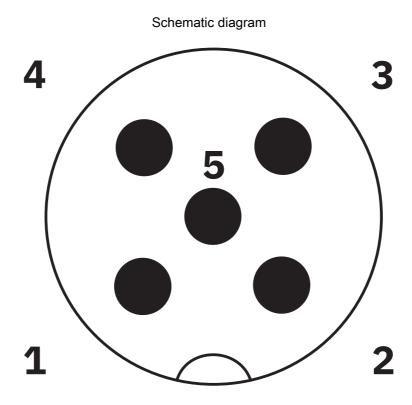

Pin assignment M12 male connector, 5-pos., A-coded, male side


## Circuit diagram

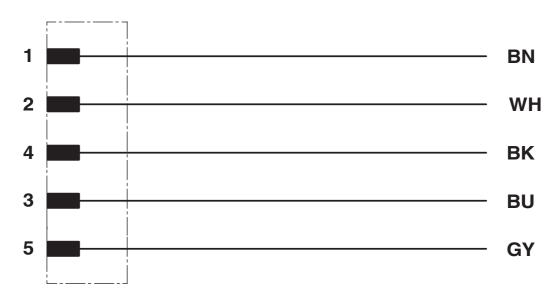



1554623

https://www.phoenixcontact.com/us/products/1554623

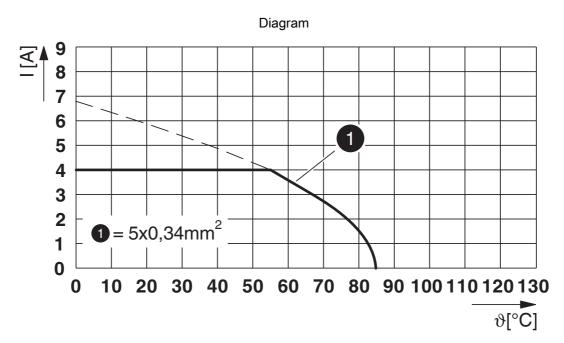

I = current strength, T = ambient temperature



1554623

https://www.phoenixcontact.com/us/products/1554623

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1554623

cUL Recognized Approval ID: E118976-20100522					
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use gro	oup keine				
		60 V	4 A	22 - 22	-

UL Recognized Approval ID: E118976-2	UL Recognized Approval ID: E118976-20100522			
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group keine				
	60 V	4 A	22 - 22	-

CULus Recognia Approval ID: E221	cULus Recognized Approval ID: E221474-20140616			
	Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group keine				
	60 V	4 A	22 - 20	-

cULus Recognized



1554623

https://www.phoenixcontact.com/us/products/1554623

## Classifications

### **ECLASS**

_ `	202.00			
	ECLASS-11.0	27440102		
	ECLASS-12.0	27440116		
	ECLASS-13.0	27440116		
ETIM				
	ETIM 9.0	EC002635		
UNSPSC				
	UNSPSC 21.0	39121400		



1554623

https://www.phoenixcontact.com/us/products/1554623

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions	
China RoHS		
Environment friendly use period (EFUP)	EFUP-E	
	No hazardous substances above the limits	
EU REACH SVHC		
REACH candidate substance (CAS No.)	No substance above 0.1 wt%	

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com