

1554636

https://www.phoenixcontact.com/us/products/1554636

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 8-position, Pin, straight, M12-Standard, coding: A, on free cable end, Front mounting, Pg9, Individual wires, cable length: 0.5 m,  $0.25 \text{ mm}^2$ , TPE litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240039

### Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut

### Commercial data

Item number	1554636		
Packing unit	1 pc		
Minimum order quantity	1 pc		
Sales key	AB24		
Product key	ABQCUE		
Catalog page	Page 268 (C-2-2013)		
GTIN	4046356170352		
Weight per piece (including packing)	31.9 g		
Weight per piece (excluding packing)	29.5 g		
Customs tariff number	85444290		
Country of origin	DE		



1554636

https://www.phoenixcontact.com/us/products/1554636

### Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery
General	Contact connection method: Crimp connection

### Mounting

Mounting type	Front mounting Pg9 With locking nut	
Assembly instructions	With locking nut	

#### Product properties

Product type	Circular connectors (device side)	
Application	Signal	
Sensor type	Universal	
Number of positions	8	
No. of cable outlets	1	
Shielded	no	
Coding	A	
Thread type	M12	

Overvoltage category	II
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	V0	
Seal material	NBR	
Contact material	CuZn	
Contact surface material	Au	
Contact carrier material	PA 66 GF	
Material for screw connection	Stainless steel	
Conductor material	Tin-plated Cu litz wires	

### Electrical properties

Rated surge voltage	0.8 kV	
Contact resistance	≤ 3 mΩ	
Insulation resistance	> 100 MΩ	
Nominal voltage U <sub>N</sub>	30 V (AC)	



### 1554636

https://www.phoenixcontact.com/us/products/1554636

	30 V (DC)		
Nominal current I <sub>N</sub> 2 A			
Max. conductor resistance	80 Ω/km		
Connection data			
Conductor connection			
Connection method	Individual wires		
Contact connection type Pin			
Conductor cross section	0.25 mm <sup>2</sup>		
Tightening torque	3 Nm 4 Nm (Installation-side)		
lechanical properties			
Mechanical data			
Insertion/withdrawal cycles	> 100		
Connector			
Connection 1			
Head design	Pin		
Head cable outlet	straight		
Head thread type	M12		
Head locking type	Standard		
Coding	A		
Connection 2			
Head design	free cable end		
Cable/line			
Cable length	0.5 m		
Cable type	TPE litz wire		
Signal type/category	Universal		
Wire diameter incl. insulation	1.15 mm ±0.07 mm		
Single wire, color	brown, blue, white, gray, pink, green, yellow, red		
Cable cross section	0.25 mm <sup>2</sup>		
Conductor material	Tin-plated Cu litz wires		
Conductor structure signal line	14x 0.15 mm		
AWG signal line	24		
Material wire insulation	TPE		
Thickness, insulation	0.21 mm		
Nominal voltage, cable	300 V		
Test voltage, cable	2000 V AC		
Cable resistance	≤ 80 Ω/km		
Cable insulation resistance	≥ 20 MΩ*km		



#### 1554636

https://www.phoenixcontact.com/us/products/1554636

Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)
Environmental and real-life conditions	
Ambient conditions	
Degree of protection	IP65/IP67/IP69/IP69K
	IP65/IP67/IP69K
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)
Standards and regulations	


Standard designation	M12 connector	
Standards/specifications	IEC 61076-2-101	




1554636


https://www.phoenixcontact.com/us/products/1554636

Drawings

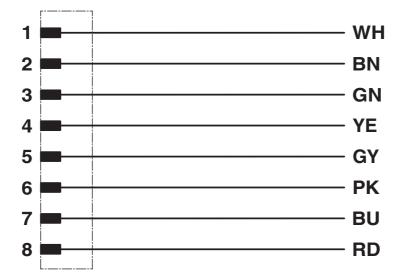

Circuit diagram



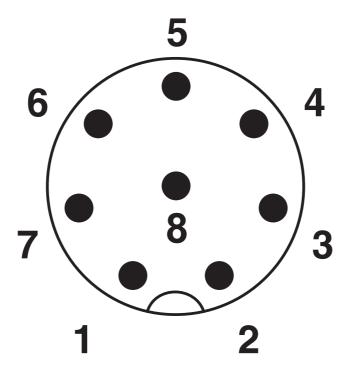

Pin assignment M12 plug, 8-pos., view plug side



1554636

https://www.phoenixcontact.com/us/products/1554636

### Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1554636

UL Recognized       Approval ID: E118976-20100522					
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>	
	30 V	2 A	24 - 24	-	

c <b>911</b> us	CULus Recognized Approval ID: E221474-20140616					
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>	
		30 V	2 A	24 - 22	-	



1554636

https://www.phoenixcontact.com/us/products/1554636

### Classifications

### ECLASS

	ECLASS-11.0	27440102
	ECLASS-12.0	27440116
	ECLASS-13.0	27440116
ETIM		
	ETIM 9.0	EC002635
UNSPSC		
	UNSPSC 21.0	39121400



1554636

https://www.phoenixcontact.com/us/products/1554636

### Environmental product compliance

#### EU RoHS

Yes
6(c)
EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
Lead(CAS: 7439-92-1)
a8c4610d-abe1-46ab-9472-3551c16946e1



1554636

https://www.phoenixcontact.com/us/products/1554636

Accessories

SACC-PG9-SEAL CLM - Flat gasket

1556320 https://www.phoenixcontact.com/us/products/1556320

Pg9 flat gasket, for M12 flush-type connectors with Pg9 fastening thread



### PROT-M12 FS - Sealing cap

1560251 https://www.phoenixcontact.com/us/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field



1554636

https://www.phoenixcontact.com/us/products/1554636

PROT-M12 FS-M - Sealing cap

#### 1430488

https://www.phoenixcontact.com/us/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com