

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746

<https://www.phoenixcontact.com/it/products/1554746>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Pin, straight, M12, coding: A, Rear mounting, Pg9, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240044

## Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design

## Commercial data

Item number	1554746
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	ABQ
Product key	ABQEOL
Catalog page	Page 193 (C-2-2013)
GTIN	4046356170413
Weight per piece (including packing)	15.685 g
Weight per piece (excluding packing)	14.9 g
Customs tariff number	85366990
Country of origin	DE

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746

<https://www.phoenixcontact.com/it/products/1554746>

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

### Mounting

Mounting type	Rear mounting Pg9 With locking nut
Assembly note	With locking nut

### Product properties

Product type	Circular connectors (device side)
Number of positions	5
Shielded	no
Coding	A
Thread type	M12

### Data management status

Article revision	06
------------------	----

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Dimensions

Length of the solder pin	6 mm
	6 mm

### Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Stainless steel

### Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746

<https://www.phoenixcontact.com/it/products/1554746>

Nominal voltage $U_N$	60 V
Nominal current $I_N$	4 A
Test voltage	1.5 kV

## Connection data

### Conductor connection

Connection method	Solder pins
Contact connection type	Pin
Tightening torque	3 Nm ... 4 Nm (Installation-side)

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Coding	A

## Cable/line

Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
	-25 °C ... 85 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65/IP67/IP69/IP69K
	IP65/IP67/IP69K
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)

## Standards and regulations

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting




1554746

<https://www.phoenixcontact.com/it/products/1554746>

## Drawings

Schematic diagram

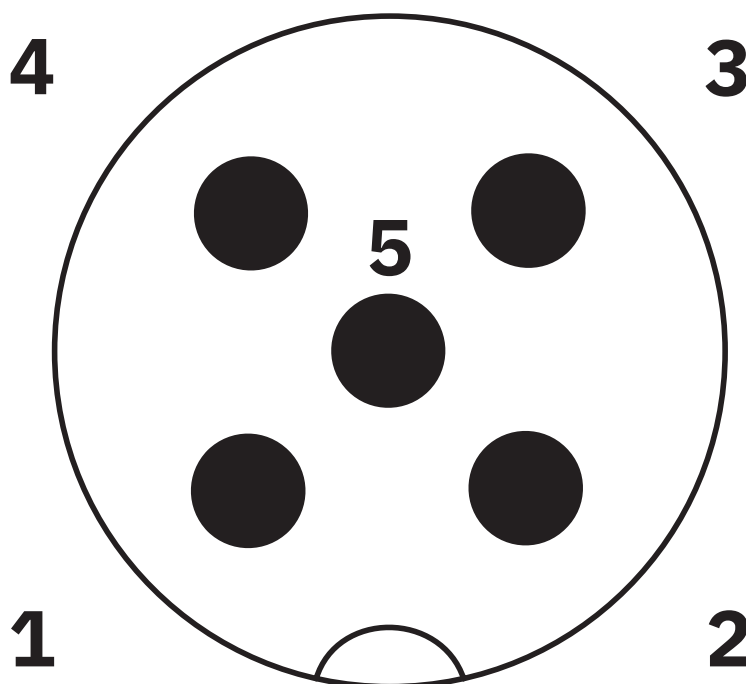

Pin assignment M12 plug, 8-pos., view plug side


# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting





1554746  
<https://www.phoenixcontact.com/it/products/1554746>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/1554746>

 <b>cUL Recognized</b> Approval ID: E118976-20100522				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	60 V	4 A	22 - 22	-

 <b>UL Recognized</b> Approval ID: E118976-20100522				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	60 V	4 A	22 - 22	-

 <b>cULus Recognized</b> Approval ID: E221474-20140616				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	60 V	4 A	-	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746

<https://www.phoenixcontact.com/it/products/1554746>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746  
<https://www.phoenixcontact.com/it/products/1554746>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	02dae83b-6b32-4199-a758-56e7c6573d95

# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746

<https://www.phoenixcontact.com/it/products/1554746>

## Accessories

### SACC-PG9-SEAL CLM - Flat gasket

1556320

<https://www.phoenixcontact.com/it/products/1556320>

Pg9 flat gasket, for M12 flush-type connectors with Pg9 fastening thread



---

### PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/it/products/1560251>

M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field





# SACC-DSI-M12MS-5CON-L180 VA - Device connector rear mounting



1554746

<https://www.phoenixcontact.com/lt/products/1554746>

## PROT-M12 FS-M - Sealing cap

1430488

<https://www.phoenixcontact.com/lt/products/1430488>



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact UAB  
Svitrigailos str. 11B  
03228 Vilnius  
+370 5 2106321  
[balticinfo@phoenixcontact.com](mailto:balticinfo@phoenixcontact.com)