

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable



1555402

<https://www.phoenixcontact.com/za/products/1555402>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 17-position, free cable end, on Socket angled M12 SPEEDCON, coding: A, cable length: 5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Save time, thanks to installation with SPEEDCON fast locking system
- Save space – with high-pos. connectors

Commercial data

Item number	1555402
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	021
Product key	BF1CGA
Catalog page	Page 213 (C-2-2019)
GTIN	4046356176682
Weight per piece (including packing)	328,8 g
Weight per piece (excluding packing)	327 g
Customs tariff number	85444290
Country of origin	DE

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable



1555402

<https://www.phoenixcontact.com/za/products/1555402>

Technical data

Product properties

Product type	Sensor/actuator cable
Number of positions	17
Application	Standard
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 10 \text{ M}\Omega$
Nominal voltage U_N	30 V AC
	30 V DC
Nominal current I_N	1.5 A
Protective circuit	unwired

Signaling

Status display	No
Status display present	No

Connection data

Conductor connection

Tightening torque	0.4 Nm (M12 connector)
-------------------	------------------------

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable



1555402

<https://www.phoenixcontact.com/za/products/1555402>

Type	Socket angled M12 SPEEDCON
Number of positions	17
Locking type	SPEEDCON
Coding type	A

Cable/line

Cable length	5 m
--------------	-----

PVC black [PVC]

Dimensional drawing	
Number of positions	17
Shielded	no
Cable type	PVC black [PVC]
Conductor structure signal line	18x 0.10 mm
AWG signal line	26
Conductor cross section	17x 0.14 mm ² (Signal line)
Wire diameter incl. insulation	1 mm ±0.05 mm (Signal line)
External cable diameter	6.8 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	white, brown, green, yellow, gray, pink, blue, red, black, violet, gray-pink, red-blue, white-green, brown-green, white-yellow, yellow-brown, white-gray
Overall twist	17 wires twisted in layers
Max. conductor resistance	≤ 142 Ω/km (at 20 °C)
Insulation resistance	> 10 MΩ*km
Nominal voltage, cable	250 V
Test voltage Core/Core	1500 V AC
Smallest bending radius, fixed installation	34 mm
Smallest bending radius, movable installation	102 mm
Flame resistance	DIN EN 50265-2-1
Ambient temperature (operation)	-25 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable



1555402

<https://www.phoenixcontact.com/za/products/1555402>

Ambient conditions

Degree of protection	IP65
	IP67
	IP68
Ambient temperature (operation)	-25 °C ... 85 °C (Socket)
	-5 °C ... 80 °C (Cable, flexible installation)
	-25 °C ... 80 °C (cable, fixed installation)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable


1555402

<https://www.phoenixcontact.com/za/products/1555402>




Drawings

Circuit diagram

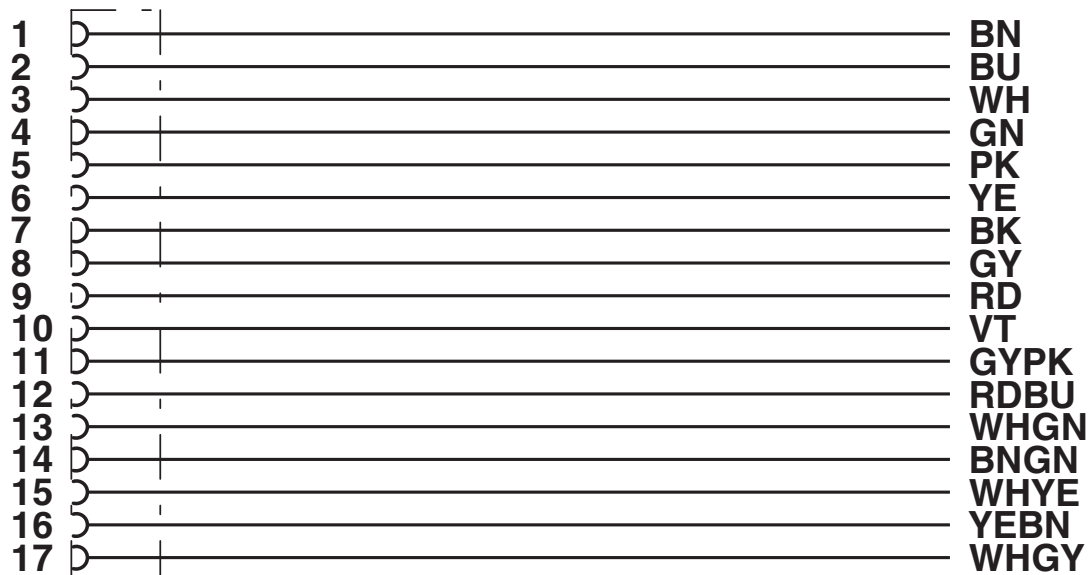


Dimensional drawing

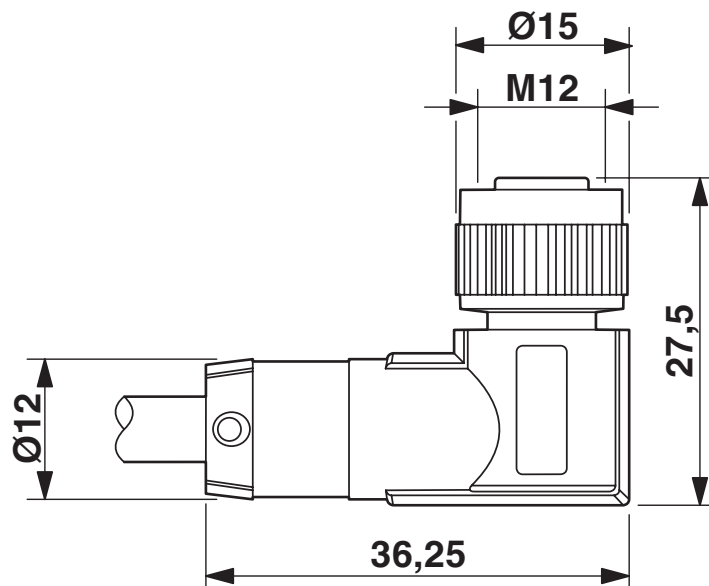

M12-SPEEDCON socket, angled

Schematic diagram

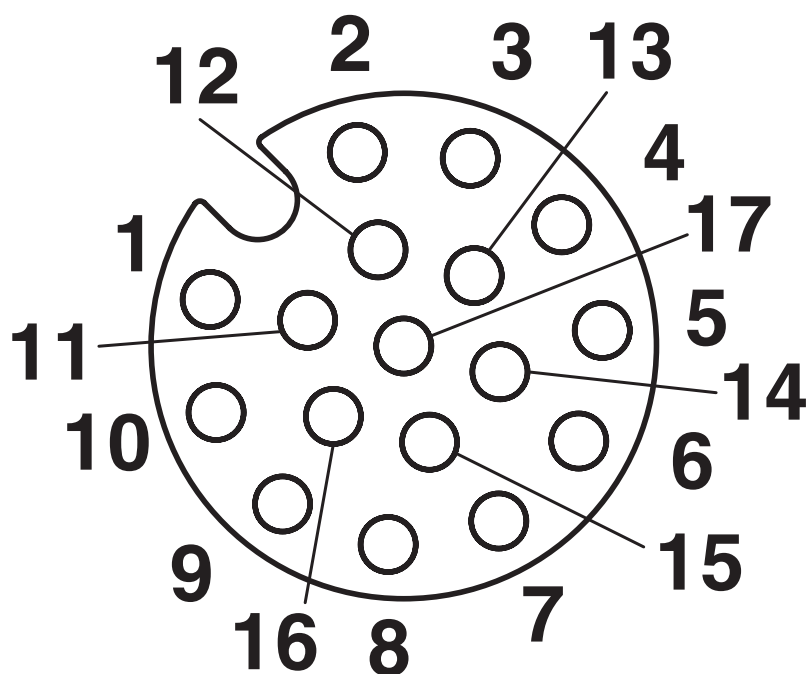

Pin assignment M12, 17-pos., socket side view

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable



1555402

<https://www.phoenixcontact.com/za/products/1555402>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/za/products/1555402>

	UL Listed Approval ID: FILE E 221474			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	30 V	1 A	-	-

	EAC-RoHS Approval ID: RU D-DE.HB35.B.00387
--	--

SAC-17P- 5,0-PVC/FR SCO - Sensor/actuator cable



1555402

<https://www.phoenixcontact.com/za/products/1555402>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (Pty) Ltd.
36 Lyn Road P.O. Box 916 ZA-Ferndale 2160

+27/11/801-8200
info@phoenixcontact.co.za