

# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable



1555693

<https://www.phoenixcontact.com/us/products/1555693>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 0.5 m

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Save time, thanks to installation with SPEEDCON fast locking system
- High-performance: connectors and cables with a large conductor cross section for power supply

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1555693             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF03                |
| Product key                          | BF1CCA              |
| Catalog page                         | Page 440 (C-2-2017) |
| GTIN                                 | 4046356173698       |
| Weight per piece (including packing) | 49.4 g              |
| Weight per piece (excluding packing) | 49 g                |
| Customs tariff number                | 85444290            |
| Country of origin                    | PL                  |

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard              |
| Number of positions  | 4                     |
| No. of cable outlets | 1                     |
| Shielded             | no                    |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 250 V AC                   |
|                       | 250 V DC                   |
| Nominal current $I_N$ | 4 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | no |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |        |
|-------------------|--------|
| Tightening torque | 0.4 Nm |
|-------------------|--------|

### Connector

#### Connection 1

# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable



1555693

<https://www.phoenixcontact.com/us/products/1555693>

|                     |                            |
|---------------------|----------------------------|
| Type                | Plug straight M12 SPEEDCON |
| Number of positions | 4                          |
| Locking type        | SPEEDCON                   |
| Coding type         | A                          |


## Connection 2

|                     |                              |
|---------------------|------------------------------|
| Type                | Socket straight M12 SPEEDCON |
| Number of positions | 4                            |
| Locking type        | SPEEDCON                     |
| Coding type         | A                            |

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 0.5 m |
|--------------|-------|

## PUR POWER 0.75 mm² black [186]

|                                 |                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing             |  |
| Cable weight                    | 57 kg/km                                                                            |
| UL AWM Style                    | 20549 / 1061 (80°C/300 V)                                                           |
| Number of positions             | 4                                                                                   |
| Shielded                        | no                                                                                  |
| Cable type                      | PUR POWER 0.75 mm² black [186]                                                      |
| Conductor structure signal line | 42x 0.15 mm                                                                         |
| AWG signal line                 | 18                                                                                  |
| Conductor cross section         | 4x 0.75 mm² (power line)                                                            |
| Wire diameter incl. insulation  | 1.75 mm ±0.05 mm                                                                    |
| External cable diameter         | 5.90 mm ±0.15 mm                                                                    |
| Outer sheath, material          | PUR                                                                                 |
| External sheath, color          | black-gray RAL 7021                                                                 |
| Conductor material              | Bare Cu litz wires                                                                  |
| Material wire insulation        | PVC                                                                                 |
| Single wire, color              | brown, white, blue, black                                                           |
| Thickness, insulation           | ≥ 0.23 mm (Core insulation)<br>≥ 0.76 mm (Outer cable sheath)                       |
| Overall twist                   | 4 wires, twisted                                                                    |
| Max. conductor resistance       | max. 26 Ω/km (at 20 °C)                                                             |
| Insulation resistance           | ≥ 1 MΩ*km (at 20 °C)                                                                |
| Nominal voltage, cable          | ≤ 300 V                                                                             |
| Test voltage                    | ≥ 3000 V                                                                            |

# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable



1555693

<https://www.phoenixcontact.com/us/products/1555693>

|                                               |                                                                                                                            |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Minimum bending radius, fixed installation    | 5 x D                                                                                                                      |
| Minimum bending radius, flexible installation | 10 x D                                                                                                                     |
| Smallest bending radius, fixed installation   | 30 mm                                                                                                                      |
| Smallest bending radius, movable installation | 59 mm                                                                                                                      |
| Dynamic load capacity (bending)               | Max. bending cycles: 2000000, Bending radius: 59 mm,<br>Traversing path: 5 m, Traversing rate: 3 m/s, Acceleration: 5 m/s² |
| Flame resistance                              | according to UL 758/1581 (horizontal)<br>in accordance with UL 758/1581 FT2                                                |
| Resistance to oil                             | According to DIN EN 60811-2-1, 168 h at 100°C                                                                              |
| Other resistance                              | hydrolysis and microbe resistant<br>Low adhesion<br>abrasion-resistant<br>Resistant to salt water                          |
| Ambient temperature (operation)               | -25 °C ... 80 °C (cable, fixed installation)<br>-5 °C ... 80 °C (Cable, flexible installation)                             |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Degree of protection            | IP65<br>IP67                                                                                                                       |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket)<br>-25 °C ... 80 °C (cable, fixed installation)<br>-5 °C ... 80 °C (Cable, flexible installation) |

## Standards and regulations

### M12

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |

# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable




1555693

<https://www.phoenixcontact.com/us/products/1555693>


## Drawings

Dimensional drawing

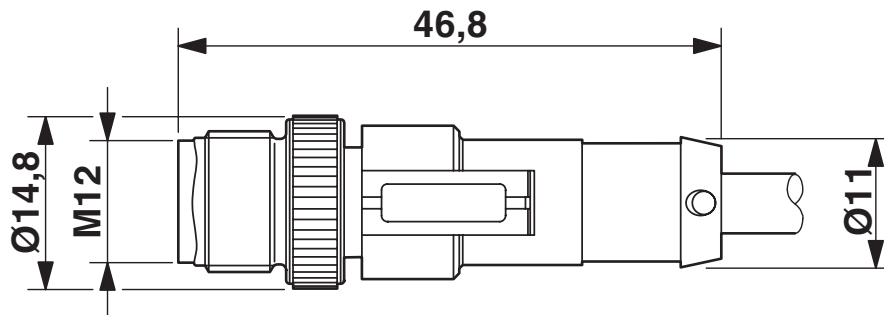


M12 SPEEDCON plug, straight

Schematic diagram

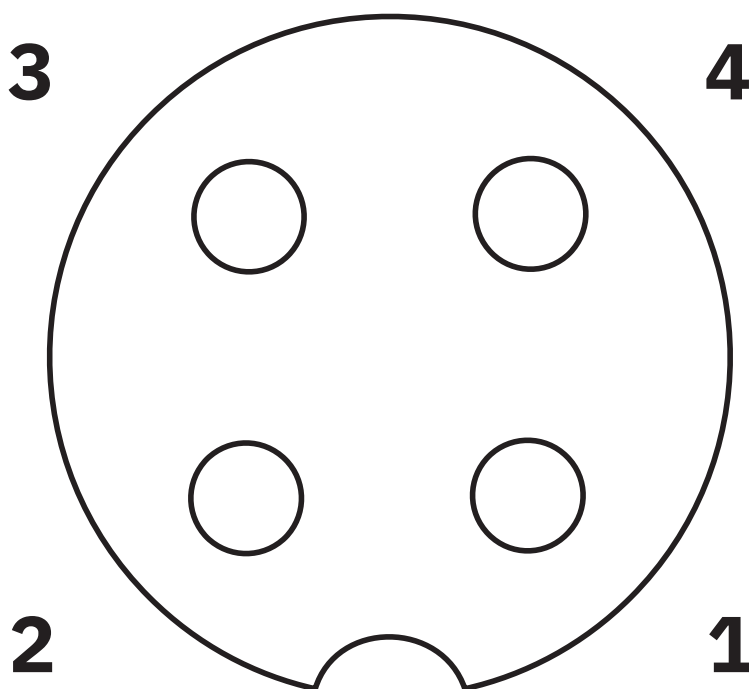


Pin assignment M12 socket, 4-pos., A-coded, view female side

Circuit diagram

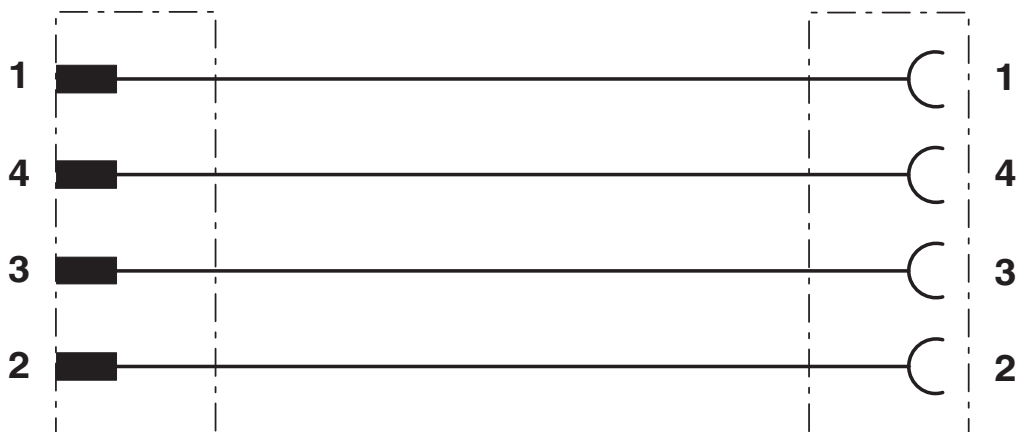


Schematic diagram

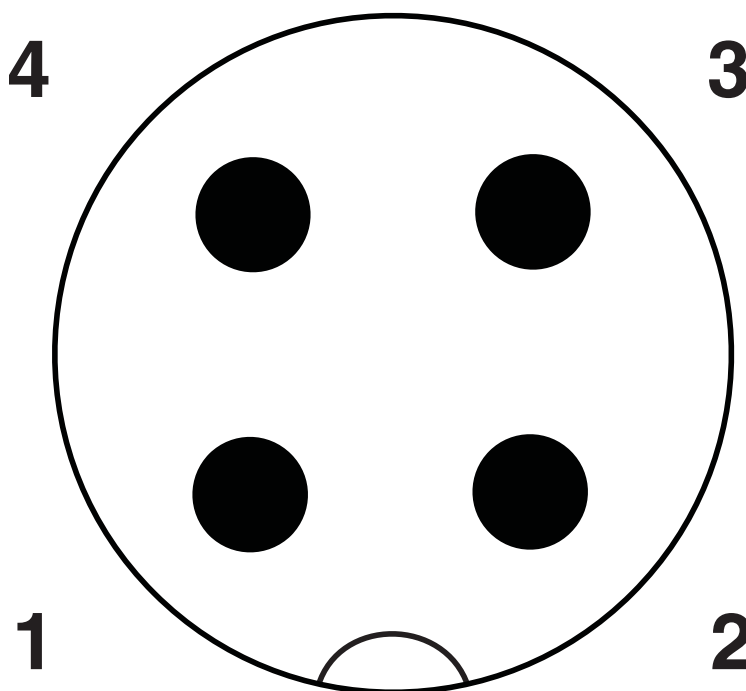

Pin assignment M12 plug, 4-pos., A-coded, view plug side

Dimensional drawing

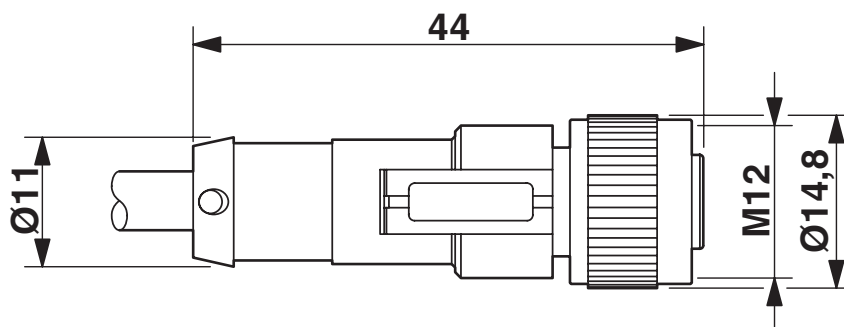

M12-SPEEDCON socket, straight

# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable



1555693

<https://www.phoenixcontact.com/us/products/1555693>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1555693>

|  |                                                |                       |                   |                             |
|--|------------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>UL Listed</b><br>Approval ID: FILE E 221474 |                       |                   |                             |
|  | Nominal voltage $U_N$                          | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|  | 300 V                                          | 4 A                   | -                 | -                           |

|  |                                                 |                       |                   |                             |
|--|-------------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                       |                   |                             |
|  | Nominal voltage $U_N$                           | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|  | 300 V                                           | 4 A                   | -                 | -                           |

|  |                                                      |  |  |  |
|--|------------------------------------------------------|--|--|--|
|  | <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |
|  |                                                      |  |  |  |

|                     |
|---------------------|
| <b>cULus Listed</b> |
|---------------------|



# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable



1555693

<https://www.phoenixcontact.com/us/products/1555693>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-4P-MS/ 0,5-186/FS SCO - Sensor/actuator cable



1555693

<https://www.phoenixcontact.com/us/products/1555693>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)