

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through



1582565

<https://www.phoenixcontact.com/no/products/1582565>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, product family: QPD, connection method: Single wires (Welded-on), number of positions: 4+PE, M25, Pin, 1 mm² ... 2.5 mm², 690 V, 20 A, PA, black, without QUICKON nut, 2.5 mm², wires cut flat at the end, cable length: 0.5 m

Your advantages

- Innovative and time saving - QUICKON fast connection for time saving of up to 80 % for on-site connection
- Robust throughout: housing with IP68/IP69K and IK07 protection for a wide range of applications
- Safer connection with mechanical coding to protect against mismatching, and touch-proof protection in accordance with DIN EN 0105
- Efficient - by using panel feed-throughs, devices no longer need to be opened in order to connect cables

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1582565 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | 31BBF |
| Product key | BF6ACB |
| Catalog page | Page 484 (C-2-2019) |
| GTIN | 4046356661980 |
| Weight per piece (including packing) | 110.9 g |
| Weight per piece (excluding packing) | 109.9 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through



1582565

<https://www.phoenixcontact.com/no/products/1582565>

Technical data

Product properties

| | |
|------------------------------------|--------------------|
| Type | QPD 5x2,5 |
| Product type | Panel feed-through |
| Product family | QPD |
| Number of positions | 5 |
| Connection profile | 4+PE |
| Position marking | 1, 2, 3, N, PE |
| Number of connections | 10 |
| Number of connections per position | 1 |
| Coding | coded |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Connection data

Connection technology

| | |
|---|--------------------------|
| Connection method On the device side | Single wires (Welded-on) |
| Frequency of connections between conductors of the same cross section | max. 10 |

Conductor connection


| | |
|----------------------------------|---|
| Conductor cross section flexibel | 1 mm ² ... 2.5 mm ² |
| Conductor cross section solid | 1 mm ² ... 2.5 mm ² |
| Connection cross section AWG | 16 ... 14 |
| Tightening torque Union nut | 10 Nm |
| Tightening torque Locking nut | 5 Nm |
| Wrench size Union nut | 27 mm |
| Wrench size Locking nut | 30 mm |

Pin assignment

| | |
|---|-----------|
| Contact Color (signal designation) Contact (optional) | 1 BK |
| | 2 BN |
| | 3 GY |
| | N BU |
| | PE GNYE |

Dimensions

Dimensional drawing

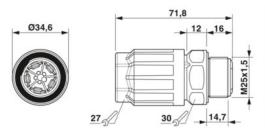

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through



1582565

<https://www.phoenixcontact.com/no/products/1582565>

| | |
|--------------------------|---------|
| Width | 34.6 mm |
| Height | 34.6 mm |
| Length | 53 mm |
| Diameter | 34.6 mm |
| Wrench size for mounting | 27 mm |

Electrical properties

| | |
|-----------------------------|----------|
| Rated surge voltage (II/2) | 8 kV |
| Rated surge voltage (III/2) | 8 kV |
| Rated surge voltage (III/3) | 6 kV |
| Rated current | 20 A |
| Contact resistance | < 3 mΩ |
| rated voltage (II/2) | 1000 V |
| rated voltage (III/2) | 1000 V |
| Rated voltage (III/3) | 690 V |
| Nominal voltage U_N | 690 V AC |
| | 690 V DC |
| Nominal current I_N | 20 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|---------|
| Insertion/withdrawal cycles | max. 50 |
|-----------------------------|---------|

Material specifications

| | |
|--|------------------------|
| Color | black (RAL 9005) |
| Material Housing | PA |
| Material Contact | Cu |
| Material Contact surface | Silver-plated |
| Flammability rating according to UL 94 | V0 |
| Material wire insulation | PVC /PE / rubber / TPE |

Cable/line

| | |
|---|--|
| Cable length | 0.5 m |
| Structure of individual litz in acc. with VDE 0295 / smallest wire diameter | VDE 0295 class 1 to 6/min. 0.15 mm |
| Wire diameter including insulation | 2 mm ... 3.8 mm |
| Position marking | 1, 2, 3, N, PE |
| Single wire, color | black, brown, gray, blue, green/yellow |
| Cable cross section | 2.5 mm ² |
| Material wire insulation | PVC/PE/TPE/rubber |

Mounting

| | |
|---------------|--------------------|
| Mounting type | Front mounting M25 |
| Wrench size | 27 mm |

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through

1582565

<https://www.phoenixcontact.com/no/products/1582565>



Environmental and real-life conditions

Ambient conditions

| | |
|---|-------------------|
| Degree of protection | IP66 |
| | IP68 (2 m / 24 h) |
| | IP69K |
| Ambient temperature (operation) | -40 °C ... 100 °C |
| Temperature when conductor connected | -5 °C ... 50 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through




1582565

<https://www.phoenixcontact.com/no/products/1582565>


Drawings

Dimensional drawing

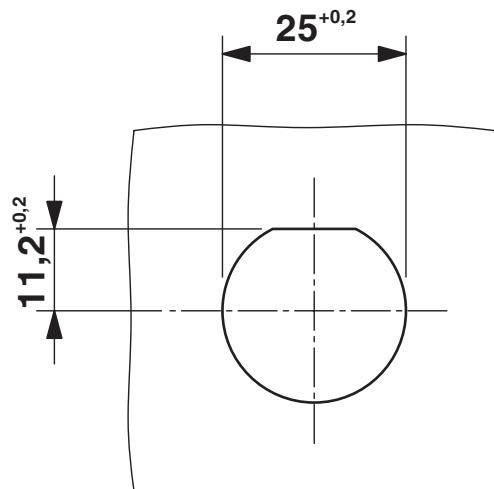

Panel cutout

Dimensional drawing

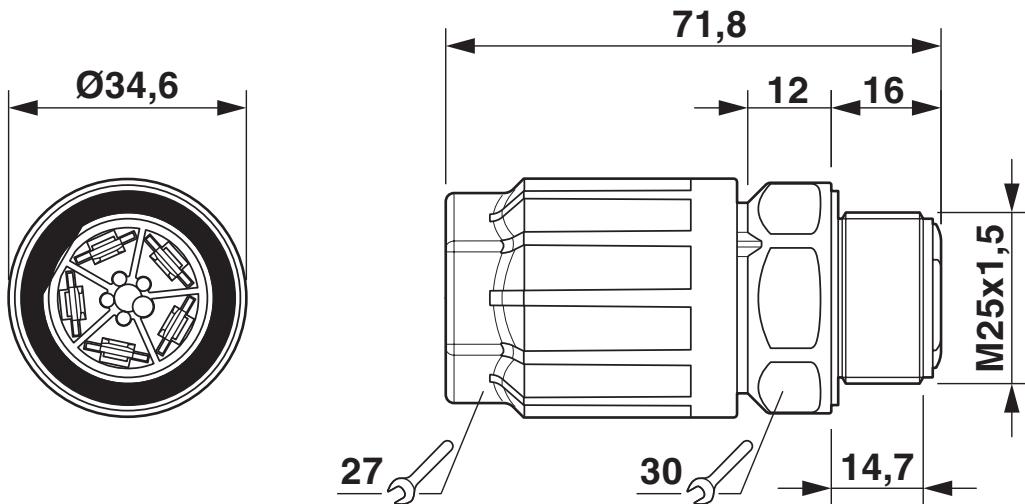

QPD W 4PE2.5 M25 dimensional drawing

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through

1582565

<https://www.phoenixcontact.com/no/products/1582565>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/no/products/1582565>



IECEE CB Scheme

Approval ID: DE1-65875



EAC

Approval ID: RU C-DE.BL08.B.00511



DNV GL

Approval ID: TAE00003J5



VDE Zeichengenehmigung

Approval ID: 40029149



UL Listed

Approval ID: E468743

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | 600 V | 10 A | - | - 14 |



cUL Listed

Approval ID: E468743

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | 600 V | 10 A | - 14 | - |

cULus Listed

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through

1582565

<https://www.phoenixcontact.com/no/products/1582565>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440602 |
| ECLASS-13.0 | 27440602 |
| ECLASS-12.0 | 27440602 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002566 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121500 |
|-------------|----------|

QPD W 4PE2,5 M25 0,5 BK - Panel feed-through

1582565

<https://www.phoenixcontact.com/no/products/1582565>



Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values |
|------------|---|

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT AS
Strømsveien 344
N-1081 Oslo
+47 22 07 68 00
norge@phoenixcontact.com